

**SHARE**


Technology • Connections • Results

# z/OS Sysprog Goody Bag

Speaker Name: Bob Rogers  
Speaker Company: IBM Corporation

Date of Presentation: Thursday March 3, 2011  
Session Number: 8692





**SHARE**  
Technology • Connections • Results

# Trademarks

The following are trademarks of the International Business Machines Corporation in the United States, other countries, or both.

Not all common law marks used by IBM are listed on this page. Failure of a mark to appear does not mean that IBM does not use the mark nor does it mean that the product is not actively marketed or is not significant within its relevant market.

Those trademarks followed by ® are registered trademarks of IBM in the United States; all others are trademarks or common law marks of IBM in the United States.

For a complete list of IBM Trademarks, see [www.ibm.com/legal/copytrade.shtml](http://www.ibm.com/legal/copytrade.shtml):

\*, AS/400®, e business (logo)®, DBE, ESCO, eServer, FICON, IBM®, IBM (logo)®, iSeries®, MVS, OS/390®, pSeries®, RS/6000®, S/30, VM/ESA®, VSE/ESA, WebSphere®, xSeries®, z/OS®, zSeries®, z/VM®, System i, System i5, System p, System p5, System x, System z, System z9®, BladeCenter®

## The following are trademarks or registered trademarks of other companies.

Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.

Cell Broadband Engine is a trademark of Sony Computer Entertainment, Inc. in the United States, other countries, or both and is used under license therefrom.

Java and all Java-based trademarks are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

Intel, Intel logo, Intel Inside, Intel Inside logo, Intel Centrino, Intel Centrino logo, Celeron, Intel Xeon, Intel SpeedStep, Itanium, and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.

ITIL is a registered trademark, and a registered community trademark of the Office of Government Commerce, and is registered in the U.S. Patent and Trademark Office.

IT Infrastructure Library is a registered trademark of the Central Computer and Telecommunications Agency, which is now part of the Office of Government Commerce.

\* All other products may be trademarks or registered trademarks of their respective companies.

### Notes:

Performance is in Internal Throughput Rate (ITR) ratio based on measurements and projections using standard IBM benchmarks in a controlled environment. The actual throughput that any user will experience will vary depending upon considerations such as the amount of multiprogramming in the user's job stream, the I/O configuration, the storage configuration, and the workload processed. Therefore, no assurance can be given that an individual user will achieve throughput improvements equivalent to the performance ratios stated here.

IBM hardware products are manufactured from new parts, or new and serviceable used parts. Regardless, our warranty terms apply.

All customer examples cited or described in this presentation are presented as illustrations of the manner in which some customers have used IBM products and the results they may have achieved. Actual environmental costs and performance characteristics will vary depending on individual customer configurations and conditions.

This publication was produced in the United States. IBM may not offer the products, services or features discussed in this document in other countries, and the information may be subject to change without notice. Consult your local IBM business contact for information on the product or services available in your area.


All statements regarding IBM's future direction and intent are subject to change or withdrawal without notice, and represent goals and objectives only.

Information about non-IBM products is obtained from the manufacturers of those products or their published announcements. IBM has not tested those products and cannot confirm the performance, compatibility, or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

Prices subject to change without notice. Contact your IBM representative or Business Partner for the most current pricing in your geography.

**SHARE**  
in Anaheim  
2011

# z/OS 1.12 Overview



**SHARE**

Technology & Product Results

## *Improving Usability and Skills*


zDAC, VARY CU, RMF support for 4K reporting classes, Multiple TSO/E logons in a JESplex, METAL C headers for Health Checker and sample check, Health check history display, More checks, z/OSMF WLM Policy Editor, Incident Log improvements, ...

## *Integrating new Applications and Supporting Industry and Open Standards*

XML dynamic schema and fragment parsing; Language Environment support for calendar dates beyond 2038, C/C++ BSAM Record I/O for >64K tracks, and VSAM AIX in EAS on EAV; z/OS UNIX support for FILEDATA=RECORD ...

## *Scalability & Performance*

EAV support for more data set types & more exploiters, Duplicate Temporary DSNs, Large Pages for NUCLEUS, DFSMSdss Dump/Restore/ Copydump performance, VSAM/RLS Striping, XTIOT ...

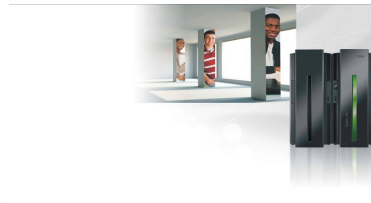

## *Enhancing Security*

VISA smart card support, LDAP ACL by IP address and password policy; PKI Services multibyte character support; ECC support in RACF, System SSL, and PKI; Health Checker support for BPX.SUPERUSER, SAF controls on sysplex-scope CPF commands, ...

## *Improving Availability*

CA Reclaim, XCF monitoring of critical members; SMF record flood detection and automation, filtering and Predictive Failure analysis, MTTR, Run Time Diagnostics ...

## *Self Managing Capabilities*

Capacity Provisioning interval averaging, CP monitoring of CICS and IMS transaction classes, Improved WLM batch management, WTOR Auto-Reply, IMBED/REPLICATE removal on Recall/Restore ...

## *Extending the Network*

Continued focus on IPV6 and security related RFCs, TN3270 Virtual Storage Constraint Relief, AT-TLS Improvements, ...

**SHARE**  
in Anaheim  
2011

# z/OS Release 12



- Runtime Diagnostics
- Allocation and Access Method Constraint Relief
- Enhancements to EAV Support
- IDCAMS DELETE of all members of PDS or PDSE
- VSAM CA Reclaim
- Enhancements to Dynamic Exits
- Enhancements to Dynamic LPA and LLA
- New **Vary CU** Command
- Auto-Reply for WTORs
- Less Disruptive SVC Dump Data Capture
- Controlling Discretionary Time Slice
- Setting LE Parameters as non-overrideable
- TSO/E enhancements
- z/OSMF WLM Policy Editor
- And other miscellany

# Runtime Diagnostics

- Runtime Diagnostics can quickly analyze a sick system for the following classes of problems:
  - Component problems emitted as critical messages in OPERLOG
  - ENQ contention for system address spaces
  - Address spaces with lock contention
  - Address spaces using high CPU
  - Address spaces that appear to be in a TCB enabled loop
- Runtime Diagnostics can advise the system programmer what actions to take next
  - Potentially what jobs might need to be cancelled
  - Further investigation on class of resources, or a single address space using a monitor like RMF or Tivoli Omegamon

# Runtime Diagnostics

- Runtime Diagnostics is invoked via a START command from the console
  - START HZR,ANALYZE
- The output of Runtime is a multi-line Write-to-Operator message
  - The Runtime Diagnostics response is issued to the console that issued the START HZR command
    - If the MCS console that issued the START HZR command has an out-of-line display area setup (via a K A,xx) the output will be displayed in the display area
  - The output of Runtime Diagnostics can also be directed to a sequential dataset

# Allocation Constraint Relief

- **Memory Data Set ENQ management**
  - Moves data set ENQ information created by Allocation out of SWA and into efficient memory structures
  - Enabled by installation via MEMDSENQMGMT in ALLOCxx (parmlib) and SETALLOC
  - Requested by program with IEFDDSRV macro
  
- **Suppress DD accounting (in SMF 30 records)**
  - Suppresses creation of SMF Type 30 EXCP section data on a per-DD basis
  - Reduces CPU in Allocation and Unallocation processes
  - Requested by program with S99DASUP flag on DynAlloc

# Unique Temporary Data Set Names

- When `&&tdsnlabel` is specified in the JCL as a DSNNAME, the system-generated qualified name for the temporary dataset may **not** be unique
  - When the JES2 option “`dupl_job=nodelay`” is specified.
  - Multiple jobs with same name execute at the same time, and the DD statements with the same temporary DS names. (i.e. `&&tdslabel`)
- z/OS R12 provides a new statement in `ALLOCxx` to specify the format of temporary data set names when `dsn=&&tdslabel` is coded in the JCL.

## **SYSTEM TEMPDSFORMAT(UNIQUE | INCLUDELABEL)**


- `TEMPDSFORMAT(UNIQUE)` generate temp data set names:  
*SYSddddd.Thhmmss.RA000.jobname.Rggnnnnn*
- `TEMPDSFORMAT(INCLUDELABEL)` generate temp data set names:  
*SYSddddd.Thhmmss.RA000.jobname.tdslabel.Hgg*



# Basic Access Method Support for XTIO



- **Problem:**
  - Middleware like DB2 allocates many BSAM, BPAM and QSAM data sets
  - These access methods have required TIOT and UCB to be below 16MB
  - This limits the number of data sets and constrains virtual below the 16MB line
- **Solution**
  - Provide BSAM, BPAM and QSAM support for the XTIO, UCB nocapture and UCB-above-the-line options of dynamic allocation.
- **Benefit**
  - Virtual Storage Constraint Relief - use less storage below the 16 MB line:
    - Minimum of 20 Bytes for TIOT entry
    - 96 bytes for DSAB
    - Possibly 4096 bytes for UCB not being captured
  - Designed to support more than about 3200 Basic Access Method data sets.
- **Dynamic Allocation Options**
  - XTIO (S99TIOEX) – requires APF authorization
  - DSAB above the line (S99DSABA) – requires APF authorization
  - Nocapture (S99ACUCB)
  - The application itself does not need to run in 31-bit addressing mode



**SHARE**

Technology • Connections • Results

# EAS Eligible data set sets in z/OS

- A data set on an EAV that is eligible to have extents in the extended addressing space and described by extended attribute DSCBs
- Can reside in track or cylinder-managed space
- SMS-managed or non-SMS managed
- Any data set type can reside in track-managed space
- Data set types supported
  - **VSAM data types (KSDS, RRDS, ESDS, linear)**
    - *This covers DB2, IMS, CICS, zFS and NFS*
    - *CA sizes: 1, 3, 5, 7, 9 and 15 tracks*
  - **Sequential (Extended Format)**
  - **Sequential (Basic and Large Format)**
  - **Direct (BDAM)**
  - **Partitioned (PDS, PDSE)**
  - **Catalog (VVDS and BCS)**



**SHARE**  
in Anaheim  
2011

# Non-EAS-eligible data set list



- A data set that may exist on an EAV but is not eligible to have extents in the extended addressing space or have extended attribute DSCBs
  - VSAM data sets with incompatible CA sizes
  - VTOC (still restricted to within first 64K-1 tracks)
  - VTOC index
  - Page data sets
  - VSAM data sets with imbed or keyrange attributes
  - HFS file system
  - XRC Control, Master or Cluster non-VSAM data sets
    - State data set EAS eligible in z/OS V1R12
    - Journal data set EAS eligible in z/OS V1R11 and V1R12
  - Certain system data sets such as SYS1.NUCLEUS

# VSAM CA Reclaim

VSAM KSDSs (key-sequenced data sets) must be “reorganized” on a regular basis in order to:

- Reclaim space previously used by deleted records
- Improve sequential read performance

A “reorganization” consists of:

1. Closing the KSDS
2. Unloading the KSDS to a backup file
3. Deleting and redefining the KSDS
4. Reloading the file from the backup file
5. Reopening the KSDS


# VSAM CA Reclaim

- **Solution**

- Enhance VSAM and VSAM RLS to reclaim empty space (CAs) in KSDSs.
  - Applies to SMS and non-SMS data sets.
- Will resolve the main reasons for KSDS reorganizations:
  - Reclaim space
  - Improve both sequential and direct performance
- Empty sequence set and high level index records will be placed on a free list after the last record in the CA is erased. The reclaimed CA may then be reused as new records are inserted anywhere in the data set.
- Pre-existing empty CAs will not be reclaimed by CA Reclaim. Once all sharing systems are upgraded to z/OS 1.12 and enabled for CA Reclaim, the data sets may need to be reorganized one last time to reclaim any pre-existing empty CAs.

- **Benefit:**

- CA reclaim will address the main reasons for reorganizations
- Helps make data sets available 24 hours a day.



**SHARE**

Technology • Connections • Results


# VSAM CA Reclaim

- CA Reclaim can be enabled/disabled on a system level or on a data set level.
  - CA Reclaim is disabled on a system level by default,
  - But it is **enabled by default** for all KSDSs without having to redefine the data set.
- New system level parameter in SYS1.PARMLIB(IGDSMSxx):  
**CA\_RECLAIM({NONE | DATACLAS})**
- When system level “DATACLAS” is specified, the setting of new data class parameter CA\_Reclaim(Y/N) will be used when the data set is defined to determine whether the data set is eligible for CA reclaim.
  - The CA reclaim attribute in data classes defined prior to z/OS V1R12 defaults to Yes.
- CA Reclaim is disabled for all KSDSs on a system when:
  - **CA\_RECLAIM(NONE)** in PARMLIB and
    - System IPLed
    - RLS VSAM address space is recycled
    - SET SMS=xx issued
  - **SETSMS CA\_RECLAIM(NONE)** issued
- IDCAMS ALTER can disable/enable individual KSDSs after DEFINE time  
**ALTER 'ksdsname' RECLAIMCA/NORECLAIMCA**

## **IDCAMS DELETE of all library members** (either PDS or PDSE)

- Prior to z/OS R12, the IDCAMS DELETE command can delete only one member of a partitioned data set at a time. Wildcards are not allowed for member names. For example:
  - **DELETE A.B(member1)** will delete the member **member1** in the partitioned data set **A.B**
- With R12, DELETE command is enhanced to allow users to specify a single asterisk (\*) as the member name of a PDS or PDSE. This will delete all the members in that PDS or PDSE. For example,
  - **DELETE A.B(\*)** which will delete all the members residing in partitioned data set **A.B**

# More granular accounting in SMF Type 30



**SHARE**  
Technology • Connections • Results

- **SMF30ICU** and **SMF30ISB** include time that was spent “in between” jobs. This includes step initiation and step termination
- New fields are added to the CPU accounting section of the SMF type 30 record:
  - SMF30ICU\_STEP\_INIT
  - SMF30ICU\_STEP\_TERM
  - SMF30ISB\_STEP\_INIT
  - SMF30ISB\_STEP\_TERM
- Time accounting data is now more granular, allowing for greater precision in CPU accounting.



# Program Management Enhancements




- Library Lookaside (LLA)
  - Dynamic Exits
    - *CSVLLIX1 (LLA fetch exit) and CSVLLIX2 (LLA staging exit)*
  - LLA busy
    - *up to 255 MODIFY commands can be started without getting “busy”*
  - LLA automatic restart when SUB=MSTR is omitted
    - *now automatically propagates nn=XY*
- PROGxx parmlib processing for dynamic exits
  - Can REPLACE exits without window of DELETE then ADD which leads to a time when there are either 0 or 2 active exits.
  - Can provide an 8-byte constant parameter to be passed to an exit
  - Exits can be differentiated by type: installation or used by program
- PROGxx parmlib processing for dynamic LNKLIST
  - Dynamically changing linklist can be a problem for running jobs
  - Can now delay close/free of old linklist for a number of seconds

# Program Management Enhancements



- PROGxx parmlib processing for dynamic LPA
  - Keyword to add all aliases on an LPA ADD
  - Keyword to update the SVC table entry if module is an SVC routine
    - *Cannot be used to add a new SVC, only replace exiting ones*
  - ADD from fully qualified HFS file name
  - LPA ADD statements in PROGxx load from PDSEs late in IPL
    - *Subsystems and applications can wait till LPA loading is complete*
- PROGxx parmlib defaults processing
  - Keyword to set defaults for other statements
  - For example: **DEFAULTS LPA ADDALIAS**
- PROGxx parmlib processing for SYSLIB
  - SYSLIB statement supports a VOLUME if data set is not cataloged in the master catalog
  - It's still important to catalog the data sets in a catalog used by LLA



**SHARE**


Technology • Connections • Results

# New Vary CU Command

- **Problem:**
  - Recent technologies, like HyperPAV and multiple subchannel sets, have created scenarios where devices attached to a logical control unit are no longer in a consecutive numerical range.
  - Vary commands specify individual or ranges of devices.
  - Nonconsecutive device numbers complicate command syntax.
- **Solution:**
  - Use control unit number as the point of control for the Vary command.
  - New variant of the VARY device and VARY PATH commands that will operate on all eligible devices attached to a logical control unit.
  - Authorization required to run V CU command
    - Control access to MVS.VARY.CU
    - Control access to MVS.VARYFORCE.CU when OFFLINE,FORCE is specified

```
V CU {(cunumber)}, {ONLINE[,UNCOND[,FORCE] | ,SHR | ,RESET]}
    {OFFLINE[,FORCE] }
    {AUTOSWITCH | AS [,ON | OFF] }
    {UNAVAILABLE | UNAVAIL }
    {AVAILABLE | AVAIL }
V CU {(cunumber, chpid)}, {ONLINE[,FORCE] }
    {OFFLINE[,UNCOND | ,FORCE]}
```

**SHARE**  
in Anaheim  
2011




**SHARE**

Technology • Connections • Results

# D M=DEV shows the CU number

```
IEE174I 09.18.14 DISPLAY M 825
DEVICE 1400 STATUS=ONLINE
CHP                85    95    90
ENTRY LINK ADDRESS 6B22 19    3C
DEST LINK ADDRESS  6B11 32    7D
PATH ONLINE        Y     Y     N
CHP PHYSICALLY ONLINE Y     Y     Y
PATH OPERATIONAL   Y     Y     N
MANAGED            N     N     N
CU NUMBER          1400 1400 1400
MAXIMUM MANAGED CHPID(S) ALLOWED:  0
DESTINATION CU LOGICAL ADDRESS = 04
SCP CU ND          = 002107.922.IBM.75.000000002471.0010
SCP TOKEN NED      = 002107.900.IBM.75.000000002471.0400
SCP DEVICE NED     = 002107.900.IBM.75.000000002471.0400
HYPERPAV ALIASES CONFIGURED = 192
FUNCTIONS ENABLED = MIDAW, ZHPF
```



**S H A R E**

Technology • Connections • Results

# D M=CU shows devices attached to a control unit

RESPONSE=S5A

IEE174I 09.08.54 DISPLAY M 564  
CONTROL UNIT 1400

CHP	85	95	90
ENTRY LINK ADDRESS	6B22	19	3C
DEST LINK ADDRESS	6B11	32	7D
CHP PHYSICALLY ONLINE	Y	Y	Y
PATH VALIDATED	Y	Y	N
MANAGED	N	N	N
ZHPF - CHPID	Y	Y	Y
ZHPF - CU INTERFACE	Y	Y	N

MAXIMUM MANAGED CHPID(S) ALLOWED = 0

DESTINATION CU LOGICAL ADDRESS = 04

CU ND = 002107.922.IBM.75.000000002471.0010

CU NED = 002107.922.IBM.75.000000002471.0400

TOKEN NED = 002107.900.IBM.75.000000002471.0400

FUNCTIONS ENABLED = ZHPF

DEFINED DEVICES

01400-0143F

DEFINED PAV ALIASES


11440-114FF

**SHARE**  
in Anaheim  
2011

# Auto-Reply for WTORs

- **Problem:**
  - Operators no longer closely monitor the system waiting to immediately reply to WTORs.
    - Customers have said it's not unusual for a WTOR to be outstanding for **half an hour**
    - Reply delays can affect all systems in a sysplex.
  - Operators often do not have authority, experience, or system understanding to make their own decision on what to reply for uncommon WTORs.
- **Solution:**
  - Auto-Reply allows a policy to be defined which specifies a reply value and a time delay for specific WTOR message IDs.
  - The system will automatically issue the reply from the policy if the WTOR has been outstanding longer than the time delay specified.
- **Policy Definition**
  - Default policy in parmlib member AUTOR00 (supplied by IBM)
    - Default policy will be used unless requested not to activate or another policy is specified
    - Customer are recommended not to modify AUTOR00
      - *Customer can add their own policy or override AUTOR00 policy*
      - *Vendor products can provide their own parmlib members*
  - The policy will be activated during IPL
    - New system parameter AUTOR= specified in IEASYSxx parmlib member
    - Activated before XCF is initialized
    - Installation can provide set of parmlib members to contain Auto-Reply policy or to request that Auto-Reply processing not be activated.

# Security Check Routing of CPF Commands



**SHARE**  
Technology • Connections • Results

- **Problem:**
  - Command Prefix Facility (CPF) supports the transporting of commands across the sysplex
  - No security checks to verify operator can use the prefix to transport the command
- **Solution**
  - Prefixed commands now subject to `MVS.ROUTE.CMD.sysname` resource profile
  - For compatibility, security check only performed if profile `MVS.CPF.ROUTE.CHECK` is defined in the `OPERCMDSDS` class
  - Installation can now control whether an operator can issue a CPF prefixed command that will be transported to another system.

# Less Disruptive SVC Dump Data Capture

- **Problem:**
  - SVC Dump capture time can be excessive in memory constrained environments:
    - When large amounts of data need to be paged-in from auxiliary storage for inclusion in the dump
    - When capturing large amounts of component SDUMP exit data
  - Capturing the data affects the page replacement algorithm
    - Data paged-in from auxiliary storage puts pressure on real memory availability
    - The data access for the dump looks like recently referenced and may force more important application data to be stolen to auxiliary storage
- **Solution:**
  - Batch page-in I/O operations during SDUMP capture phase to reduce I/O delay
  - Restore the reference state of data captured for the dump so it will not cause more important application data to be paged out
  - Certain components (e.g. GRS for SDATA GRSQ data, IOS) now use a more efficient capture method in their SDUMP exits



# Controlling Discretionary Time Slice




- **Problem:**
  - Forcing ready work off a CPU causes cache disruption and overhead.
    - Yielding to higher priority work is necessary
    - Rotating equal priority nondiscretionary work is also important since it keeps processor delay low.
    - Rotating among equal priority discretionary work may not be worth the overhead.
- **Solution:**
  - Allow the customer CPU to extend residency for CPU-intensive work with a discretionary goal before it must give up the CPU to other discretionary work.
    - Not all discretionary work but only work most likely to use the additional time on the CPU – i.e. “CPU-intensive” work.
    - Installation defines “CPU-intensive” using the CCCSIGUR=x parameter
    - Up to 254 additional timeslices before yielding to other discretional work
- **Benefit:**
  - The number of context switches occurring when dispatching multiple CPU-intensive jobs with a discretionary goal is decreased
  - When work isn't switched, cache misses are reduced so throughput can increase


# System Area above 2GB

- A new system area is created in the address space 64-bit map
- Memory objects allocated in the System Area start at location `x'8_00000000'`
- *An authorized program can issue `IARV64 REQUEST=GETSTOR, LOCALSYSAREA=YES` to indicate that the memory object should be allocated from the System Area above 2GB*
- In fork processing, during the 64-bit copy phase, memory objects that are allocated in the system area are not copied to the child space
  - This area is not checkpointed for Checkpoint/Restart.

64-Bit Address Space Memory Map

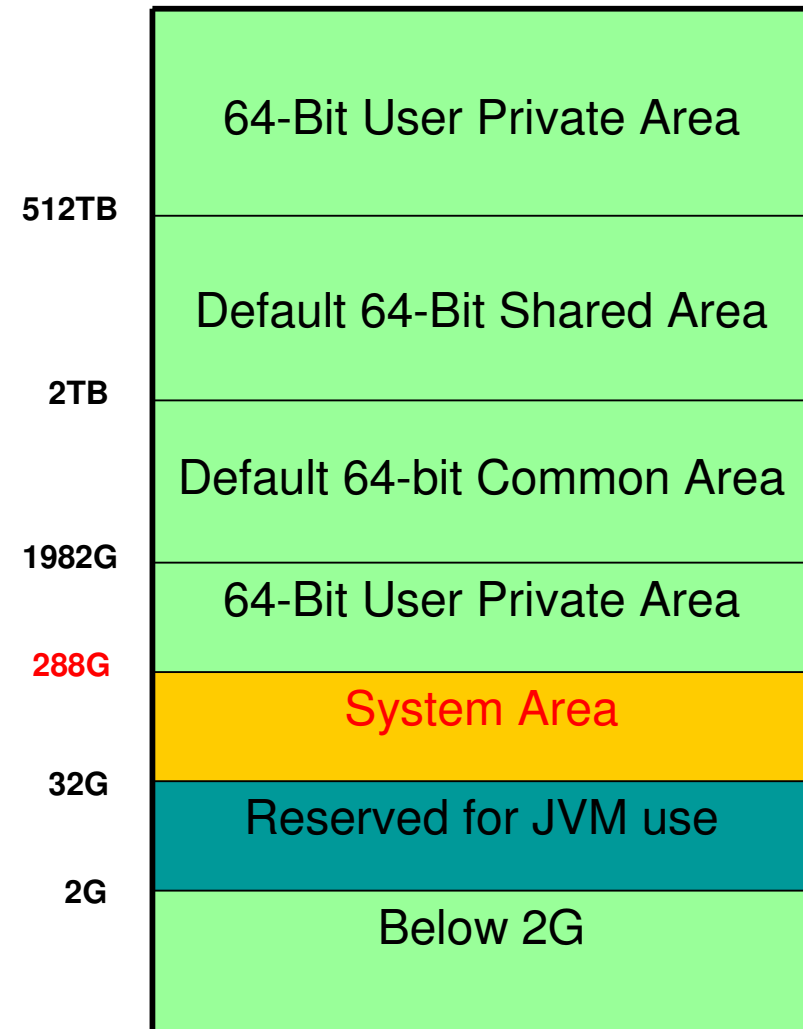

# Setting LE Parameters as non-overrideable



**SHARE**  
Technology • Connections • Results

- **Problem:**
  - The only method for marking run-time options as non-overrideable is at the installation-default level which requires installing SMP/E usermods.
  - Customers could not fully migrate customization to CEEPRMxx, which is strategic.
- **Solution:**
  - Allow the overrideable attributes (OVR and NONOVR) to be specified for run-time options in a CEEPRMxx parmlib member or with a SETCEE operator command.
- **Benefit:**
  - An installation can now specify the options for Language Environment without installing user modifications, thus eliminating a repetitive migration task.
  - System-level run-time options can be specified as nonoverrideable and applied dynamically.

# TSO/E multiple logons with JES2

- **Problem:**

- JES2 allows TSO/E users to logon on once per system in a sysplex, however TSO/E could not fully support it because of the SEND command
- If a message is issued on system A to a user on systems B and C, MVS SEND fails with IKJ572I and TSO/E SEND with IKJ55072I:

USER(S) IBMUSER NOT LOGGED ON OR TERMINAL DISCONNECTED, MESSAGE CANCELLED


- **Solution:**

- Now the message is sent to the first instance of a user that JESXCF finds

- **Prerequisites for installation**


- Update the active GRSRNLxx member to delete or comment out:  
/\* RNLDEF RNL(INCL) TYPE(GENERIC) \*/  
/\* QNAME(SYSIKJUA) \*/
- If you are using unique SYS1.UADS data sets you may need to add:  
RNLDEF RNL(EXCL) TYPE(SPECIFIC)  
QNAME(SYSDSN) RNAME(SYS1.UADS)

# TSO/E Password Special Character Support



**SHARE**  
Technology • Connections • Results

- TSO/E LOGON panel restricted eight character or less passwords to alphanumeric or national characters (a-z, A-Z, 0-9, @, #, \$)
  - Not all security products for z/OS impose the same limit
  - Some security protocols require additional special characters
- In z/OS R12, users can enter other special characters in passwords if the security products allow users and administrators to do
  - However, line mode logon is not affected, as with password phrases
- Before this change TSO/E users would see:  
**IKJ56464I You have entered unacceptable characters in the highlighted field(s).**  
**IKJ56465I Press PF1 or PF13 for help**
- After this change they could still see:  
**IKJ56414I NEW-PASSWORD IS INVALID FOR RACF**  
**IKJ56429A REENTER -**



**SHARE**  
Technology • Connections • Results

# Health Checks in Metal C


- **z/OS supports writing health checks in either assembler language or REXX.**
  - Assembler is not the easiest or most productive language
  - There are restrictions on what can be done in REXX
- **C is a language that many programmers know**
- **Metal C can be used to authorized code with limited run-time support**
  - METAL C does not require a language environment (LE)
  - METAL C generates very efficient code, essentially allowing to “write an assembler program in C”
  - METAL C allows to embed assembler statements and in particular assembler (macro) service invocations
  - METAL C supports all the core functions of “regular” C
- C header files provided in `SYS1.SIEAHDR.H`
- Code samples are shipped in `/usr/lpp/bcp/samples`

**SHARE**  
in Anaheim  
2011

# Health Checker no longer requires uid(0) to use USS



- In order to successfully run health checks which use z/OS Unix System Services (USS), Health Checker must have a user profile with
  - OMVS segment and
  - USS super user authority
- Uid(0) user profiles are closely watched by auditors and might require extra explaining
- In z/OS V1R12 you can associate the Health Checker address space with a user profile which has
  - READ access to the BPX.SUPERUSER resource in the FACILITY class, and
  - A non-zero uid



**S H A R E**  
Technology • Connections • Results

# Standalone Dump ASID Prioritization

- ASIDs 1 – 4 are always dumped for minimal address spaces
- Prior to R12, the “summary” address spaces are hardcoded  
Address spaces like **ANTMAIN, CONSOLE, XCFAS, IOSAS, SMXC, WLW, CATALOG, GRS, SMF, and ALLOCAS**
- R12 changes the default summary address space list to:  
**ALLOCAS, ANTAS000, ANTMAIN, CATALOG, CONSOLE, DEVMAN  
DUMPSRV, GRS, IEFSCHAS, IOSAS, IXGLOGR, JESXCF, JES2, JES3,  
OMVS, SMSPDSE, SMSPDSE1, SMSVSAM, WLM, SMF, SMFXC, XCFAS**
- A new keyword **ADDSUMM** is provided to request additional address spaces


## **SADMP captures storage in following order:**

1. Page frame table and its related structures
2. Real storage associated with the minimal address spaces
3. Real storage associated with the summary address spaces
4. Real storage associated with the swapped-in address spaces
5. In-use real storage
6. Page-out storage of minimal address spaces
7. Page-out storage of summary address spaces
8. Page-out storage of swapped-in address spaces
9. Storage of swapped-out address spaces
10. Available real storage

**SHARE**  
in Anaheim  
2011



# z/OSMF WLM Policy Editor



**SHARE**  
Technology • Connections • Results


- **WLM Policy Editor is available on the z/OS Management Facility**
  - All the same function as in the Web-download tool and many new features
  - Direct access to the WLM Couple Data Set to install/extract service definitions. No need to FTP WLM policy files!
  - Activation of service policies and monitoring of the WLM status in the sysplex
  - Repository to store service definitions as starting point for edit, print, install operations

The screenshot displays the IBM z/OS Management Facility Workload Management interface. The main content area shows a table of Service Definitions with columns for Name, Description, Activity, Sysplex, Messages, Last Modified (GMT), and Modified By. A context menu is open over the 'F150E00' entry, showing options like 'Modify Service Definition', 'View Service Definition', 'View Messages', 'View Policy', 'Print Preview', 'Install and Activate...', 'Copy...', 'Delete', and 'Export'. The interface includes a navigation sidebar on the left and a top navigation bar with tabs for Overview, Service Definitions, and Modify WLMPOU03.

Name	Description	Activity	Sysplex	Messages	Last Modified (GMT)	Modified By
MP				Information	11/03/2010 4:01:38 PM	vmag
prodpl	service definition of production			Information	11/26/2009 10:42:09 PM	vmag
HT_TEST				Information	11/03/2010 1:15:28 AM	vmag
RTCGTS	CGG copy 8		WLMPLDCK		02/21/2009 8:25:10 PM	DMAI
Sample0	Sample WLM Service Definition 00				03/24/2007 8:48:39 AM	TRJATT
Sample0	Sample WLM Service Definition 01				02/14/2009 11:47:31 AM	Frank2
Sample0	Sample WLM Service Definition 04			Warning	12/3/2009 1:54:32 PM	vmag
SD				Error	11/03/2010 3:13:53 PM	vmag
F150E00	unknown SAP DSC			Information	12/15/2007 8:11:48 PM	PS60551
TRAT10				Information	11/03/2010 12:43:28 PM	vmag
Test PK1				Error	10/9/2009 11:40:36 AM	SI0011
TRAT00				Error	10/30/2008 6:47:57 PM	vmag
WLM_Desc	WLM Description Test			Error	11/03/2010 3:00:00 PM	vmag
WLM001	Service Definition Preloader				09/26/2008 11:24:08 AM	SI0011
WLM020					10/26/2008 11:24:08 AM	SI0011
WLM030					11/21/2008 10:48:49 PM	vmag
WLM040					10/30/2008 11:24:08 AM	SI0011
WLM101					09/26/2008 11:24:08 AM	SI0011

**SHARE**  
in Anaheim  
2011


# z/OSMF WLM Policy Editor



**SHARE**

Technology • Connections • Results

- **Simplified creation, modification and review of service definitions**
  - Policy elements are presented in tables
  - Tables can be filtered and sorted
  - Direct editing of policy elements within tables
  - Best-practice hints are displayed automatically while specifying policy elements
  - Several service definitions can be opened simultaneously
  - Cut, Copy, Paste of policy elements between service definitions

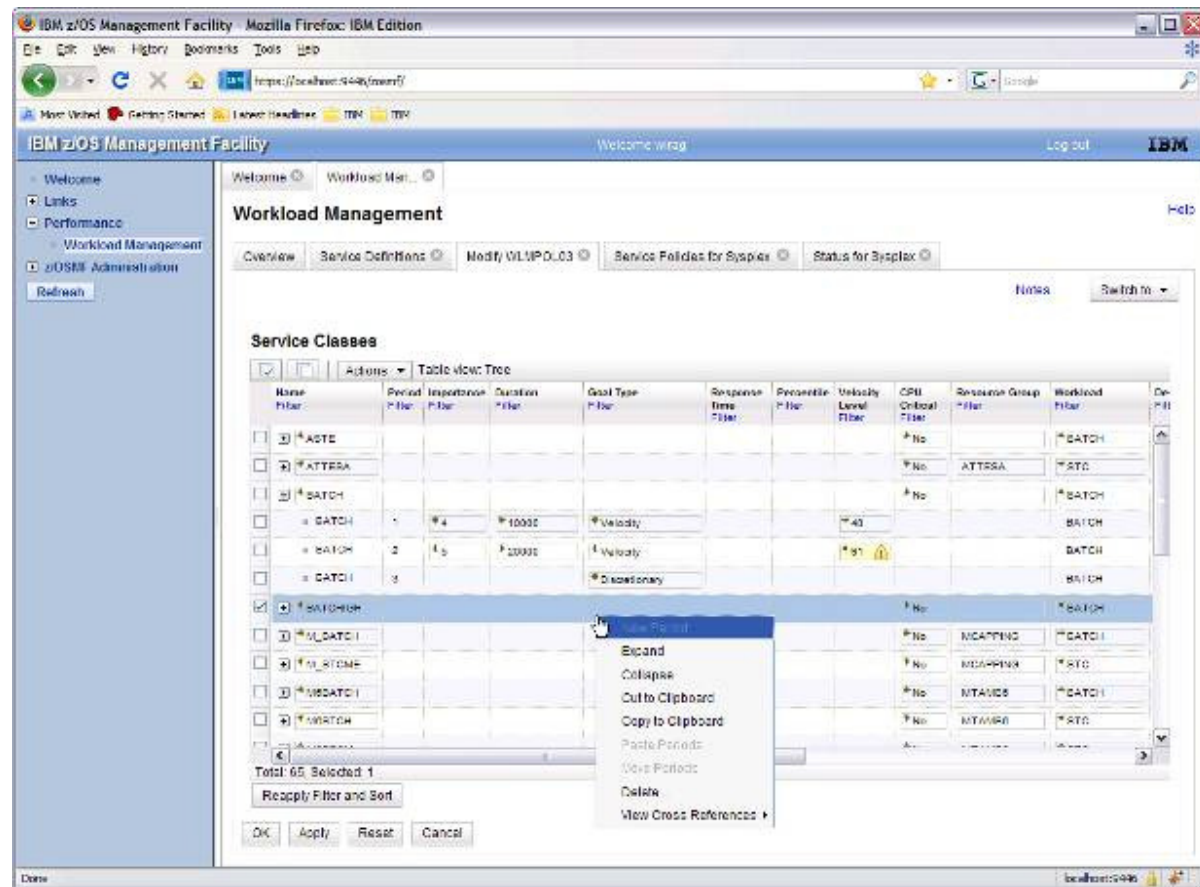

# Elimination of Pre-built Unicode Image



- In z/OS V1R6, a pre-built image is provided to facilitate customer exploitation of DB2
  - The pre-built image is a binary file containing all the conversion tables required by DB2. It's automatically loaded at IPL time if the required conditions are met.
- In z/OS V1R7, Unicode Services added the support for “Unicode On Demand”.
  - With “Unicode On Demand”, conversion tables are loaded dynamically, if not already in storage, without requiring an IPL or disrupting the caller's request.
- “Unicode On Demand” eliminates the need to have a pre-loaded image. It is eliminated in z/OS R12