



TCP/IP Troubleshooting Tips & Tools

Gordon Webber
William Data Systems

August 2011

Gordon.Webber@willidata.com

- Know Your Network
- Action Plans / Problem Determination
- Tools – General Usage
- Understanding the Common Tools
(ping, traceroute, netstat, nslookup, ...)
- Problem Diagnosis Tips

Know Your Network! . . .



- In order to manage any network successfully, you must be aware of the topology.
- Before any successful, and timely, problem resolution can be attempted, a (current !) network diagram is **essential**.
- The diagram (and associated documentation) should indicate all nodes and all possible paths, and detail the subnets, addresses and software (especially versions) available at each node.
- Only then is it possible to create an appropriate **action plan**...

Action Plans



- **Where to Start?** - First, *identify the problem*. This will determine the right tools to use, and the right place to start testing from (**! "Top-down" or "Bottom-up" !**). Progressive testing may be needed to isolate the problem area.

Misinformation Anecdote

- Network problems usually fall into two or three categories:-
 - **No connection can be made.**
 - **Connections can be made, but are unstable, OR , not all functions operate.**
 - **Connections are stable but performance is poor.**



Connectivity issues can be caused by:-


- Application errors
- Failed network connections
- Bad configuration/changes
- Hardware failures
- Failed bind
- Power failures
- Security restrictions

Performance issues can be caused by:-

- Insufficient bandwidth
- Bottlenecks
- Priorities
- Retries
- Broadcasts
- Congestion
- Routing
- Fragmentation
- Application errors
- Switch faults

Action Plans

1. **Investigate (*ALL*) error messages** – these may indicate the nature and location of the failure [**e.g.**, “ttl” expired, no path available, packet size too large (“nofragment” is on)].
!! Syslog !!
2. **Classify the error** – ask what works and what doesn’t, and for whom

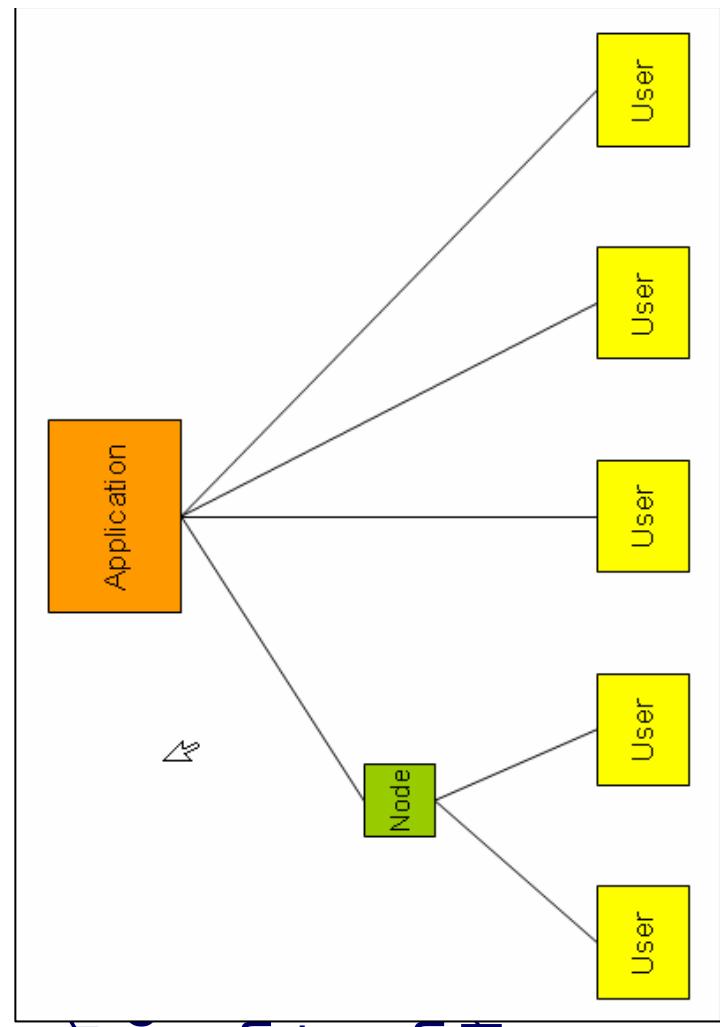

- Problems affecting one or more physical (e.g. chassis) components to be the network path.
- Problems affecting more than one node in the network path.
- Problems affecting more than one network path between two applications.



3. Test connectivity (**end-to-end**) – using Ping/Traceroute.

Be careful to ensure that the packets take the same path as the problem connection (i.e. ensure correct source interface address – you may need to use an “extended” PING).

- If PING fails, note the location and investigate there.
- If PING succeeds (note that this is ICMP, the connection probably uses TCP, so this may NOT be a conclusive test), try with a TCP PING if available
- If PING succeeds try again with larger packets, if appropriate.



For Example: Problem reported as ...

"end-user cannot connect to application"

- Starting at the end-user system ensure local physical connections are good, then check the next layer, such as local switch ports, vlans, routers, and even firewalls.
- Then, test each "hop" by progressive steps across the network.
- Then ensure that the system running the required application is connected at the network level ("ping" from that system outbound via the interface in question).

If all these results are good, then the issue is probably with the application and not a network problem!

Disclaimer:

The fact that some tools are mentioned in this presentation while other tools are not, in no way implies recommendation of the tools mentioned, nor condemnation of those tools not mentioned.

The purpose of this presentation is simply to make attendees aware that such tools exist, and the attendees should make up their own mind as to the suitability of any tool used on their own system.

“Common” Tools



“PING”

- proves that connectivity exists
- discovers the network path (also “traceroute”)

“TRACEROUTE”

“NETSTAT”

- to locate connection information

<table border="0"> <tr> <td>ALL</td><td>- All connections to a stack</td></tr> <tr> <td>ALLConn</td><td>- TCP/IP connections</td></tr> <tr> <td>ARP</td><td>- Query ARP table or entry information</td></tr> <tr> <td>CONFIG</td><td>- Configuration data</td></tr> <tr> <td>Conn</td><td>- Active TCP/IP connections (Default)</td></tr> <tr> <td>DDevLinks</td><td>- Devices and links</td></tr> <tr> <td>Gate</td><td>- Current known gateways</td></tr> <tr> <td>Home</td><td>- Home address list</td></tr> <tr> <td>PORTList</td><td>- Display port reservation list</td></tr> <tr> <td>ROUTE</td><td>- Display routing information</td></tr> <tr> <td>SOCKETS</td><td>- Socket interface users and sockets</td></tr> <tr> <td>STATS</td><td>- TCP/IP statistics</td></tr> <tr> <td>TCP</td><td>- Displays detailed info about the stack</td></tr> <tr> <td>TELnet</td><td>- Telnet connection information</td></tr> </table>	ALL	- All connections to a stack	ALLConn	- TCP/IP connections	ARP	- Query ARP table or entry information	CONFIG	- Configuration data	Conn	- Active TCP/IP connections (Default)	DDevLinks	- Devices and links	Gate	- Current known gateways	Home	- Home address list	PORTList	- Display port reservation list	ROUTE	- Display routing information	SOCKETS	- Socket interface users and sockets	STATS	- TCP/IP statistics	TCP	- Displays detailed info about the stack	TELnet	- Telnet connection information	<p>z/os command format:</p> <hr/> <pre>NETSTAT < Option Command > < Target > < Output > < Select ></pre> <p>E.g. :</p> <pre>TSO NETSTAT CONN (PORT 25 TSO NETSTAT TCP TCPIP</pre>	<p>Note that “NETSTAT(REPORT” will collect the output to a dataset; for ease of reading or input to a REXX?.....</p>
ALL	- All connections to a stack																													
ALLConn	- TCP/IP connections																													
ARP	- Query ARP table or entry information																													
CONFIG	- Configuration data																													
Conn	- Active TCP/IP connections (Default)																													
DDevLinks	- Devices and links																													
Gate	- Current known gateways																													
Home	- Home address list																													
PORTList	- Display port reservation list																													
ROUTE	- Display routing information																													
SOCKETS	- Socket interface users and sockets																													
STATS	- TCP/IP statistics																													
TCP	- Displays detailed info about the stack																													
TELnet	- Telnet connection information																													

Other Tools

"Nslookup" - test domain name resolution (& "DIG")

"Snmp"

- where SNMP is supported, there are many tools available to extract further information (MIB data), once the problem area has been located (e.g. Monitors, such as "**Implplex**" for z/OS ; "**iReasoning**" elsewhere)

"TIVOLI"

- IBM network tools (Monitor and trace facilities)

"Ctrace"

- z/OS trace tool

"EXIGENCE" - WDS trace "expert" system

(now ZTS ! - "ZEN Trace & Solve")



Other Tools



- “**TPing**” - (“TurboPing”) “PING” using TCP packets
- “**Tcpdump**” - (also Windump & SSLdump) is a packet sniffer found on many (most?) open platforms.
- “**Ethereal**” - open system packet analyser (& “**Wireshark**”)
- “**Pchar**” - is a reimplementation of Van Jacobson's (“Mr Traceroute”) **pchar** utility which analyses the individual hops of a path.
- “**Netcat**” - Netcat is a utility which reads and writes data across network connections. It is a network debugging and exploration tool. (+ *port-scanner* !)

* New *
Ncat from Nmap
- “**VisualRoute**” - path checker and graphical display
- “**NeoTrace**” - (McAfee) Internet locator: enhanced traceroute
....etc

Tools in Detail



“Ping”

- “Packet INternetwork Groper”, is usually ICMP-based, which works if ICMP is allowed to pass. If not permitted, then an application-based ping can be used [e.g. “**APING**” (UDP) or “TPing” (TCP)].

Ping tests by sending out **ICMP Request** packets, and receiving **ICMP Replies**, therefore verifying up to (ISO) **layer 3** . . .

C:\>ping 66.249.85.99 (www.google.co.uk ----- use IP address or URL)
Pinging 66.249.85.99 with 32 bytes of data:

```
Reply from 66.249.85.99: bytes=32 time=22ms TTL=244
Reply from 66.249.85.99: bytes=32 time=22ms TTL=244
Reply from 66.249.85.99: bytes=32 time=42ms TTL=244
Reply from 66.249.85.99: bytes=32 time=22ms TTL=244
```

Ping statistics for 66.249.85.99: Packets: Sent=4, Recvd=4, Lost=0 (0% loss),
Approx. round trip times in milliseconds: Min=22ms, Max=42ms, Ave=27ms



ISO 7-Layer Network Model

- Layer 1: Physical - defines the real hardware.
- Layer 2: Data Link - defines the format of data (frame/packet). (**MAC**)
- Layer 3:** Network - responsible for routing datagrams. (**IP**)
- Layer 4: Transport - manages data between network and user. **TCP/UDP**)
- Layer 5: Session - defines the format of the data sent.
- Layer 6: Presentation - converts to/from local representation of data.
- Layer 7: Application - provides network services to the end-users.

TCP/IP 4-Layer (Unix/DoD) Network Model

- Layer 1: Link - defines the network hardware and device drivers.
- Layer 2:** Network - addressing, routing, delivery. (**IP / ICMP**) (**ARP**)
- Layer 3: Transport - communication; end-to-end integrity. (**TCP / UDP**)
- Layer 4: Application - user applications. (**DNS, arp, telnet, smtp, http, ftp, traceroute....**)

ICMP Types/Codes

ICMP Types:

0	Echo Reply
3	Destination Unreachable
4	Source Quench
5	Redirect
6	Alternate Host Address
8	Echo
9	Router Advertisement
10	Router Solicitation
11	Time Exceeded
12	Parameter Problem
13	Timestamp
14	Timestamp Reply
15	Information Request
16	Information Reply
17	Address Mask Request
18	Address Mask Reply
30	Traceroute
31	Datagram Conversion Error
32	Mobile Host Redirect
33	IPv6 Where-Are-You
34	IPv6 I-Am-Here
35	Mobile Registration Request
36	Mobile Registration Reply
37	Domain Name Request
38	Domain Name Reply

ICMP Codes:

3	Destination Unreachable
0	Net Unreachable
1	Host Unreachable
2	Protocol Unreachable
3	Port Unreachable
4	Fragmentation Needed and DF Set
5	Source Route Failed
6	Destination Network Unknown
7	Destination Host Unknown
8	Source Host Isolated
9	Communication with Dest Network Prohibited
10	Communication with Dest Host Prohibited
11	Dest Network Unreachable for Type of Service
12	Dest Host Unreachable for Type of Service
13	Communication Administratively Prohibited
14	Host Precedence Violation
15	Precedence cutoff in effect
11	Time Exceeded
0	Time to Live exceeded in Transit
1	Fragment Reassembly Time Exceeded

Ref: "www.iana.org/assignments icmp-parameters"

Tools in Detail



PING (Windows)

Usage: **ping** [-t] [-a] [-n count] [-l size] [-f] [-i TTL] [-v TOS]
[-r count] [-s count] [[-j host-list] | [-k host-list]]
[-w timeout] target_name

Options:

- t Ping the specified host until stopped.
To see statistics and continue - type Control-Break;
To stop - type Control-C.
- a Resolve addresses to hostnames.
- n count Number of echo requests to send.
- l size Send buffer size.
- f Set Don't Fragment flag in packet.
- I TTL Time To Live.
- v TOS Type Of Service.
- r count Record route for count hops.
- s count Timestamp for count hops.
- j host-list Loose source route along host-list.
- k host-list Strict source route along host-list.
- w timeout Timeout in milliseconds to wait for each reply.

Tools in Detail

PING

```
C:\>ping 66.249.85.55 ← non-existent addresses  
Pinging 66.249.85.55 with 32 bytes of data:
```

Request timed out.
Request timed out.
Request timed out.
Request timed out.

(or “Destination unreachable ?)
(if a return path is available)

Ping statistics for 66.249.85.55: Packets: sent=4, Recvd=0, Lost=4 (100% loss),

Drawbacks:

- Extra traffic on the network.
- “Time To Live” (TTL) set to a high value to ensure penetration.
- Network devices **may not allow** Ping/ICMP and may drop its priority.
- May not take the same path as user traffic; delay (latency) reported **may not** be representative for the application(s).
- Low feedback on fault and location.



TRACEROUTE (Windows)

Usage: **traceroute** [-d] [-h maximum_hops] [-j host-list]
[-w timeout] target_name

Options:

- d **Do not resolve addresses to hostnames.**
- h maximum_hops **Maximum number of hops to search for target.**
- j host-list **Loose source route along host-list.**
- w timeout **Wait timeout milliseconds for each reply.**

- Also uses ICMP ! (although some platforms use UDP)
- Good for spotting “loops” in the routing
- “**Time To Live**” (**TTL***) is incremented for each positive response.
- Each “hop” in the path is identified (Names may be resolved!).
- “Per hop” round-trip delays can be identified.
- **Drawbacks** are similar to those of “Ping” .

(* = **anti-looping function of TCP/IP**)

Tools in Detail

TRACEROUTEC:\>tracert 66.249.85.55 (www.google.co.uk ----- use IP address or URL)

Tracing route to 66.249.85.55 over a maximum of 30 hops

```
1 1 ms 1 ms 1 ms 81.144.212.33
2 7 ms 6 ms 6 ms 62.7.96.41
3 6 ms 6 ms 6 ms core2-gig2-1.kingston.ukcore.bt.net [194.72.3.2]
4 7 ms 7 ms 7 ms core2-pos7-3.ealing.ukcore.bt.net [62.6.201.42]
5 7 ms 7 ms 7 ms core2-pos10-0.redbus.ukcore.bt.net [194.74.65.202]
6 8 ms 7 ms 7 ms 194.74.65.38
7 7 ms 7 ms 7 ms 72.14.238.244
8 16 ms 16 ms 16 ms 216.239.43.91
9 22 ms 22 ms 22 ms 72.14.232.209
10 * * * Request timed out.
11 * * * Request timed out.
12 etc,etc . . . . .
```

TRACEROUTE should be run in BOTH directions!

Look for unsuitable (long) routes and high latency



Tools in Detail

TRACEROUTE

Some platforms give status indicators...

!H - Host unreachable. (Destination Net unreachable) The router has no route to the target system.

!N - Network unreachable.

!P - Protocol unreachable.

!S - Source route failed. A router is blocking source-routed packets.

!F - Fragmentation needed. (Check the MTU configuration at the router).

!X - Communication administratively prohibited. Traceroute blocked!

TRACEROUTE can be enhanced by visualization, as is often seen in graphical traceroute tools : **such as . . .**




VisualRoute - 1

Report for www.google.co.uk [66.249.85.99]


Analysis

This trace was started on 08-Jan-2007 10:28:48. The host 'www.google.co.uk' (known as 'f-in-199.google.com') has been found, and is reachable in 10 hops. Also, it responded to HTTP requests on port 80 (it is running server GWS/2.1, which responded in 431ms). The TTL value of packets received from it is 246. In general this route offers a good throughput, with hops responding on average within 11ms. The DNS lookup was completed almost instantaneously (less than 2ms - this may be the result of caching).

Map

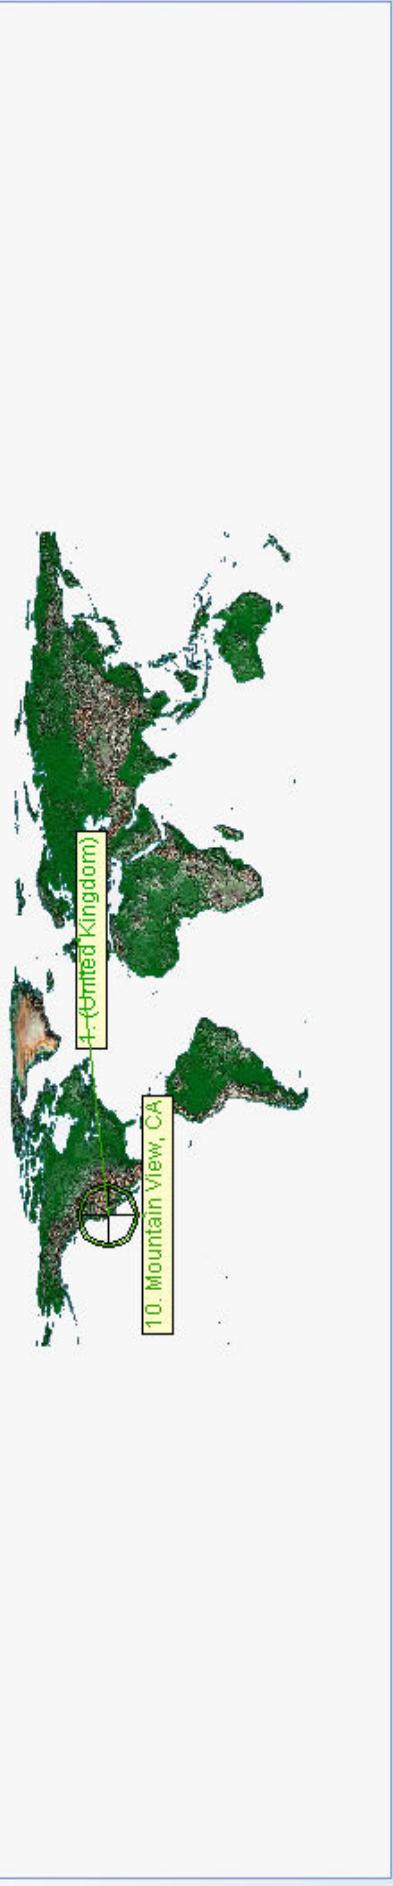


Route Graph

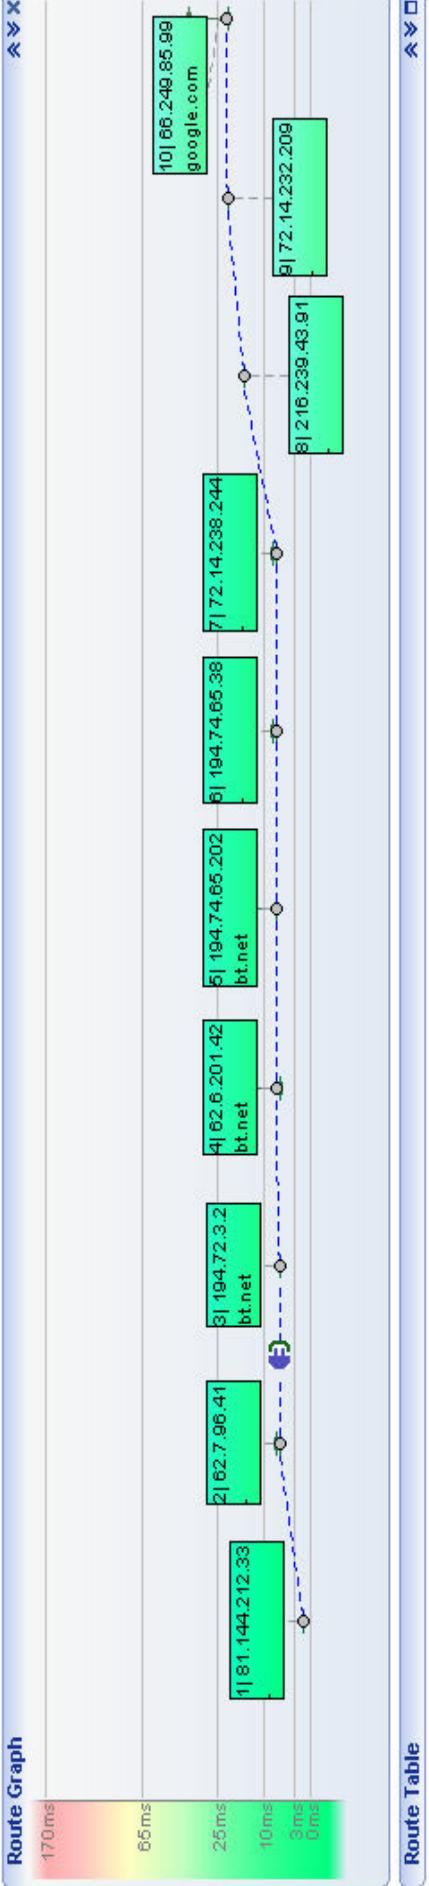

Route Table

TraceRoute Tools

VisualRoute - 2


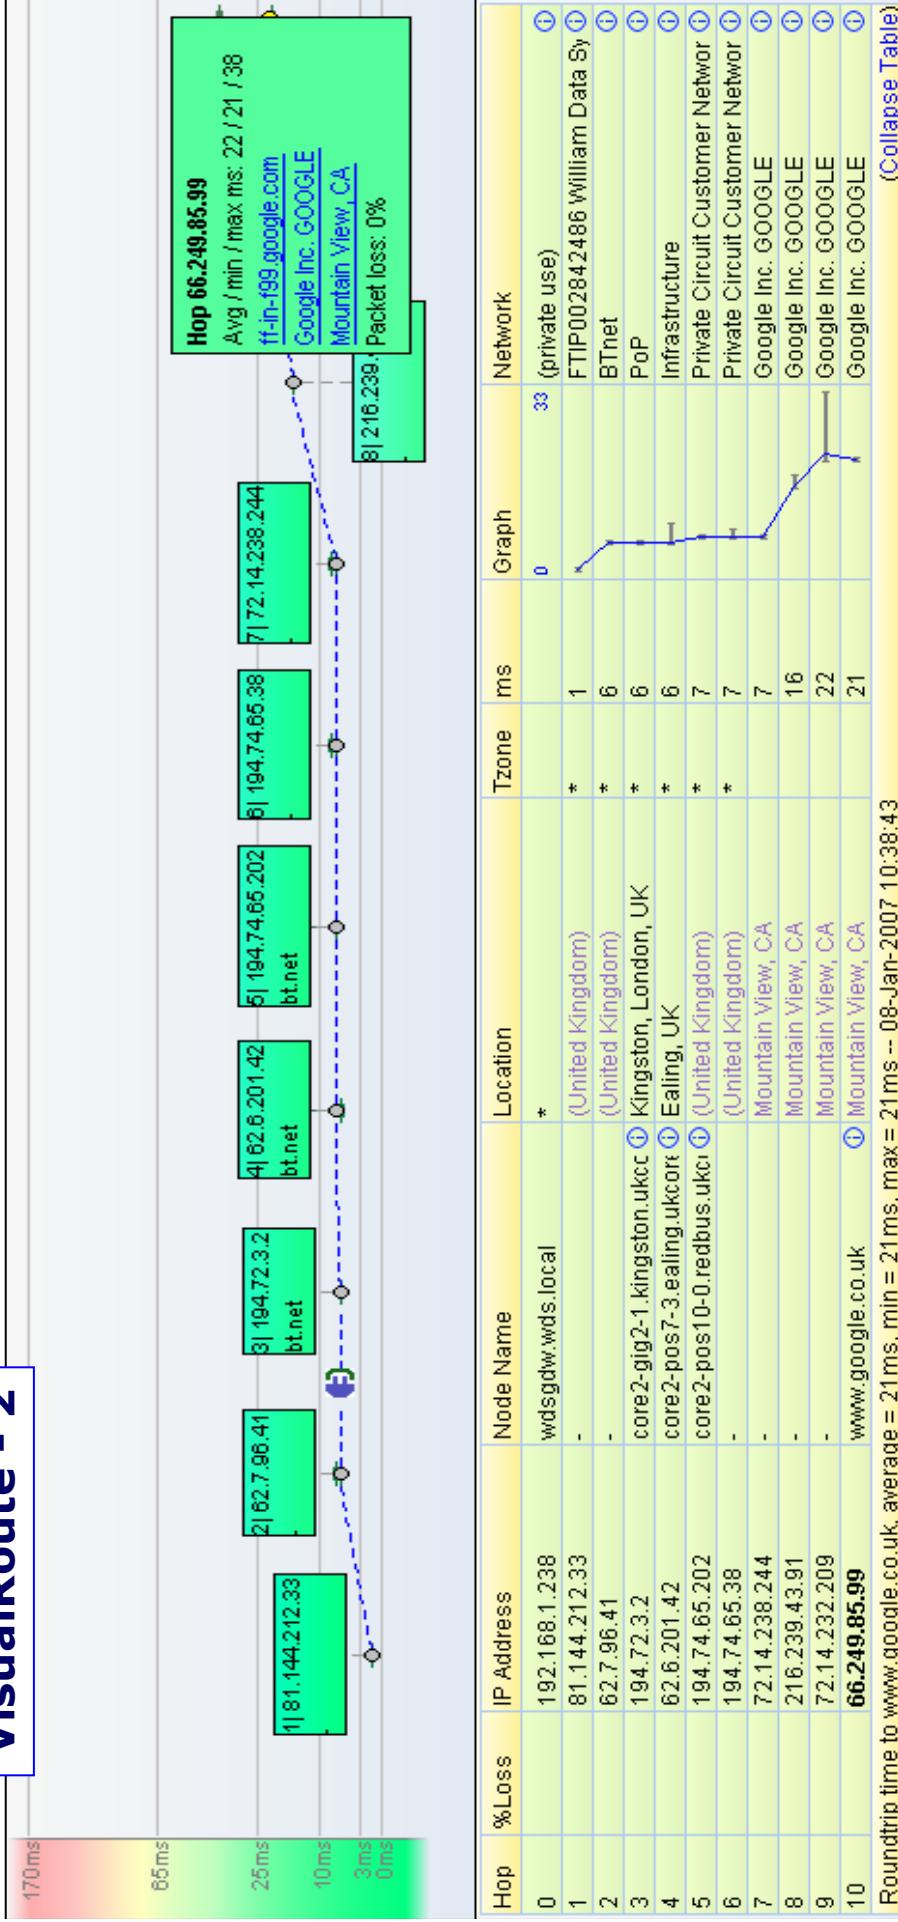


Learn more at:

<http://www.visualroute.com>

PingPlotter

Target Name: www.google.co.uk
 IP: **66.249.85.99**

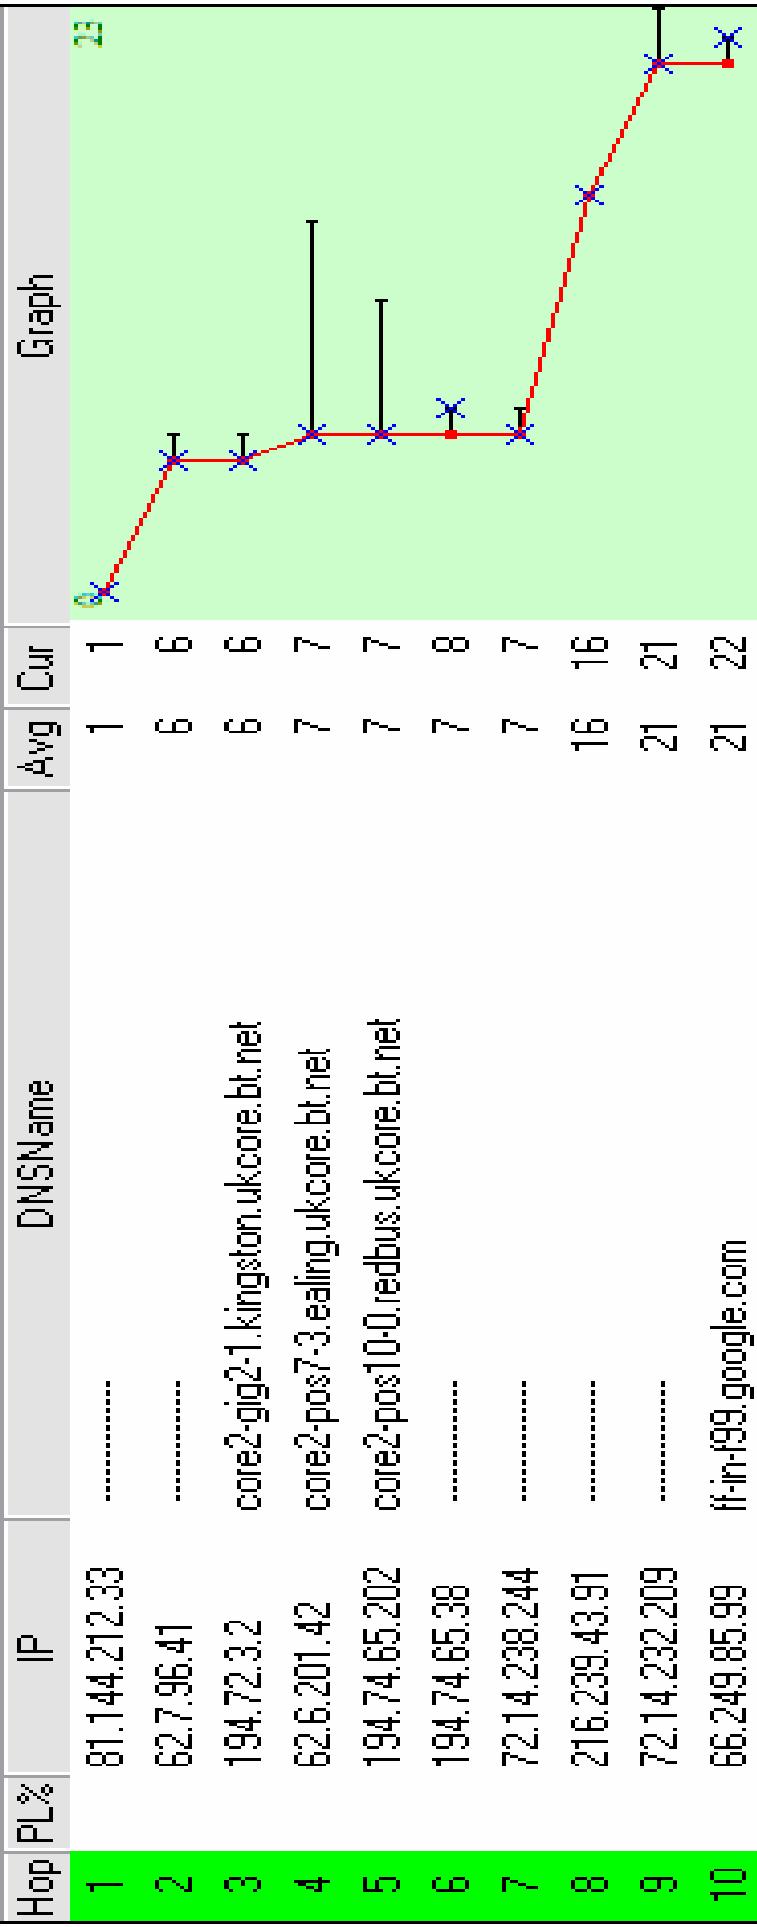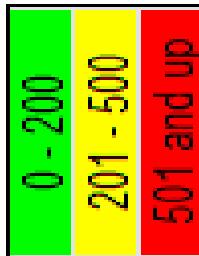

Round Trip:

21 22

Data and image generated by Ping Plotter Freeware [<http://www.pingplotter.com>]



TRACEROUTE – Alternatives

Where the target system is external to the local network, and especially where routing is not available to/from the local network, there are several sites around the World that offer the ability to run “Ping” and “Traceroute” to be instigated by remote control from their web site.

Basically, this is a “proxy” service ; the remote site issuing the test on your behalf.

This is suitable for determining the general availability of the target system (i.e. from anywhere on the Internet), but does not test specific routes.

“**www.samspade.org**” used to be an excellent example of this type of service, but is not currently available in its previous form.

Further directions to such services can be found at :-

“**www.traceroute.org**”

Tools in Detail

NETSTAT(z/OS)

NETSTAT < Option | Command > < Target >
< Output > < (Select >

TSO NETSTAT CONN
TSO NETSTAT DEV
TSO NETSTAT TCP TCPIP

Also "**onetstat**" ...

Can be issued from either **TSO** or **USS** ; the results are the same.

NB. Netstat options will vary depending upon the platform!

Note the following examples from z/OS and Windows. . .

Tools in Detail

NETSTAT(z/OS) – "DEV"

DevName: LCS1 **DevType:** LCS **DevNum:** 0E20
DevStatus: Ready **LnkName:** ETH1 **LnkStatus:** Ready
NetNum: 3 **Quesize:** 0
IpBroadcastCapability: Yes
MacAddress: 000255305115

NETSTAT(z/OS) – "SOCK"

DestAddr:	0.0.0.0	MVS TCP/IP NETSTAT CS V1R5	TCPPIP Name: TCPPIP
Packet Trace Setting:		Name: APIASHB Subtask: 007E1048	
Protocol:	253	Type: Dgram Status: UDP	Conn: 00001A1A
SrcPort:	*	BoundTo: 192.168.1.156. .12004	
IpAddress:	*	ConnTo: * . . *	
Multicast Specific:		Type: Stream Status: Listen	Conn: 00001A19
Multicast Capability:	Y	BoundTo: 192.168.1.156. .12004	
Group		ConnTo: 0.0.0.0 . . 0	
RefCr		Name: APIASHB Subtask: 007E12D8	
-----	-----	Type: Dgram Status: UDP	Conn: 00001A18
224.0.0.1	00000	BoundTo: 192.168.1.156. .12000	
Link Statistics:		ConnTo: * . . *	
BytesIn		Type: Stream Status: Listen	Conn: 00001A17
Inbound Packets		BoundTo: 192.168.1.156. .12000	
Inbound Packets In Error		ConnTo: 0.0.0.0 . . 0	
Inbound Packets Discard			
Inbound Packets With No			



Tools in Detail

NETSTAT (Windows)

Usage: **netstat [-a] [-b] [-e] [-n] [-o] [-p proto] [-r] [-s] [-v] [interval]**

- a Displays all connections and listening ports.
- n Displays addresses and port numbers in numerical form.
- r Displays the routing table.
- . . .etc

C:\>netstat -a

Active Connections		
Proto	Local Address	Foreign Address
TCP	wdsdgw: epmap	0.0.0.0:0
TCP	wdsdgw: microsoft-ds	0.0.0.0:0
TCP	wdsdgw: 1028	0.0.0.0:0
TCP	wdsdgw: 1241	0.0.0.0:0
TCP	wdsdgw: 10110	0.0.0.0:0
UDP	wdsdgw: microsoft-ds	*:*
UDP	wdsdgw: isakmp	*:*
UDP	wdsdgw: 1033	*:*
UDP	wdsdgw: 4500	*:*
UDP	wdsdgw: ntp	*:*
UDP	wdsdgw: 1900	*:*

Tools in Detail

DNS

In general, it is quite common to seek an IP target using a URL (which acts rather like a PATH name).

This entails sending the URL to a "Domain Name Server" (or "Resolver") in z/OS terms) to have the name translated (i.e. a "table lookup") into an IP address (this may occur locally by use of the "HOSTS file from Windows :- (C:\WINDOWS\System32\drivers\etc)

The IP address returned is then used to

```
127.0.0.1      localhost  
192.168.1.45   lizzie  
192.168.1.45   wds.local  
192.168.1.45   wds  
192.168.1.43   wdsnfs
```

This process may also be performed in reverse; i.e. the DNS server can translate an IP address into a URL !

The use of a URL means that remote services can be failed-over, relocated or rebuilt without the users needing to know!

Tools in Detail

DNS

The global Domain Name System is a hierarchy of servers/services spread across the Internet. At its core is a set of servers that manage the base domains; such as "**com**", "**edu**", "**gov**" ...etc

When a name is "looked up" it happens from right to left - *recursively*.

Take www.google.co.uk . . .

- . First the server is located that controls the "**uk**" domain (there is an implied "root" service where all top-level servers are known).
- . This will indicate the "**co.uk**" server ; which in turn will indicate the "**google.co.uk**" server.
- . The "**google.co.uk**" server will have IP addresses (***an "A" record*** for web ("**www**") and mail services (note: "www" is not the only canonical form used!)

NAMED.CONF

- lists the "zones" (eg. "google.co.uk")

ZONE FILES

- hold the IP addresses

NB. Zone information changed at the bottom of a "layer" is propagated upwards by "Zone Transfer" at preset times.

Tools in Detail

NSLOOKUP (Windows)

Usage: **nslookup** **NAME** , or , **NAME1 NAME2** ←(cf z/OS "Resolver")
or **command**

set option

all	[no]debug	[no]d2
[no]recurse	[no]search	[no]vc
srchlist=N1[/N2/. . ./N6]	root=NAME	retry=x
timeout=x	querytype=x	class=x
[no]msxfr	ixfrver=x	

Server NAME

Exit

"Lookup" failure will cause connectivity failure, and symptoms can be mistaken for a routing problem!
- - -

z/OS often acts as a relay, passing the requests on to a network DNS server.

Tools in Detail

C:\>nslookup (Windows)

```
> set debug
> www.google.co.uk
Server: my.router
Address: 192.168.27.1
----- (debug information)
```

Got answer:

HEADER:

```
opcode = QUERY, id = 3, rcode = NOERROR
header flags: response, want recursion, recursion avail.
questions = 1, answers = 1, authority records = 0, additional = 0
```

QUESTIONS:

www.google.co.uk.willdata.com, type = A, class = IN

ANSWERS:

```
-> www.google.co.uk.willdata.com
    internet address = 212.69.199.183
    ttl = 60 (1 min)
```

----- Non-authoritative answer:
Name: www.google.co.uk.willdata.com
Address: 212.69.199.183

----- (Retrieved from a cache!)

Tools in Detail

DIG

Domain Internet Groper: A tool for system administrators; it issues DNS queries and formats/interprets the answers.... Quite popular (*allegedly!*) with hackers...

Usage: **dig** {@global-server} [domain] {q-type} {q-class} {q-opt}
{global-d-opt} host {@local-server} {local-d-opt}
[host {@local-server} {local-d-opt} [...]]

```
dig @lizzie www.google.co.uk any
; <>> Dig 9.3.1 <>> @lizzie www.google.co.uk any
; (1 server found) ; global options: printcmd ; Got answer:
; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 16774
; flags: qr rd ra; QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 0
; QUESTION SECTION:
; www.google.co.uk.          IN      ANY
; ANSWER SECTION:
www.google.co.uk. 86399 IN CNAME www.google.com.
; Query time: 63 msec
; SERVER: 192.168.1.45#53(192.168.1.45)
; WHEN: Mon Feb 5 14:11:43 2007
; MSG SIZE rcvd: 62
... . . . >
```



Tools in Detail

DIG

>

dig @lizzie www.google.com any

```
; <>> Dig 9.3.1 <>> @lizzie www.google.com any
; (1 server found) ; global options: printcmd ; Got answer:
; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 60773
; flags: qr rd ra; QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 3

; ; QUESTION SECTION:
; www.google.com.          IN      ANY

; ; ANSWER SECTION:
www.google.com.        86400   IN      CNAME    www.1.google.com.

; ; ADDITIONAL SECTION:
www.1.google.com.       149     IN      A        66.249.93.104
www.1.google.com.       149     IN      A        66.249.93.99
www.1.google.com.       149     IN      A        66.249.93.147

; ; Query time: 56 msec
; ; SERVER: 192.168.1.45#53(192.168.1.45)
; ; WHEN: Mon Feb 5 14:15:13 2007
; ; MSG SIZE rcvd: 100
```

Tools in Detail

WHOIS

Domain name:
google.co.uk

Registrant:
Google Inc

Registrant type:
Non-UK Corporation

Registrant's address:
1600 Amphitheatre Parkway
Mountain View
CA
94043
United States

Registrant's agent:
Markmonitor Inc. t/a Markmonitor
URL: <http://www.markmonitor.c>

Relevant dates:
Registered on: 14-Feb-1999
Renewal date: 14-Feb-2009
Last updated: 17-Jan-2007

Registration status:
Renewal request being processed.

Name servers:
ns1.google.com
ns2.google.com
ns3.google.com
ns4.google.com



Tools in Detail

Pchar

Estimates bandwidth, latency and packet loss on network links.

This is a re-working of the “pathchar” utility, written by Van Jacobson and, like traceroute, is based on repeated packet transmission and TTL variation (it can use ICMP or UDP).

It is available for most “*nix” systems : It works for IPv4 & IPv6.

Traceroute (UDP) knows when it has found its target by using a port number beyond the “normal range” ... when ICMP “port unreachable” is returned it’s there!

Pchar sends many packets, one hop at a time, with varying the sizes, until the target is reached or the path fails. It calculates the latency from the ICMP message response times, and the throughput per hop from the variance in response speeds. Collectively, this also gives the overall round-trip delay for the whole path.

It is not fool-proof ; it’s traffic may **not** be allowed ; it is not a “Holy Grail” ; but it does give a good indication!

Tools in Detail

Pchar - ./pchar www.google.co.uk

pchar to www.1.google.com (66.249.93.104) using UDP/IPv4
Using raw socket input

Packet size increments from 32 to 1500 by 32
46 test(s) per repetition : 32 repetition(s) per hop

Warning: target host did not respond to initial test.

0: 192.168.1.231 (dhcp-192-168-1-231.uk.willdata.com)
Partial loss: 0 / 1472 (0%)
Partial char:

rtt = 0.959029 ms, (b = 0.001150 ms/B), r2 = 0.999475
stddev rtt = 0.003212, stddev b = 0.000004

Partial queueing: avg = 0.000171 ms (148 bytes)

Hop char: rtt = 0.959029 ms, bw = 6954.330709 Kbps

Hop queueing: avg = 0.000171 ms (148 bytes)

1: 81.144.212.33 (81.144.212.33)
Partial loss: 0 / 1472 (0%)

Partial char: rtt = 5.784087 ms, (b = 0.005317 ms/B), r2 = 0.999798
stddev rtt = 0.009218, stddev b = 0.000011

Partial queueing: avg = 0.002336 ms (667 bytes)

Hop char: rtt = 4.825058 ms, bw = 1919.855256 Kbps

Hop queueing: avg = 0.002165 ms (519 bytes)

2: 62.7.96.41 (62.7.96.41)
Partial loss: 0 / 1472 (0%)

Partial char: rtt = 5.824306 ms, (b = 0.005317 ms/B), r2 = 0.999847
stddev rtt = 0.008008, stddev b = 0.000010

Partial queueing: avg = 0.001486 ms (667 bytes)

Hop char: rtt = 0.040220 ms, bw = --- Kbps

Hop queueing: avg = -0.000850 ms (0 bytes)

3: 194.72.3.66 (core2-gig10-1.kingston.ukcore.bt.net)
???

-

process hangs at this point!

Tools in Detail



Pchar - ./pchar 192.168.1.8 (a local address)

pchar to 192.168.1.8 (192.168.1.8) using UDP/IPv4
Using raw socket input

Packet size increments from 32 to 1500 by 32

46 test(s) per repetition : 32 repetition(s) per hop

0: 192.168.1.231 (dhcp-192-168-1-231.uk.williamdata.com)

```
Partial loss: 0 / 1472 (0%)
Partial char: rtt = 10.792415 ms, (b = 0.003369 ms/B), r2 = 0.157013
              stddev rtt = 0.950840, stddev b = 0.001177
Partial queueing:
Hop char:    avg = 0.015037 ms (4463 bytes)
            rtt = 10.792415 ms, bw = 2374.706954 kbps
Hop queueing:
1: 192.168.1.8 (zplex.uk.williamdata.com)
```

Path length: **1 hops**
Path char: **rtt** = 10.792415 ms **r2** = 0.157013
Path bottleneck: 2374.706954 kbps
Path pipe: 3203 bytes
Path queueing: average = 0.0150
Start time: Thu Feb 1 09:07
End time: Thu Feb 1 09:14

Partial loss	= number of pkts / percentage pkts lost
Partial char	= RTT, delay Byte, min delay pkt
Partial queueing	= ave. queue of data incl. of this hop
Hop char	= RTT and b/width for the current hop
Hop queueing	= average queue of data this hop
Path bottleneck	= "bottleneck" (achieved) bandwidth
Path pipe	= Bandwidth-Delay Product = traffic "on the wire" (cf RWIN buffer)

Tools in Detail



Pchar

Remember:

- ICMP may be restricted over the test path
- Not all platforms have the same controls or defaults
- Think of the impact on the network of using these kind of tools!!

The figures produced are estimates (ref. pchar “man pages” of pchar and, as already mentioned for some previous tools, the results will probably not reflect the exact behaviour of the applications using the same path.

Learn more at:

<http://www.kitchenlab.org/www/bmah/Software/pchar/>

Tools in Detail

Netcat

Netcat - a read/write utility for networks (TCP or UDP).

It can be used on its own or be driven by user code.

It is also a very powerful network debugging and exploration tool, which can create almost any kind of connection:-

- Outbound or inbound, TCP or UDP, to or from any ports
- Full DNS forward/reverse checking, with appropriate warnings
- Ability to use any local source port
- Ability to use any locally-configured network source address
- Built-in port-scanning capabilities, with randomizer
- Can read command line arguments from standard input
- Slow-send mode, one line every N seconds
- Hex dump of transmitted and received data
- Ability to let another program service established connections
- Telnet-options responder

Good for testing applications and application paths, but does not "test" or measure the network itself.

Beware of misuse!

Tools in Detail

Netcat

connect to somewhere: nc [-options] hostname port[s] [ports] ::.
listen for inbound: nc -l -p port [options] [hostname] [port]
options:

- d detach from console, background mode
- e prog inbound program to exec [dangerous!!]
- g gateway source-routing hop point[s], up to 8
- G num source-routing pointer: 4, 8, 12, ...
- h this help
- i secs delay interval for lines sent, ports scanned
- l listen mode, for inbound connects
- L listen harder, re-listen on socket close
- n numeric-only IP addresses, no DNS
- o file hex dump of traffic
- p port local port number
- r randomize local and remote ports
- s addr local source address
- t answer TELNET negotiation
- U UDP mode
- V verbose [use twice to be more verbose]
- w secs timeout for zero-I/O mode
- z port numbers can be individual or ra

Learn more at:

<http://netcat.sourceforge.net/>

<http://nmap.org/ncat/>

Tools in Detail



Netcat – Retrieve page from web server

```
C:\>nc -v www.google.co.uk 80  
www.1.google.com [216.239.59.103] 80 (http) open  
GET / HTTP/1.0
```

```
HTTP/1.0 302 Found  
Location: http://www.google.co.uk/  
Cache-Control: private  
Set-Cookie:  
PREF=ID=bebff53d3e8c044c6;TM=1170500572;LM=1170500572;S=DBX029wrwxh5ex5E;  
expires=Sun, 17-Jan-2038 19:14:07 G  
MT; path=/; domain=.google.com  
Content-Type: text/html  
Server: GWS/2.1  
Content-Length: 221  
Date: Sat, 03 Feb 2007 11:02:52 GMT  
Connection: Keep-Alive
```



```
<HTML><HEAD><meta http-equiv="content-type" content="text/html; charset=utf-8">  
<TITLE>302 Moved</TITLE></HEAD><BODY><H1>  
<H1>302 Moved</H1>  
The document has moved  
<A href="http://www.google.co.uk/">here</A>  
</BODY></HTML>
```

Tools in Detail

Netcat - "NC" to "NC" connection

```
c:\>nc -1 -p 23 -t -e cmd.exe
```

```
C:\Documents and settings\gdw>netstat -a
```

```
Active Connections  
Proto Local Address Foreign Address State  
TCP wds-gdw:ft  
TCP wds-gdw:te  
TCP wds-gdw:er  
TCP wds-gdw:mi  
TCP wds-gdw:10  
TCP wds-gdw:53  
TCP wds-gdw:10  
TCP . . .  
C:\>ipconfig  
Windows IP Configuration  
Ethernet adapter Local Area Connection:  
Connection-specific DNS Suffix :  
IP Address . . . . . : 192.168.27.10  
Subnet Mask . . . . . : 255.255.255.0  
Default Gateway . . . . . : 192.168.27.1
```

```
C:\>&C
```

```
C:\>ipconfig  
Windows IP Configuration  
Ethernet adapter Local Area Connection:  
Connection-specific DNS Suffix :  
IP Address . . . . . : 192.168.27.50  
Subnet Mask . . . . . : 255.255.255.0  
Default Gateway . . . . . : 192.168.27.1
```

SNMP - MIBs

iReasoning

iReasoning MIB Browser

SHARE
Technology • Competitions • Results

Address: 192.168.1.231:161

OID: .1.3.6.1.2.1.2.1.2

Advanced... Value

Name/OID	Value
.1.3.6.1.2.1.1.4.7	3
.1.3.6.1.2.1.1.4.8	3
.1.3.6.1.2.1.1.4.9	3
ifNumber.0	3
ifIndex.1	1
ifIndex.2	2
ifIndex.3	3
ifDescr.1	lo
ifDescr.2	eth0
ifDescr.3	sit0
ifType.1	softwareLoopback
ifType.2	ethernet-tsmacd
ifType.3	131
ifMtu.1	16436
ifMtu.2	1500
ifMtu.3	1480
ifSpeed.1	10000000
ifSpeed.2	10000000
ifSpeed.3	0
ifPhysAddress.1	0x00 0x06 0x5B 0x37 0xF3 0x46
ifPhysAddress.2	
ifPhysAddress.3	
ifAdminStatus.1	up
ifAdminStatus.2	up
ifAdminStatus.3	down
ifOperStatus.1	up
ifOperStatus.2	up
ifOperStatus.3	down
ifInOctets.1	517411240
ifInOctets.2	3765775664
ifInOctets.3	0
ifInUcastPkts.1	3233084
ifInUcastPkts.2	
ifInUcastPkts.3	
ifInDiscards.1	
ifInDiscards.2	

Node Name: interfaces

OID	Syntax	Status	DefVal	Indexes	Descr
.1.3.6.1.2.1.2					.iso.org.dod.internet.mgmt.mib-2.interfaces

Learn more at:
<http://www.ireasoning.com/>

SNMP - MIBs

IMPLEX

Object	Host Name	Community	MaxRequest	ADCDPL	P390	TCP/IP	Value
System	192.168.1.231	public	128				
Interfaces							
ifNumber							
ifTable							
ifEntry							
ifIndex							
1							1
2							2
3							3
ifDescr							
ifType							
ifMtu							
ifSpeed							
ifPhysAddress							
ifAdminStatus							
ifOperStatus							
ifLastChange							
ifInOctets							
ifInUcastPkts							
ifInNucastPkts							
ifInDiscards							
ifInErrors							
ifInUnknownProtos							
ifOutOctets							
ifOutUcastPkts							
ifOutNucastPkts							
ifOutDiscards							
ifOutErrors							
ifOutQLen							
ifSpecific							
at							
ip							
icmp							
tcp							
objects	265						7671
F1 Help F2 Reset F3 End F4 Prompt F7 Up F8 Down F9 AltView							

Packet Analysers – “Sniffers”

- “Original” capture routine - **TCPDUMP** + **LIBPCAP** (the Promiscuous Capture Library) or **WinPcap**. Available on most “open” platforms.
- **SSLDUMP** is TCPDUMP with SSL decryption capability.
- **ETHERAL** is a packet analyzer based on TCPDUMP.
- **WIRESHARK** is the latest incarnation of ETHERAL
 - Shows actual packets on the network with “breakdown”.
 - Good for true analysis of the network **and** for establishing “common use” baselines.
- **EXIGENCE** provides similar functionality for z/OS.

Tools in Detail

"Wireshark"

The screenshot shows the Wireshark interface with three main panes:

- Panels:** File, Edit, View, Go, Capture, Analyze, Statistics, Help.
- Filter:** Expression... Clear Apply
- Packet List:** Shows 12 captured frames. Frame 10 is highlighted in yellow.
- Details:** Shows the structure of the selected frame (Frame 10).
- Bytes:** Shows the raw byte data of the selected frame.

Details Panel (Frame 10):

Field	Value
Header Length:	20 bytes
Version:	4
Identification:	0x6b5d (27485)
Flags:	0x00
0... = Reserved bit:	Not set
0... = Differentiated Services Codepoint:	Default (0x00)
...0. = ECN-Capable Transport (ECT):	0
...0. = ECN-CE:	0
Total Length:	71
Protocol:	UDP (0x11)

Bytes Panel (Frame 10):

```

0000 00 50 7f d0 1a a8 00 12 3f d2 4d 66 08 00 45 00 P.....?MF..E.
0010 00 47 6b 5d 00 00 80 11 17 ed c0 a8 1b 0a c0 a8 Gk.....b.5.3 ...
0020 1b 01 06 62 00 35 00 33 ed a6 00 01 01 00 00 01 ...1.27.168.
0030 00 00 00 00 00 00 01 32 31 02 32 37 03 31 36 38 03 192.in-a.ddr.arpa
0040 31 39 32 07 69 6e 2d 61 64 64 72 04 61 72 70 61 .....
0050 00 00 0c 00 01 ..... .

```

Text Overlay:

The three panes show the traffic flow, the headers, and the data in dump format.


Highlighting is reflected in the lower panes.

This image shows the IP header . . .

[P: 12 D: 12 M: 0 Drops: 0]

Tools in Detail

"Wireshark"

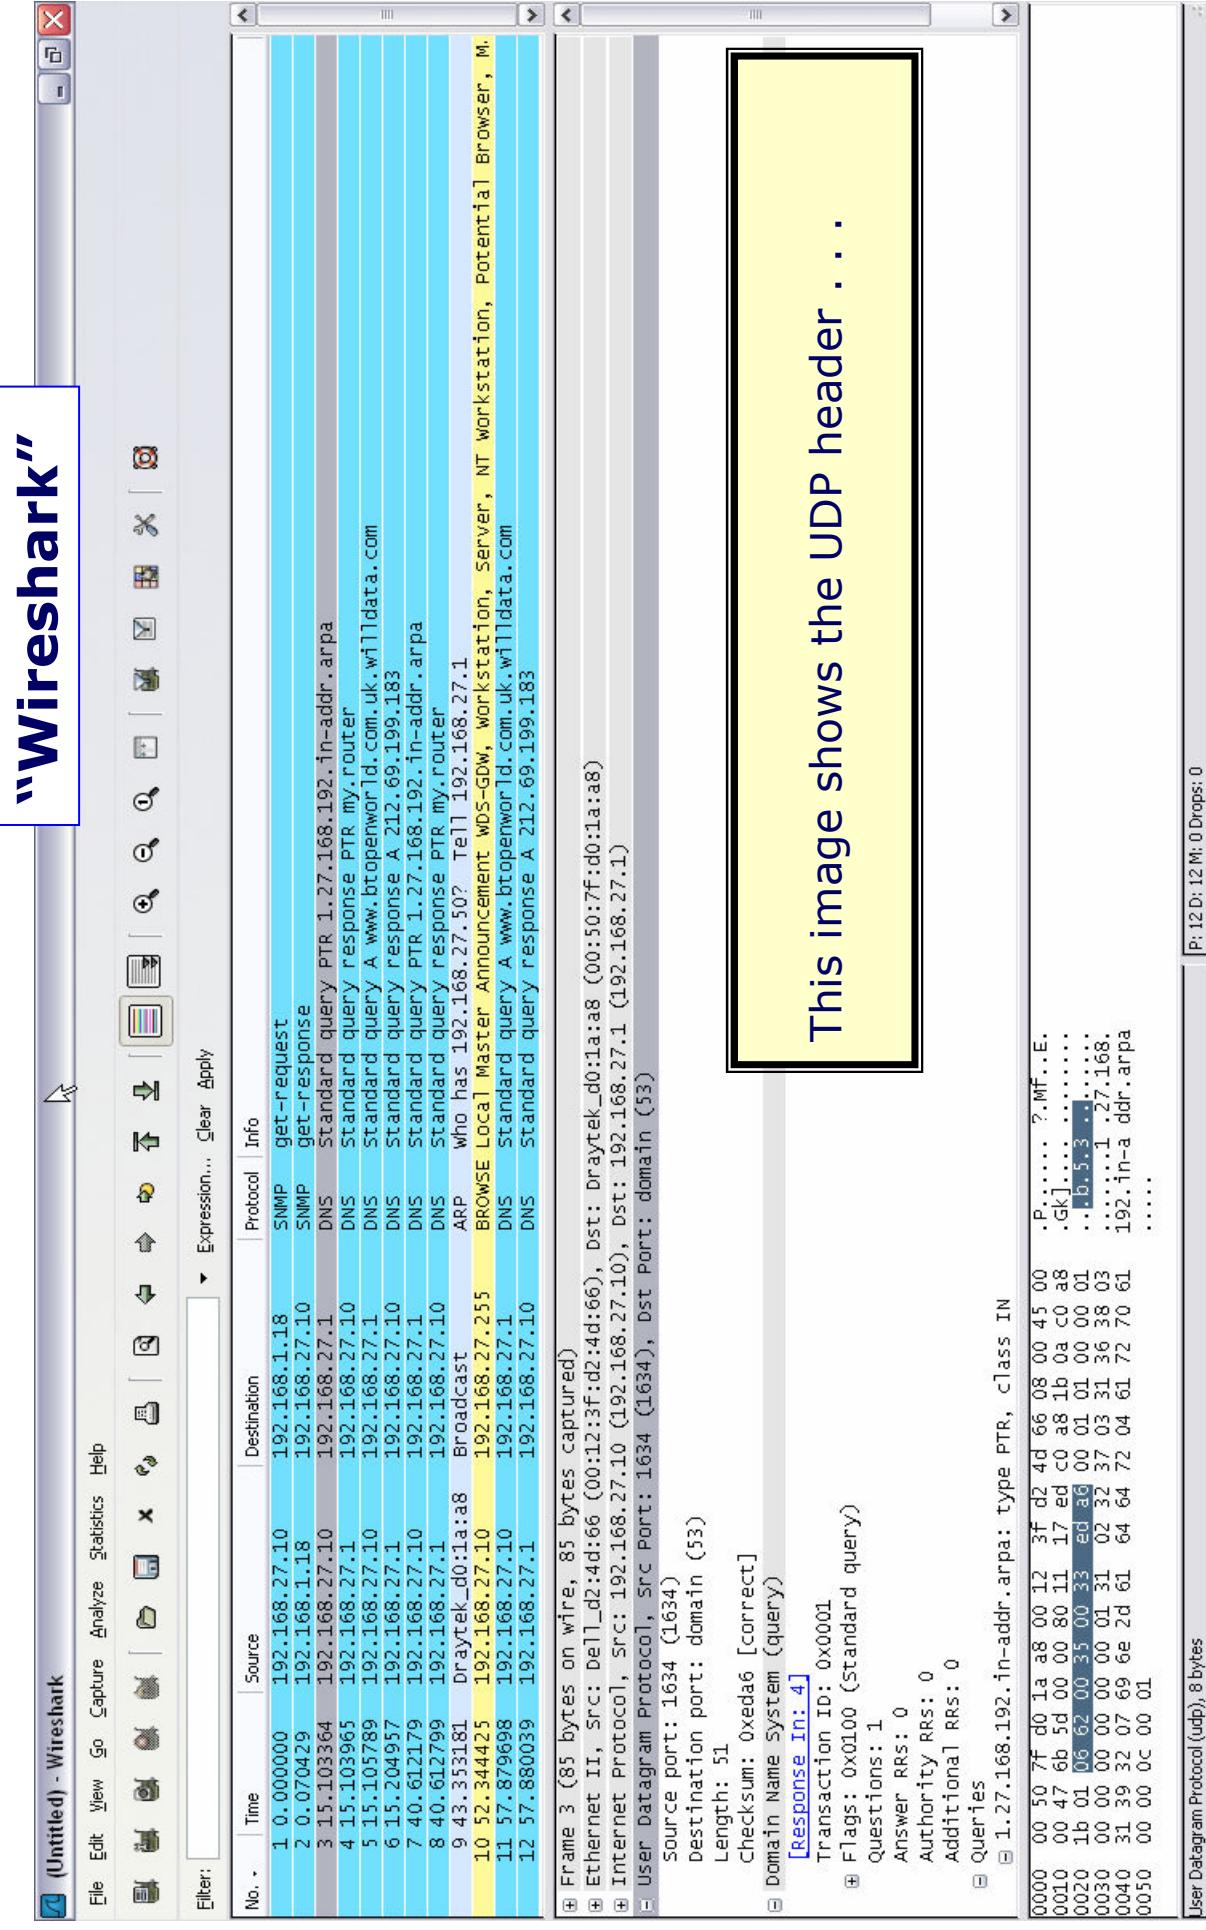

The screenshot shows the Wireshark interface with several captured network frames. Frame 3 is highlighted with a yellow box, showing its details:

- Frame 3 (85 bytes on wire, 85 bytes captured)**
- Ethernet II, src: dell_d2:d4:d6 (00:12:3f:d2:d4:d6), dst: draytek_d0:1a:a8 (00:50:7f:d0:1a:a8)**
- Internet Protocol Version 4 (IPv4) [src: 192.168.27.10 (192.168.27.10), dst: 192.168.27.1 (192.168.27.1)]**
- User Datagram Protocol [src port: 1634 (1634), dst port: domain (53)]**
- Source port: 1634 (1634)**
- Destination port: domain (53)**
- Length: 51**
- Checksum: Oxeda6 [correct]**
- Response In: 4**
- Transaction ID: 0x0001**
- Flags: 0x0100 (standard query)**
- Questions: 1**
- Answer RRS: 0**
- Authority RRS: 0**
- Additional RRS: 0**
- Queries**
- 1. 1.27.168.192.192.in-addr.arpa: type PTR, class IN**

A yellow box highlights the UDP header of the selected frame:

```

No.  Time          Source                Destination           Protocol Info
    1.  0.000000000  192.168.27.10      192.168.1.18        SNMP   get-request
    2.  0.070429    192.168.1.18        192.168.27.10      SNMP   get-response
    3.  15.103364   192.168.27.10      192.168.27.1       DNS    Standard query
    4.  15.103965   192.168.27.1       192.168.27.10      DNS    Standard query response PTR 1.27.168.192.in-addr.arpa
    5.  15.105789   192.168.27.10      192.168.27.1       DNS    Standard query response PTR my.router
    6.  15.204957   192.168.27.1       192.168.27.10      DNS    Standard query response A www.btopenworld.com.uk.willidata.com
    7.  40.612179   192.168.27.10      192.168.27.1       DNS    Standard query response A 212.69.199.183
    8.  40.612799   192.168.27.1       192.168.27.10      DNS    Standard query response PTR my.router
    9.  43.353181   Broadcast            192.168.27.10      ARP    Who has 192.168.27.502 Tell 192.168.27.1
    10. 52.344475   192.168.27.10     192.168.27.255     BROWSE Local Master Announcement wds-GDW, workstation, server, NT workstation, Potential Browser, M.
    11. 57.879698   192.168.27.10     192.168.27.1       DNS    Standard query response A www.btopenworld.com.uk.willidata.com
    12. 57.880039   192.168.27.1       192.168.27.10      DNS    Standard query response A 212.69.199.183
  
```

This image shows the UDP header . . .

[P: 12 D: 12 M: 0 Drops: 0]

Tools in Detail

"EXIGENCE"

The screenshot illustrates the EXIGENCE tool interface, which includes:

- File, Trace, Record, Navigate, Filter, View, Window, Help** menu bar.
- Toolbar** with icons for search, zoom, and file operations.
- Table** showing the timeline of sessions:

Record	Time (GMT+00)	IP Address 1	Port 1	Direction	IP Address 2	Port 2
1	13:15:31.124	10.20.1.81	ftp	→	10.20.1.71	10.20.1.71
2	13:15:31.136	10.20.1.81	ftp	→	10.20.1.71	TCP connect
4	13:15:31.135	10.20.1.81	ftp	→	10.20.1.71	ftp-Ready
6	13:15:31.134	10.20.1.81	ftp	→	10.20.1.71	ftp-Ready
7	13:15:31.133	10.20.1.81	ftp	→	10.20.1.71	ftp-User
9	13:15:33.335	10.20.1.81	ftp	→	10.20.1.71	ftp-Pwd needed
10	13:15:33.347	10.20.1.81	ftp	→	10.20.1.71	ftp-Password
12	13:15:35.151	10.20.1.81	ftp	→	10.20.1.71	ftp-Logged in
13	13:15:35.184	10.20.1.81	ftp	→	10.20.1.71	ftp-Type
14	13:15:35.265	10.20.1.81	ftp	→	10.20.1.71	ftp-OK
15	13:15:35.558	10.20.1.81	ftp	→	10.20.1.71	ftp-Port
16	13:15:35.597	10.20.1.81	ftp	→	10.20.1.71	ftp-OK
17	13:15:35.613	10.20.1.81	ftp	→	10.20.1.71	ftp-Retrieve
18	13:15:35.709	10.20.1.81	ftp-data	→	10.20.1.71	TCP connect
19	13:15:35.712	10.20.1.81	ftp-data	→	10.20.1.71	TCP connect
22	13:15:35.824	10.20.1.81	ftp	→	10.20.1.71	ftp-xfer starting
23	13:15:36.010	10.20.1.81				
24	13:15:36.010	10.20.1.81				
26	13:15:36.075	10.20.1.81				
29	13:15:36.362	10.20.1.81				
31	13:15:36.383	10.20.1.81				
32	13:15:36.431	10.20.1.81				
33	13:15:36.470	10.20.1.81				
34	13:15:36.491	10.20.1.81				
36	13:15:36.514	10.20.1.81				
- Right Window:** A detailed view of "Exigence Trace 132 Record 22 [Zos15]" showing the TCP header fields and their meanings.

This image shows the equivalent displays in EXIGENCE; in this case for an FTP session.
(<http://www.willdata.com/>)



SHARE Technology: Connections • Results

Tools in Detail

WILLIAM PALEY SYSTEMS

„ZEN Trace and Solve“

ZEN Trace and Solve

IP Traces

	New	TraceID	Status	Taken	Description
00001	Taken	16 Feb 2011 11:47	Test Trace	TONYA	220
00002	Taken	16 Feb 2011 11:49	EE Trace	TONYA	178
00003	Taken	17 Feb 2011 12:18	Interface LINKOSA-48	TONYA	18
00004	Taken	17 Feb 2011 16:04	Interface LINKOSA-48	TONYA	24

Trace 00001 Started 16-02-2011 at 11:47: Packets traced 220

Packet	Time	Length	Protocol	IP Address	IP Address	Ports	Window	ACK	Window size
000001	11:47:05.23153	64	TCP	10.5.1.11	10.5.1.11	6121	2499	BOAB74F9	397F08AF 32731
000002	11:47:05.24325	64	TCP	10.5.1.11	10.5.1.11	6121	2499	397F08AF	BOAB7505 32756
000003	11:47:05.24963	706	TCP	10.5.1.11	10.5.1.11	6121	2499	BOAB7505	397F08BB 32756
000004	11:47:05.25422	78	UDP	10.20.1.133	255.255.255.255	137	137		
000005	11:47:05.57010	217	TCP	192.168.5.103	10.5.1.11	50113	27000	10B9AD90	EFA95BAA 32660
000006	11:47:05.57149	576	TCP	192.168.5.103	10.5.1.11	50113	27000	10B9AE35	EFA95BAA 32660
000007	11:47:05.57149	576	TCP	192.168.5.103	10.5.1.11	50113	27000	10B9AE35	EFA95BAA 32660
000008	11:47:05.57149	576	TCP	192.168.5.103	10.5.1.11	50113	27000	10B9AE35	EFA95BAA 32660
000009	11:47:05.57149	292	TCP	192.168.5.103	10.5.1.10	1+09	Protocol		TCP
000010	11:47:05.57338	52	TCP ACK	10.5.1.10	10.5.1.10	8216			
000011	11:47:05.57462	52	TCP ACK	10.5.1.11	10.5.1.11	+0C	Checksum		
000012	11:47:05.65033	52	TCP ACK	192.168.5.103	192.168.5.103	+10	Source IP Address		
000013	11:47:05.65191	52	TCP ACK	192.168.5.103	192.168.5.103	+10	Target IP Address		
000014	11:47:05.65203	52	TCP ACK	192.168.5.103	192.168.5.103	+10	TCP Header		
000015	11:47:06.48634	205	UDP	192.168.23.5	192.168.23.5	27000	Source Port		
000016	11:47:06.48647	241	UDP	10.5.1.241	10.5.1.241	2+02	Destination Port		
000017	11:47:06.48663	241	UDP	10.5.1.241	10.5.1.241	+04	Sequence Number		
000018	11:47:06.83501	56	TCP	10.5.1.11	10.5.1.11	+08	Ack Sequence Number		
000019	11:47:06.83992	576	TCP	10.5.1.11	10.5.1.11	+0C	Header Length		
000020	11:47:06.84038	52	TCP ACK	10.5.1.11	10.5.1.11	+0D	Header Length		
000021	11:47:06.84128	106	TCP	10.5.1.11	10.5.1.11	+10	Flags		
000022	11:47:06.84200	52	TCP ACK	10.5.1.11	10.5.1.11	+10	Window Size		
000023	11:47:06.84388	56	TCP	10.5.1.10	10.5.1.10	+12	TCP Checksum		
000024	11:47:06.84489	576	TCP	10.5.1.10	10.5.1.10	+12	Urgent Pointer		
000025	11:47:06.84489	106	TCP	10.5.1.10	10.5.1.10	+13	Packet Data		
000026	11:47:06.84594	56	TCP	10.5.1.11	10.5.1.11	+14	Packet Data		
000027	11:47:06.84662	630	TCP	10.5.1.11	10.5.1.11	+14	Packet Data		
000028	11:47:06.84689	52	TCP ACK	10.5.1.11	10.5.1.11	+14	Packet Data		
000029	11:47:06.85004	52	TCP ACK	10.5.1.10	10.5.1.10	+14	Packet Data		
000030	11:47:06.85288	52	TCP ACK	10.5.1.10	10.5.1.10	+14	Packet Data		

Trace 0001 Entry 00005 Header Expansion

Top Previous Next Bottom

16:27:07

Tools in Detail

“ZEN Trace and Solve”

IP				Description	Entries
	TraceID	Status	Taken	Userid	
000011	0001	Taken	16 Feb 2011 11:47	TONYA	220
00002		Taken	16 Feb 2011 11:49	TONYA	178
00003		Taken	17 Feb 2011 12:18	TONYA	18
00004		Taken	17 Feb 2011 16:04	TONYA	24

Packet Time	Packet Length	Trace 0001 Started 16-02-2011 at 11:47: Packets traced 220			
000011	11:47:05.57462	52	10.5.1.11 (6121) → 10.5.1.11 (2499)		
	IP Header	45000034 26F00000 40060000 0A05010B			
000012	TCP Header	17E909C3 397F08BB B0AB7793 80187D72 00000000 0101080A 5D47F2D9	5D47F19B		
		192.168.5.103 (50113) → 10.5.1.11 (27000)			
000013	11:47:05.65033	52	45000034 A26A4000 3E06C93A C0A80567 0A05010B		
	IP Header	C3C16978 EFA95BAA 10B9AE35 80101080A 18C22723	5D47F2D4		
000014	11:47:05.65191	52	192.168.5.103 (50113) → 10.5.1.11 (27000)		
	IP Header	45000034 116D4000 3E065A38 C0A80567 0A05010B			
000015	11:47:05.65203	52	C3C16978 EFA95BAA 10B9B24D 8010FFF0 DA290000 0101080A 18C22723	5D47F2D5	
	IP Header	192.168.5.103 (50113) → 10.5.1.11 (27000)			
000016	11:47:06.48634	205	45000034 7B034000 3E06F0A1 C0A80567 0A05010B		
	TCP Header	C3C16978 EFA95BAA 10B9B549 80101080A 18C22723	5D47F2D5		
000017	11:47:06.48663	241	192.168.23.5 (138) → 255.255.255.138		
	IP Header	450000CD 30150000 7F11335E C0A81705 FFFFFFFF			
000018	11:47:06.48647	241	UDP Header 008A008A 00B99C0A		
		10.5.1.241 (138) → 10.5.1.255 (138)			
000019	11:47:06.83992	56	IP Header 45000038 CF8F0000 3E06DC50 C0A80528 0A0501FF		
		10.5.1.11 (27001) → 192.168.5.40 (2193)			
000020	11:47:06.84038	52	TCP Header 08916979 6A1B5B6D CF7546E0 80187F19 15880000 0101080A 5D47B2C6		
		10.5.1.11 (27001) → 192.168.5.40 (2193)			
16:27:07	Show Elapsed	Contract	No Frags	No Acks	Goto Entry 11 Fair Select
					Top Previous Next Bottom

ZTS - Exigence in the ZEN Framework.
(<http://www.willidata.com/>)

And, In Passing

Network & Security testers

- “**Nessus**” - (“**The Tenable Newt**”) a security vulnerability scanner.
(www.nessus.org)

- “**Nmap**” - a network and security scanner
([insecure.org & nmap.org](http://insecure.org/nmap.org))

Use responsibly – Use with care !

Tools in Detail

Nmap (edited)

```
>nmap -v -A 192.168.27.50
```

```
Starting Nmap 4.20 ( http://insecure.org ) at 2007-02-03 11:40 GMT Standard Time
Initiating ARP Ping Scan at 11:40
Scanning 192.168.27.50 [1 port]
Completed ARP Ping Scan at 11:40, 0.20s elapsed (1 total hosts)
Initiating Parallel DNS resolution of 1 host. at 11:40
Completed Parallel DNS resolution of 1 host. at 11:40, 0.03s elapsed
Initiating SYN Stealth Scan at 11:40 : Scanning 192.168.27.50 [1697 ports]
Discovered open port 135/tcp on 192.168.27.50
Completed SYN Stealth Scan at 11:40, 39.05s elapsed (1697 total ports)
Initiating Service scan at 11:40 : scanning 1 service on 192.168.27.50
Completed Service scan at 11:41, 11.63s elapsed (1 service on 1 host)
Warning: OS detection for 192.168.27.50 will be MUCH less reliable because we did not
find at least 1 open and 1 closed TCP port
.
```

- Host 192.168.27.50 appears to be up ... good.
Interesting ports on 192.168.27.50:
Not shown: 1696 filtered ports

PORT	STATE	SERVICE	VERSION
135/tcp	open	msrpc	Microsoft Windows RPC
		MAC Address:	xx:xx:xx:xx:xx:xx (Dell ESG PCba Test)
		Running (JUST GUESSED)	: Microsoft Windows 2000 XP (98%)
		No exact OS matches for host (test conditions non-ideal).	
		Network Distance:	1 hop : TCP Sequence Prediction: Diffculty=0 (trivial joke)

- OS and service detection performed. Nmap finished: 1 IP address (1 host up) scanned in 67.000 seconds

```
Raw packets sent: 3517 (162.066KB) | Rcvd: 86 (4770B)
```

(NB. This sample has
been edited to fit !)



Outline Steps:

- Check the stack – “**ping**” local loopback
- “**ping**” the remote host/server name
- “**ping**” with IP address – the DNS may be down
- If “ping” fails “**traceroute**” - find where it stops
- Use “**netstat**” to check the interface
- Check routing (is it as expected?)
 - If ping works, try “**telnet**” (standard port 23)
 - If “**telnet**” works try **telnet to the application port**
 - If that works try the application
- Use “**netstat**” to check the connection exists
 - Check your syslogs (remember USS ! “syslogd” !)
 - Do you **still** have a failure? ... **trace it!**



- Know Your Network !
- Keep Up-to-Date Documentations & Diagrams !
- Know the Tools (most tools can be used for practice at any time)
- Plan Your Approach to Any Problem
- Stop , Look , and LISTEN !!



SHARE
Technology • Connections • Results

Thank you!

