



# Network Problem Diagnosis with Packet Traces

**David J Cheng** 

**Applied Expert Systems, Inc.** 

davec@aesclever.com

August 8, 2012, 9:30AM Session 11895



## **Agenda**



- z/OS: Using CTRACE
  - Packet Trace
  - Data Trace
  - OSAENTA Trace
- Linux, Unix/AIX: tcpdump (Windows: windump)
- TCP/IP revisited
- Sample Cases
  - OSA
    - Excessive / Dropped packets, addressing errors
    - Checksum offloading
  - DNS, DHCP
  - FTP Flow analysis, brute force attack
  - AT-TLS Flow analysis



## **How to Take a Packet Trace?**




### z/OS CTRACE:

- SYSTCPDA
  - Packet Trace
    - Scope: TCP/IP stack
    - Packets entering or leaving the TCP/IP stack
  - Data Trace
    - scope: TCP/IP stack
    - Socket data into and out of the Physical File System (PFS)
- SYSTCPOT
  - OSAENTA
    - Scope: LPAR or CHPID
    - Frames entering or leaving an OSA adapter for a connected host





## TCP/IP Networking API Relationship\*

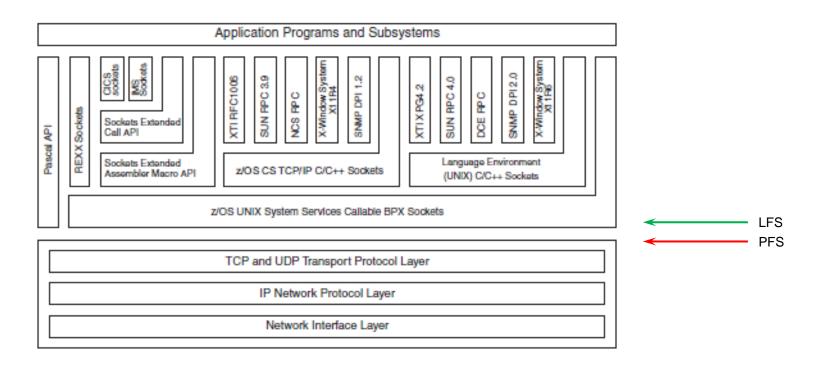



<sup>\*</sup> Comm Server IP Sockets API Guide & Ref.



## z/OS CTRACE: SYSTCPDA – Packet Trace

Set up an External Writer Proc

```
E.g., SYS1.PROCLIB(AESWRT):
//IEFPROC EXEC
PGM=ITTTRCWR,REGION=0K,TIME=1440,DPRTY=15
//TRCOUT01 DD DISP=SHR,DSN=trace.dataset
```

Set up tracing parameters

```
E.g., SYS1.PARMLIB(CTAESPRM):

TRACEOPTS ON WTR(AESWRT)

... other trace options ...
```





## z/OS CTRACE: SYSTCPDA – Packet Trace

To Start Tracing:

```
TRACE CT, WTRSTART=AESWRT

V TCPIP, tcpip, PKT, CLEAR

V TCPIP, tcpip, PKT, LINKN=<link>, ON, FULL, PROT=TCP, IP=<ip addr>
TRACE CT, ON, COMP=SYSTCPDA, SUB=(TCPIP), PARM=CTAESPRM
```

To Stop Tracing:

```
V TCPIP, tcpip, PKT, OFF
TRACE CT, OFF, COMP=SYSTCPDA, SUB=(TCPIP)
TRACE CT, WTRSTOP=AESWRT, FLUSH
```

- To View Tracing Status:
  - D TRACE, WTR=AESWRT

    Verify that the external writer is active
  - D TCPIP, tcpip, NETSTAT, DE
    Verify that **TrRecCnt** is non-zero and incrementing





## z/OS CTRACE: SYSTCPDA Parameters

System Parameters	
TCP/IP Proc : TCPIP	(TCP/IP Proc Name)
Writer Proc : AESWRT	External Writer Proc Name
Parm Member : CTAESPRM	(Trace Options Parmlib Member)
Trace Parameters	
Trace Mode :	
Link / INTF : *	(Link / Interface Name, * for all)
Packet Length : FULL	(1 - 65535, FULL for entire packet)
Protocol : *	(TCP, UDP, ICMP, ICMPV6, 0-255, * for all)
IP Address : *	(Source/Destination IP Address, *for all)
Subnet/Mask/Prefix : 255.255.255	(IPV4 subnet/mask or IPV6 prefix length)
Source Port : *	(Source Port, * for all)
Destination Port : *	(Destination Port, *for all)
Packet Port : *	(1-65535, * for any source/destination port)
Discard : NONE	(ALL, NONE, *, or Discard Code: 4096 - 20479)

SHARE in Anaheim

# z/OS CTRACE: SYSTCPDA Starting a Trace



```
Packet Trace Command Display
COMMAND ===> _
                                                               Scroll ===> CSR
TRACE CT,WTRSTART=AESWRT
ITT038I ALL OF THE TRANSACTIONS REQUESTED VIA THE TRACE CT COMMAND WERE SUCCESS
FULLY EXECUTED.
IEE839I ST=(ON,0001M,00001M) AS=ON BR=OFF EX=ON
                                                  MO=OFF MT=(ON,064K)
        ISSUE DISPLAY TRACE CMD FOR SYSTEM AND COMPONENT TRACE STATUS
        ISSUE DISPLAY TRACE, TT CMD FOR TRANSACTION TRACE STATUS
ITT110I INITIALIZATION OF CTRACE WRITER AESWRT COMPLETE.
V TCPIP,TCPIP,PKT,CLEAR
EZZ00601 PROCESSING COMMAND: VARY TCPIP, TCPIP, PKT, CLEAR
EZZ0053I COMMAND VARY PKTTRACE COMPLETED SUCCESSFULLY
V TCPIP,TCPIP,PKT,LINKN=*,ON,FULL,PROT=*,IP=*,SUBN=255.255.255.255,SRCP=*,DEST=
EZZ0060I PROCESSING COMMAND: VARY TCPIP,TCPIP,PKT,LINKN=*,ON,FULL,PROT=*,IP=*,S
UBN=255.255.255.255,SRCP=*,DEST=*
EZZ0053I COMMAND VARY PKTTRACE COMPLETED SUCCESSFULLY
TRACE CT,ON,COMP=SYSTCPDA,SUB=(TCPIP),PARM=CTAESPRM
ITT038I ALL OF THE TRANSACTIONS REQUESTED VIA THE TRACE CT COMMAND WERE SUCCESS
FULLY EXECUTED.
IEE839I ST=(0N,0001M,00001M) AS=0N BR=0FF EX=0N M0=0FF MT=(0N,064K)
        ISSUE DISPLAY TRACE CMD FOR SYSTEM AND COMPONENT TRACE STATUS
        ISSUE DISPLAY TRACE, TT CMD FOR TRANSACTION TRACE STATUS
```



# z/OS CTRACE: SYSTCPDA Checking Trace Status



```
Packet Trace Command Display ------ Line 1
COMMAND ===>
                                                               Scroll ===> CSR
D TRACE, WTR=AESWRT
IEE8431 00.27.10 TRACE DISPLAY 789
        SYSTEM STATUS INFORMATION
 ST=(0N,0001M,00001M) AS=0N BR=0FF EX=0N M0=0FF MT=(0N,064K)
 WRITER STATUS / HEAD COMPONENT SUBNAME
 AESWRT
          ACTIVE
                          SYSTCPDA TCPIP
D TCPIP, TCPIP, NETSTAT, DE
EZD01011 NETSTAT CS V1R11 TCPIP 791
DEVNAME: LOOPBACK
                           DEVTYPE: LOOPBACK
  DEVSTATUS: READY
 LNKNAME: LOOPBACK
                             LNKTYPE: LOOPBACK
                                                 LNKSTATUS: READY
    ACTMTU: 65535
  ROUTING PARAMETERS:
    MTU SIZE: N/A
                                METRIC: 00
    DESTADDR: 0.0.0.0
                                SUBNETMASK: 0.0.0.0
  PACKET TRACE SETTING:
    PROTOCOL: *
                                TRRECCNT: 00000033
                                                    PCKLENGTH: FULL
    DISCARD:
              NONE
    SRCPORT:
                                DESTPORT: *
                                                    PORTNUM: *
    IPADDR:
                                SUBNET:
  MULTICAST SPECIFIC:
    MULTICAST CAPABILITY: NO
 LINK STATISTICS:
    BYTESIN
                                      = 4620
    INBOUND PACKETS
    INBOUND PACKETS IN ERROR
    INBOUND PACKETS DISCARDED
    INBOUND PACKETS WITH NO PROTOCOL
    BYTESOUT
                                      = 4620
                                      = 79
    OUTBOUND PACKETS
                                      = 0
    OUTBOUND PACKETS IN ERROR
    OUTBOUND PACKETS DISCARDED
                                      = 0
INTFNAME: LOOPBACK6
                            INTFTYPE: LOOPBACK6
                                                 INTESTATUS: READY
    ACTMTU: 65535
  PACKET TRACE SETTING:
    PROTOCOL: *
                                TRRECCNT: 00000000
                                                    PCKLENGTH: FULL
    DISCARD:
              NONE
```



# z/OS CTRACE: SYSTCPDA Stopping a Trace



```
Packet Trace Command Display
COMMAND ===>
                                                               Scroll ===> CS
V TCPIP,TCPIP,PKT,OFF
EZZ0060I PROCESSING COMMAND: VARY TCPIP,TCPIP,PKT,OFF
EZZ0053I COMMAND VARY PKTTRACE COMPLETED SUCCESSFULLY
TRACE CT,OFF,COMP=SYSTCPDA,SUB=(TCPIP)
ITT038I ALL OF THE TRANSACTIONS REQUESTED VIA THE TRACE CT COMMAND WERE SUCCESS
FULLY EXECUTED.
IEE8391 ST=(ON,0001M,00001M) AS=ON
                                    BR=OFF EX=ON
                                                   MO = OFF MT = (ON, 064K)
        ISSUE DISPLAY TRACE CMD FOR SYSTEM AND COMPONENT TRACE STATUS
        ISSUE DISPLAY TRACE, TT CMD FOR TRANSACTION TRACE STATUS
TRACE CT,WTRSTOP=AESWRT,FLUSH
ITT038I ALL OF THE TRANSACTIONS REQUESTED VIA THE TRACE CT COMMAND WERE SUCCESS
FULLY EXECUTED.
IEE839I ST=(ON,0001M,00001M) AS=ON BR=OFF EX=ON
                                                   MO=OFF MT=(ON,064K)
        ISSUE DISPLAY TRACE CMD FOR SYSTEM AND COMPONENT TRACE STATUS
        ISSUE DISPLAY TRACE, TT CMD FOR TRANSACTION TRACE STATUS
ITT111I CTRACE WRITER AESWRT TERMINATED BECAUSE OF A WTRSTOP REQUEST.
```





## z/OS CTRACE: SYSTCPDA – Data Trace

To Start/Stop Data Trace:

```
V TCPIP,tcpip,DAT,ON,<trace options>
V TCPIP,tcpip,DAT,OFF
```

To View Tracing Status:

D TCPIP, tcpip, NETSTAT, CONFIG

```
DATA TRACE SETTING:

JOBNAME: * TRRECCNT: 00000033 LENGTH: FULL

IPADDR: * SUBNET: *

PORTNUM: *
```



## z/OS CTRACE: SYSTCPOT – OSAENTA Trace



- OSA-Express Network Traffic Analyzer (OSAENTA)
  - Trace data is collected (by the device drivers of OSA) as frames enter or leave an OSA adapter for a connected host
  - The host can be an LPAR with z/OS, z/VM or Linux
  - ARP packets, MAC headers (w/VLAN tags)
  - The trace function is controlled by z/OS Communication Server, while the data is collected in the OSA at the network port

## Pre-Regs:

- Required the microcode for the OSA (2094DEVICE PSP and the 2096DEVICE PSP).
- Update the OSA using the Hardware Management Console (HMC) to:

Define more data devices to systems that will use the trace function.

Set the security for the OSA:

LOGICAL PARTITION - Only packets from the LPAR CHPID - All packets using this CHPID

Verify the TRLE definitions for the OSA that it has one DATAPATH address available for tracing. Note that **two** DATAPATH addresses are required – one for data transfers and the other for trace data. Copyright © 2012 Applied Expert Systems, Inc.



## TRLE Definition and D NET,TRL,TRLE=

```
OSATRL2 VBUILD TYPE=TRL
OSATRL2E TRLE LNCTL=MPC, READ=(0404), WRITE=(0405), DATAPATH=(0406,0407), X
PORTNAME=DR281920, X
MPCLEVEL=QDIO
```

```
D NET,TRL,TRLE=OSATRX2E
IST0971 DISPLAY ACCEPTED
IST075I NAME = OSATRL2E, TYPE = TRLE 988
IST1954I TRL MAJOR NODE = OSATRL2
IST486I STATUS= ACTIV, DESIRED STATE= ACTIV
                                 , CONTROL = MPC , HPDT = YES
IST087I TYPE = LEASED
                = DR281920
                                              OSA CODE LEVEL = 0310
IST2337I CHPID TYPE = OSD
IST1577I HEADER SIZE = 4096 DATA SIZE = 0 STORAGE = ***NA***
IST1221I WRITE DEV = 0405 STATUS = ACTIVE
                                             STATE = ONLINE
IST1577I HEADER SIZE = 4092 DATA SIZE = 0 STORAGE = ***NA***
              DEV = 0406 STATUS = ACTIVE
                                             STATE = N/A
        I/O TRACE = OFF
                         TRACE LENGTH = *NA*
IST1717I ULPID = TCPIP
IST2310I ACCELERATED ROUTING DISABLED
                QUEUE
        QUEUE
                          READ
                          STORAGE
                PRIMARY
                          4.0M(64 SBALS)
IST2305I NUMBER OF DISCARDED INBOUND READ BUFFERS = 0
IST1757I PRIORITY1: UNCONGESTED PRIORITY2: UNCONGESTED
IST1757I PRIORITY3: UNCONGESTED PRIORITY4:
IST2190I DEVICEID PARAMETER FOR OSAENTA TRACE COMMAND = 00-01-00-02
IST1801I UNITS OF WORK FOR NCB AT ADDRESS X'158EA010'
IST1802I P1 CURRENT = 0 AVERAGE = 0 MAXIMUM
IST1802I P2 CURRENT = 0 AVERAGE =
IST1802I P3 CURRENT
                   = 0 AVERAGE =
IST1221I TRACE DEV = 0407 STATUS = RESET
```

Copyright © 2012 Applied Expert Systems, Inc.



## z/OS CTRACE: OSAENTA Parameters



System Parameters		
TCP/IP Proc :	TCPIP	(TCP/IP Proc Name)
Writer Proc :	AESWRT	External Writer Proc Name
Parm Member :	CTAESPRM	(Trace Options Parmlib Member)
OSA Port Name :	DR281920	(Port name for tracing)
Trace Parameters		
Data Length :	FULL	(64 - 65472, FULL for entire packet)
Trace Amount :	0	(1 - 2147483647 MB, 0 = Max value)
No. of Frames :	0	(100 - 2147483647 frames, 0 = Max value)
Trace Duration :	1	(1 - 10080 minutes, 0 = Max value)
Discard :	NONE	(ALL, NONE, EXCEPTION, or discard code: 1 - 4087)
Device ID :	*	(8-hex digits OSA Device ID, * for all)
Protocol :	*	(TCP, UDP, ICMP, ICMPV6, 0 - 255, * for all)
IP Address :	*	(* for all)
Mask Bits/Prefix :	32	(IPV4 mask bits or IPV6 prefix length)
Port number :	*	(1 - 65535, * for all)
Ethernet Type :	*	(IPV4, IPV6, ARP, SNA, 0600 - FFFF, * for all)
Mac Address :	*	(12-hex digits MAC address, * for all)
VLAN ID :	*	(0 - 4094, ALL for VLAN tag, * for all)



## z/OS CTRACE: OSAENTA

To Start Tracing:

```
TRACE CT, WTRSTART=AESWRT

V TCPIP, tcpip, OSAENTA, PORTNAME=<port>, CLEAR

V TCPIP, tcpip, OSAENTA, PORTNAME=<port>, ON, NOFILTER=ALL

TRACE CT, ON, COMP=SYSTCPOT, SUB=(TCPIP), PARM=CTAESPRM
```

To Stop Tracing:

```
V TCPIP,,OSAENTA,PORTNAME=<port>,OFF
TRACE CT,OFF,COMP=SYSTCPOT,SUB=(TCPIP)
TRACE CT,WTRSTOP=AESWRT,FLUSH
```

- To View Tracing Status:
  - D TRACE, WTR=AESWRT to verify that the external writer is active
  - D TCPIP, tcpip, NETSTAT, DE to check status





## z/OS CTRACE: OSAENTA

To View Tracing Status (continued):

D TCPIP, tcpip, NETSTAT, DE

```
OSA-EXPRESS NETWORK TRAFFIC ANALYZER INFORMATION:
```

OSA PORTNAME: DR281920 OSA DEVSTATUS: READY
OSA INTFNAME: EZANTADR281920 OSA INTFSTATUS: READY

OSA SPEED: 1000 OSA AUTHORIZATION: LOGICAL PARTITION

OSAENTA CUMULATIVE TRACE STATISTICS:

DATAMEGS: 1 FRAMES: 3625 DATABYTES: 1641283 FRAMESDISCARDED: 0

FRAMESLOST: 0

#### OSAENTA ACTIVE TRACE STATISTICS:

DATAMEGS: 0 FRAMES: 23
DATABYTES: 6148 FRAMESDISCARDED: 0
FRAMESLOST: 0 TIMEACTIVE: 2

OSAENTA TRACE SETTINGS: STATUS: ON

DATAMEGSLIMIT: 2147483647 FRAMESLIMIT: 2147483647

**ABBREV:** 480 TIMELIMIT: 10080

DISCARD: NONE

OSAENTA TRACE FILTERS: NOFILTER: ALL

DEVICEID: \*
MAC: \*
VLANID: \*
ETHTYPE: \*
IPADDR: \*
PROTOCOL: \*
PORTNUM: \*

Copyright © 2012 Applied Expert Systems, Inc.





## z/OS CTRACE: OSAENTA ABBREV Parm

- Specify <u>FULL</u> or ABBREV={length | 224 } for the amount of data to be traced.
- ABBREV allows a value up to 64K, why the maximum value is reset to 480?
- "An OSA might limit the amount of data that is actually traced."
  - To conserve the OSA trace buffer space
  - ABBREV value is rounded up to the next 32-byte multiple with a maximum of 480
- To circumvent this limitation, start Packet Trace at the same time.



# Linux, Unix and AIX: tcpdump (Windows: windump)



- Requires root authority; use the "su" command first
- Output is formatted trace (default) or written to a pcap file
- tcpdump –w xyz.pcap
- tcpdump –v (sample output from SLES 11 on System z)

```
16:23:18.803265 IP (tos 0x10, ttl 64, id 63277, offset 0, flags [DF], proto TCP
(6), length 40) etpglsj.dal-ebit.ihost.com.ssh > 172.29.96.42.56570: ., cksum 0x
96e2 (correct), ack 2111375775 win 158
16:23:18.805880 IP (tos 0x10, ttl 64, id 63278, offset 0, flags [DF], proto TCP
(6), length 172) etpglsj.dal-ebit.ihost.com.ssh > 172.29.96.42.56570: P 0:132(13


 ack 1 win 158

16:23:18.806155 IP (tos 0x0, ttl 64, id 51563, offset 0, flags [DF], proto UDP (
17), length 71) etpglsj.dal-ebit.ihost.com.33031 > ns.dfw.ibm.com.domain: 56736+
PTR? 42.96.29.172.in-addr.arpa. (43)
16:23:18.808816 IP (tos 0x0, ttl 26, id 23382, offset 0, flags [none], proto UDP
 (17), length 148) ns.dfw.ibm.com.domain > etpglsj.dal-ebit.ihost.com.33031: 567
36 NXDomain 0/1/0 (120)
16:23:18.858199 IP (tos 0x0, ttl 127, id 1215, offset 0, flags [none], proto UDP
 (17), length 78) 172.29.96.56.netbios-ns > 172.29.191.255.netbios-ns: NBT UDP P
ACKET(137): QUERY; REQUEST; BROADCAST
16:23:18.858309 IP (tos 0x0, ttl 126, id 1215, offset 0, flags [none], proto UDP
(17), length 78) 172.29.96.56.netbios-ns > 172.29.191.255.netbios-ns: NBT UDP P
ACKET(137): QUERY; REQUEST; BROADCAST
16:23:18.858548 IP (tos 0x0, ttl 64, id 51568, offset 0, flags [DF], proto UDP (
17), length 71) etpglsj.dal-ebit.ihost.com.55971 > ns.dfw.ibm.com.domain: 64720+
PTR? 56.96.29.172.in-addr.arpa. (43)
16:23:18.859303 IP (tos 0x0, ttl 125, id 1215, offset 0, flags [none], proto UDP
(17), length 78) 172.29.96.56.netbios-ns > 172.29.191.255.netbios-ns: NBT UDP P
```



## **Networking Stack Support for TCP/IP**



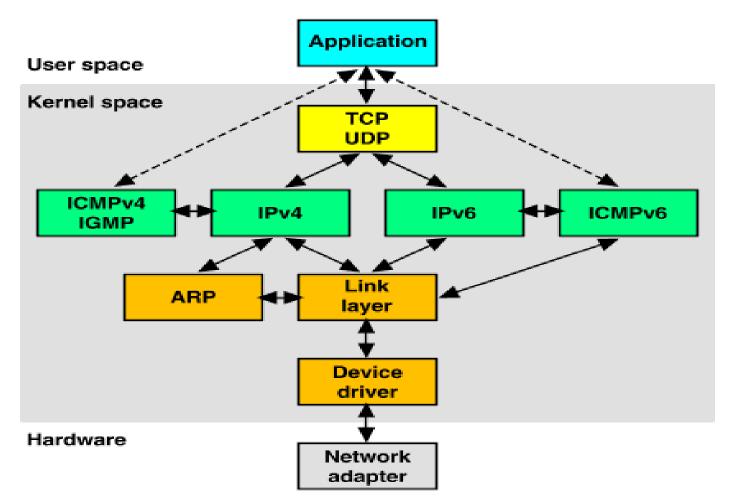


Source: http://uw713doc.sco.com/en/NET\_tcpip/tcpN.tcpip\_stack.html



## **Encapsulation of Application Data within a Network Stack**



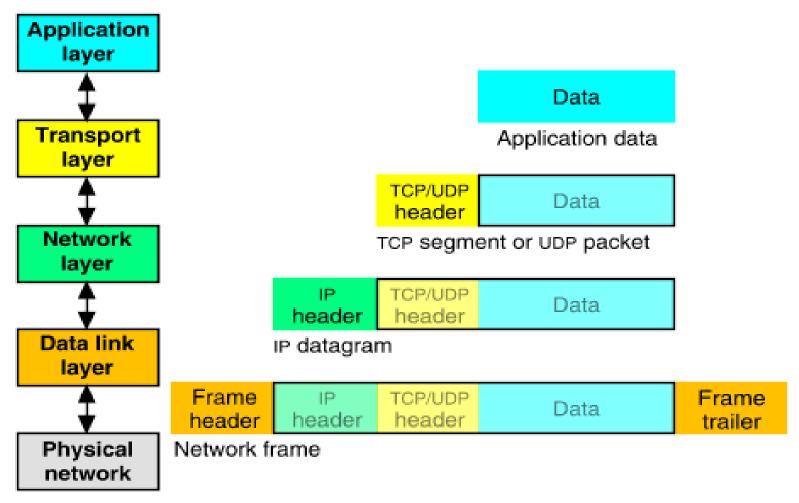


Source: http://uw713doc.sco.com/en/NET\_tcpip/tcpN.tcpip\_stack.html



## **IP Header Format**



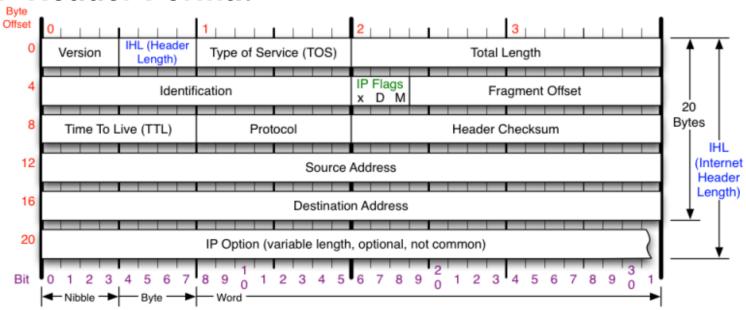

#### Version

Version of IP Protocol. 4 and 6 are valid. This diagram represents version 4 structure only.

#### Header Length

Number of 32-bit words in TCP header, minimum value of 5. Multiply by 4 to get byte count.

#### Protocol

IP Protocol ID. Including (but not limited to):

1 ICMP 17 UDP 57 SKIP 2 IGMP 47 GRE 88 EIGRP 6 TCP 50 ESP 89 OSPF 9 IGRP 51 AH 115 L2TP

9 IGRP 51 AH 115 L2

#### Total Length

Total length of IP datagram, or IP fragment if fragmented. Measured in Bytes.

#### Fragment Offset

Fragment offset from start of IP datagram. Measured in 8 byte (2 words, 64 bits) increments. If IP datagram is fragmented, fragment size (Total Length) must be a multiple of 8 bytes.

#### Header Checksum

Checksum of entire IP header IP Flags

x D M

x 0x80 reserved (evil bit) D 0x40 Do Not Fragment M 0x20 More Fragments follow

#### **RFC 791**


Please refer to RFC 791 for the complete Internet Protocol (IP) Specification.

Source: http://nmap.org/book/images/hdr/MJB-IP-Header-800x576.png






### **ICMP Header Format**

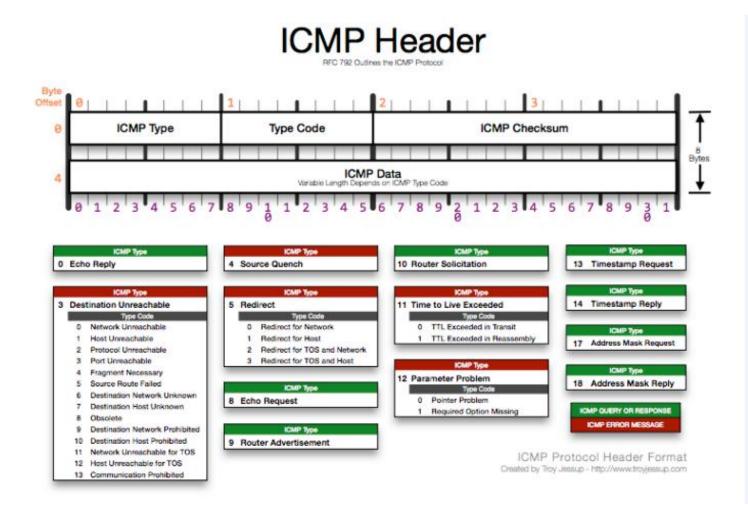






### **UDP Header Format**

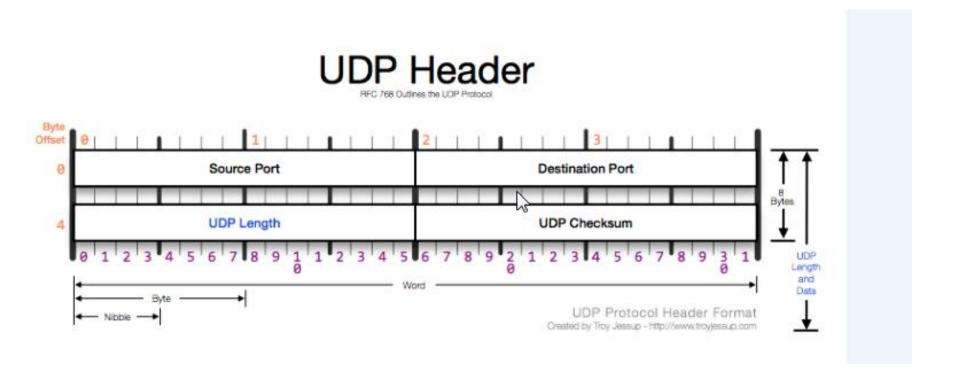



### **TCP Header Format**



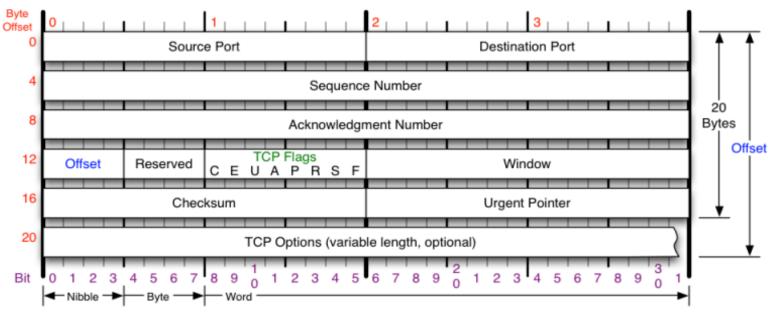

SHAR Technology - Cannelloss -

## CEUAPRSF

TCP Flags

Congestion Window C 0x80 Reduced (CWR)

E 0x40 ECN Echo (ECE)

U 0x20 Urgent

A 0x10 Ack

P 0x08 Push

R 0x04 Reset

S 0x02 Syn

F 0x01 Fin

#### Congestion Notification

ECN (Explicit Congestion Notification). See RFC 3168 for full details, valid states below.

Packet State	DSB	ECN bit
Syn	0.0	11
Syn-Ack	0.0	0 1
Ack	0 1	0.0
No Congestion	0.1	0.0
No Congestion	10	0.0
Congestion	11	0.0
ceiver Response	11	0 1

Sender Response 11

#### TCP Options

- 0 End of Options List
- 1 No Operation (NOP, Pad)
- 2 Maximum segment size
- 3 Window Scale
- 4 Selective ACK ok
- 8 Timestamp

#### Checksum

Checksum of entire TCP segment and pseudo header (parts of IP header)

#### Offset

Number of 32-bit words in TCP header, minimum value of 5. Multiply by 4 to get byte count.

#### RFC 793

Please refer to RFC 793 for the complete Transmission Control Protocol (TCP) Specification.



## **TCP Flags**




- URG (Urgent) Rarely used; indicates the Urgent Pointer field should be examined.
- ACK (Acknowledgement) Segment contains an acknowledgment. Every segment should have ACK except for SYN or RST segments.
- PSH (Push) Bypass buffering and send/receive the data immediately.
- RST (Reset) Abnormal session termination, close the connection explicitly
- SYN (Synchronize) Synchronize Sequence Numbers to establish a connection
- FIN (Finish) Transaction finished, no more data from sender (but doesn't close connection explicitly)

Copyright © 2012 Applied Expert Systems, Inc.

SHARE

## TCP - Establishing a Connection The 3 Way Handshake



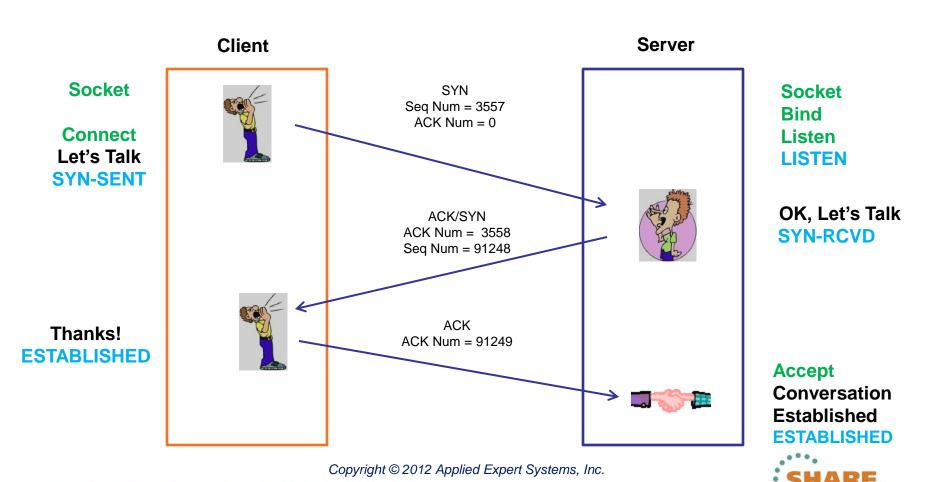

## TCP - Establishing a Connection The 3 Way Handshake



the CleverView® for cTrace Analysis												
File	e He	elp										
	1	<b>∌</b> ⊗ <b>□</b> ← ⇒ C	a 🙉 🦫									
100000000000000000000000000000000000000	COLUMN S			14-1-1	**							
	Tr	affic Errors 5-5 Session	Errors O R	tesp. Time Thresh.	* Application Erro	ors 💮 INIT	Packets TERM Packets INIT Errors TERM E	Errors				
Trac	es c	Query Builder Packet Sui	ummary Ser	quence of Executio	n Response Time	Summary						
2 01			1									
Pr	acket (	Summary		-111			110	7.				
ID	)	Timestamp	Datagram Size	Local IP	Rmt. IP	P otocol	Messages	Local Port	Rmt. Port	Seq. Number	Ack. Number	Window Size
1	86	19:15:14:2502 EST	52	137.72.43.137	137.72.43.207	TCP	SYN	18737	ftp control	372007522	0	65535
1	87	19:15:14:2507 EST	48	137.72.43.207	137.72.43.137	TCP	ACK SYN	ftp control	18737	305077768	372007 3	32768
1	88	19:15:14:2549 EST	40	137.72.43.137	137.72.43.207	TCP	ACK	18737	ftp control	372007523	3059 69	64240
1	91	19:15:14:3793 EST	114	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 220	ftp control	18737	305		32768
1	93	19:15:14:5628 EST	40	137.72.43.137	137.72.43.207	TCP	ACK	18737	ftp control	372 Wir	ndow	64221
1	94	19:15:14:5633 EST	74	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 220	ftp control	18737	305		32768
1	95	19:15:14:7659 EST	40	137.72.43.137	137.72.43.207	TCP	ACK	18737	ftp control	372 S	Size	64213
1	98	19:15:16:0547 EST	54	137.72.43.137	137.72.43.207	TCP	ACK PSH : ftp command USER	18737	ftp control	372007523	305077877	64213
1	99	19:15:16:0681 EST	67	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 331	ftp control	18737	305077877	372007537	32754
2	200	19:15:16:1717 EST	40	137.72.43.137	137.72.43.207	TCP	5 14 PM DESCRIPTION AND PROPERTY OF A STATE		ftp control	372007537	305077904	64206
2	203	19:15:16:5535 EST	52	137.72.43.3	137.72.43.207	TCP	SYN	1909	ftp control	751490806	0	65535
2	204	19:15:16:5540 EST	48	137.72.43.207	137.72.43.3	TCP	ACK SYN	ftp control	1909	305141270	751490807	32768
2	205	19:15:16:5560 EST	40	137.72.43.3	137.72.43.207	TCP	ACK	1909	ftp control	751490807	305141271	64240
2	206	19:15:16:6689 EST	114	137.72.43.207	137.72.43.3	TCP	ACK PSH : ftp reply code 220	ftp control	1909	305141271	751490807	32768
2	207	19:15:16:8751 EST	40	137.72.43.3	137.72.43.207	TCP	ACK	1000	ftp control	751490807	305141345	64221
2	208	19:15:16:8756 EST	74	137.72.43.207	137.72.43.3	TCP	ACK PSH : ftp reply code	bl	1909	305141345	751490807	32768
2	209	19:15:16:8792 EST	53	137.72.43.3	137.72.43.207	TCP	ACK PSH : ftp command SEQ & ACK #	ť'e	ftp control	751490807	305141379	64213
2	211	19:15:17:1092 EST	40	137.72.43.207	137.72.43.3	TCP	ACK PSH		1999	305141379	751490820	32755
2	212	19:15:17:2778 EST	67	137.72.43.207	137.72.43.3	TCP	ACK PSH : ftp reply code		1909	305141379	751490820	32755
2	213	19:15:17:2801 EST	52	137.72.43.3	137.72.43.207	TCP	ACK PSH : ftp command PASS	1909	ftp control	751490820	305141406	64206
2	216	19:15:17:5168 EST	40	137.72.43.207	137.72.43.3	TCP	ACK PSH	ftp control	1979	305141406	751490832	32756
2	217	19:15:17:7234 EST	99	137.72.43.207	137.72.43.3	TCP	ACK PSH : ftp reply code 230	ftp control	1909	305141406	751499632	32756
2	218	19:15:17:7262 EST	46	137.72.43.3	137.72.43.207	TCP	ACK PSH : ftp command SYST	1909	ftp control	751490652	305141465	64191
2	219	19:15:17:7288 EST	120	137.72.43.207	137.72.43.3	TCP	ACK PSH : ftp reply code 215	ftp control	1909	305141465	751490838	32762
2	220	19:15:17:7315 EST	46	137.72.43.3	137.72.43.207	TCP	ACK PSH : ftp command QUIT	1909	ftp control	751490838	305141545	64171
	21	19:15:17:7337 EST	77	137.72.43.207	137.72.43.3	TCP	ACK PSH : ftp reply code 221	ftp control	1909	305141545	751490844	32762
	222	19:15:17:7351 EST	40	137.72.43.207	137.72.43.3	TCP	ACK PSH FIN	ftp control	1909	305141582	751490844	32762
2	223	19:15:17:7375 EST	40	137.72.43.3	137.72.43.207	TCP	ACK	1909	ftp control	751490844	305141583	64162
2	24	19:15:17:7376 EST	40	137.72.43.3	137.72.43.207	TCP	ACK FIN	1909	ftp control	751490844	305141583	64162
2	225	19:15:17:7390 EST	40	137.72.43.207	137.72.43.3	TCP	ACK PSH	ftp control	1909	305141583	751490845	32762
			$\overline{}$			iI( @	2012 Applied Export Systems Inc					-

Copyright © 2012 Applied Expert Systems, Inc.



## TCP - Establishing a Connection - Packet Details



```
||Packet ID : 89
Time : 8/4/2011 17:49:43:0957 CST
 CTE Format ID : IPv4/6 Packet Trace (PTHIdPkt) (4)
 PTHDR T Header
Device Type : MPC IP AQENET Link
 Link Name : OSDL
Flags : IP packet was sent
IP Packet Length : 60 bytes
IP Source: 172.29.122.182
                             IP Remote: 172.29.122.186
 Source Port : 2711 Remote Port : 1034
 TCB Address : 0x7BB220
 ASID
       : 0x54
 Trace Count : 51281450
TP Version 4
 Source : 172.29.122.182 Remote : 172.29.122.186
 Protocol : TCP
Datagram Length : 60
              Fragment Offset : 0
 Flags
 TCP Header Info
 Source Port : 2711
                      Remote Port : 1034
                           Ack. Number : 0
 Seg. Number : 1906430777
Window : 65535
                   Flags : SYN
Maximum segment size: 1460 bytes
NOP
Window scale: 5 (multiply by 32)
NOP
NOP
```



### TCP - Data Transfer (MSS = 1460); Slow Start



R E

<b>I</b> ¶∕ <sub>2</sub>	Timestamp	Elapse Time (hh:mm:ss.tttt)	Datagram Size	Messages	Local Port	Direction	Rmt. Port	Seq. Number	Ack. Number	Window Size
89	17:49:43:0957 CST	00:00:00:000	60	SYN	2711	>	1034	1906430777	0	65535
90	17:49:43:0958 CST	00:00:00:0001	60	ACK SYN	2711	<	1034	202751139	1906430778	65535
91	17:49:43:0959 CST	00:00:00:0001	52	ACK	2711	>	1034	1906430778	202751140	8192
95	17:49:43:2455 CST	00:00:00:1496	1500	ACK	2711	>	1034	1906430778	202751140	8192
96	17:49:43:2455 CST	00:00:00:0000	1500	ACK	2711	>	1034	1906432226	202751140	8192
97	17:49:43:2455 CST	00:00:00:000	1500	ACK PSH	2711	>	1034	1906433674	202751140	8192
98	17:49:43:2457 CST	00:00:00:0002	52	ACK	2711	<	1034	202751140	1906435122	8192
99	17:49:43:2457 CST	00:00:00:000	1500	ACK	2711	>	1034	1906435122	202751140	8192
100	17:49:43:2457 CST	00:00:00:0000	1500	ACK	2711		1034	1906436570	202751140	8192
101	17:49:43:2457 CST	00:00:00:0000	1500	ACK	2711		1034	1906438018	202751140	8192
102	17:49:43:2457 CST	00:00:00:0000	1500	ACK PSH	2711		1034	1906439466	202751140	8192
103	17:49:43:2460 CST	00:00:00:0003	52	ACK	2711	<	1034	202751140	1906440914	8192
104	17:49:43:2460 CST	00:00:00:0000	1500	ACK	2711	>	1034	1906440914	202751140	8192
105	17:49:43:2460 CST	00:00:00:000	1500	ACK	2711	>	1034	1906442362	202751140	8192
106	17:49:43:2460 CST	00:00:00:000	1500	ACK	2711	>	1034	1906443810	202751140	8192
107	17:49:43:2460 CST	00:00:00:0000	1500	ACK	2711	>	1034	1906445258	202751140	8192
108	17:49:43:2460 CST	00:00:00:0000	1500	ACK PSH	2711	>	1034	1906446706	202751140	8192
109	17:49:43:2462 CST	00:00:00:0002	52	ACK	2711	<	1034	202751140	1906448154	8192
110	17:49:43:2462 CST	00:00:00:000	1500	ACK	2711	>	1034	1906448154	202751140	8192
111	17:49:43:2462 CST	00:00:00:0000	1500	ACK	2711	>	1034	1906449602	202751140	8192
112	17:49:43:2462 CST	00:00:00:0000	1500	ACK	2711	>	1034	1906451050	202751140	8192
113	17:49:43:2462 CST	00:00:00:0000	1500	ACK	2711	>	1034	1906452498	202751140	8192
114	17:49:43:2462 CST	00:00:00:0000	1500	ACK	2711	>	1034	1906453946	202751140	8192
115	17:49:43:2462 CST	00:00:00:0000	1500	ACK PSH	2711	>	1034	1906455394	202751140	8192
116	17:49:43:2464 CST	00:00:00:0002	52	ACK	2711	<	1034	202751140	1906456842	8192
117	17:49:43:2464 CST	00:00:00:0000	1500	ACK	2711	>	1034	1906456842	202751140	8192
118	17:49:43:2464 CST	00:00:00:0000	1500	ACK	2711	>	1034	1906458290	202751140	8192
119	17:49:43:2464 CST	00:00:00:0000	1500	ACK	2711	>	1034	1906459738	202751140	8192
120	17:49:43:2464 CST	00:00:00:0000	1500	ACK	2711		1034	1906461186	202751140	8192
121	17:49:43:2464 CST	00:00:00:0000	1500	ACK	2711		1034	1906462634	202751140	8192
122	17:49:43:2464 CST	00:00:00:0000	1500	ACK	2711	>	1034	1906464082	202751140	8192
123	17:49:43:2464 CST	00:00:00:0000	1500	ACK PSH	2711	>	1034	1906465530	202751140	8192

Copyright © 2012 Applied Expert Systems, Inc.






## **TCP - Connection Termination**

I'm done! FIN-WAIT1 Ok! FIN-WAIT2

You're done!

OK!
TIME-WAIT
(2xMSL)

Connection Closed

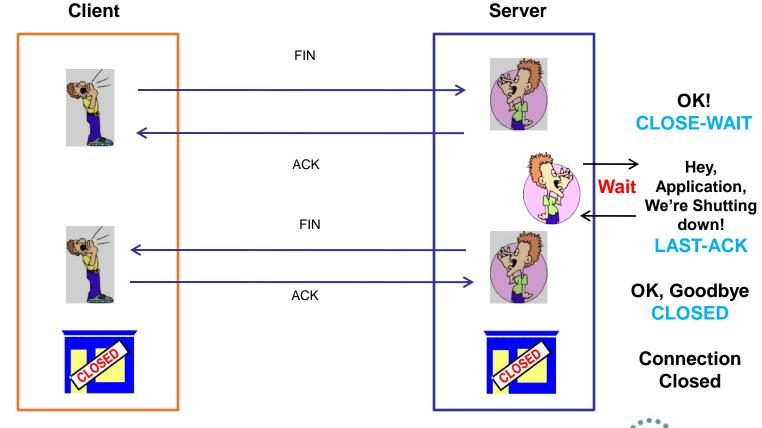

Copyright © 2012 Applied Expert Systems, Inc.

## **TCP - Connection Termination**




Traces	s Que	ery Builder Packet	Summary	Packet Details	Sequence of Ex	ecution Re	esponse Ti	ime Summary	Exception R	eport						
Pack	ket Sum	mary —														
ID		Timestamp	Datagram Size	Local IP	Rmt. IP	ı	Protocol	Messages			Local Port	Rmt. Port	Seq. Number	Ack. Number	Window Size	^
439	9	18:15:39:7282 GMT	1500	137.72.43.20	07 137.72.43	.117	TCP	ACK			ftp data	4410	3598481056	1803247842	32768	
440	0	18:15:39:7283 GMT	52	137.72.43.11	17 137.72.43	.207	TCP	ACK			4410	ftp data	1803247842	3598482504	59743	
44	1	18:15:39:7283 GMT	1500	137.72.43.20	07 137.72.43	.117	TCP	ACK			ftp data	4410	3598482504	1803247842	32768	
44:	2	18:15:39:7283 GMT	1500	137.72.43.20	07 137.72.43	.117	TCP	ACK			ftp data	4410	3598483952		32768	
44:	3	18:15:39:7283 GMT	52	137.72.43.11	17 137.72.43	.207	TCP	ACK			4410	ftp data	1803247842	3598485400	56847	
44	4	18:15:39:7285 GMT	1500	137.72.43.20	07 137.72.43	.117	TCP	ACK			ftp data	4410	3598485400	1803247842	32768	
44:	5	18:15:39:7286 GMT	52	137.72.43.11	17 137.72.43	.207	TCP	ACK			4410	ftp data	1803247842	3598486848	59159	
446		18:15:39:7287 GMT	1500	137.72.43.20			TCP	ACK			ftp data	4410	3598486848		32768	
44	7	18:15:39:7287 GMT	1500	137.72.43.20	07 137.72.43	.117	TCP	ACK			ftp data	4410	3598488296		32768	
448	8	18:15:39:7287 GMT	52	137.72.43.11	17 137.72.43	.207	TCP	ACK			4410	ftp data	1803247842		56263	
449	9	18:15:39:7288 GMT	1500	137.72.43.20	07 137.72.43	.117	TCP	ACK			ftp data	4410	3598489744		32768	
450	0	18:15:39:7290 GMT	1500	137.72.43.20	07 137.72.43	.117	TCP	ACK			ftp data	4410	3598491192	1803247842	32768	
451	1	18:15:39:7290 GMT	52	137.72.43.11	17 137.72.43	.207	TCP	ACK			4410	ftp data	1803247842	3598492640	53367	
453		18:15:39:7291 GMT	1500	137.72.43.20			TCP	ACK	Term	ination	ftp data	4410	3598492640		32768	
45:	3	18:15:39:7292 GMT	1396	137.72.43.20	07 137.72.43	.117	TCP	ACK PSI	Sen	uence	ftp data	4410	3598494088		32768	
454	4	18:15:39:7292 GMT	52	137.72.43.11	17 137.72.43	.207	TCP	ACK	ОСЧ	uence	4410	ftp data	1803247842		50575	
45:	5	18:15:39:7295 GMT	52	137.72.43.11	17 137.72.43	.207	TCP	ACK	_		4410	ftp data	1803247842		56951	
450		18:15:39:7300 GM		137.72.43.11			TCP	ACK			4410	ftp data				
45	7	18:15:39:7447 GMT		137.72.43.20			TCP	ACK PSH FIN			ftp data	4410	3598495432	1803247842	32768	
458	В	18:15:39:7450 GMT	52	137.72.43.11	17 137.72.43	.207	TCP	ACK	<u></u>		4410	ftp data	1803247842	3598495433		
459	9	18:15:39:7454 GM	52	137,72,43,11			TCP	ACK FIN			4410	ftp data	1803247842		65535	
460	0	18:15:39:7491 GMT		137.72.43.20			TCP	ACK PSH			ftp data	4410	3598495433		32768	
461		18:15:39:7799 GMT		137.72.43.11			TCP	ACK			4408	ftp control	250971858		65233	
46:		18:15:39:7816 GMT	78	137.72.43.20			TCP	ACK PSH: ftp	reply code	250	ftp control	4408	3598076766	250971858	32754	
464		18:15:39:9804 GMT	40	137.72.43.11			TCP	ACK			4408	ftp control	250971858		65195	
460		18:15:41:6117 GMT	46	137.72.43.11			TCP	ACK PSH: ftp			4408	ftp control	250971858		65195	
46		18:15:41:6164 GMT		137.72.43.20			TCP	ACK PSH: ftp	reply code	221	ftp control	4408	3598076804	250971864	32762	
460		18:15:41:6172 GM		137,72,43,11			TCP	ACK FIN			4408	ftp control	250971864	3598076841	65158	
469		18:15:41:6191 GMT	40	137.72.43.20			TCP	ACK PSH			ftp control	4408	3598076842	250971865	32762	
470		18:15:41:6195 GMT	40	137.72.43.20			TCP	ACK PSH FIN			ftp control	4408	3598076841	250971864	32762	
47	1	18:15:41:6195 GMT	40	137.72.43.11	17 137.72.43	.207	TCP	ACK			4408	ftp control	250971865	3598076842	65158	~



## **Comparing Traces – Baselining; Multiple Trace Points**




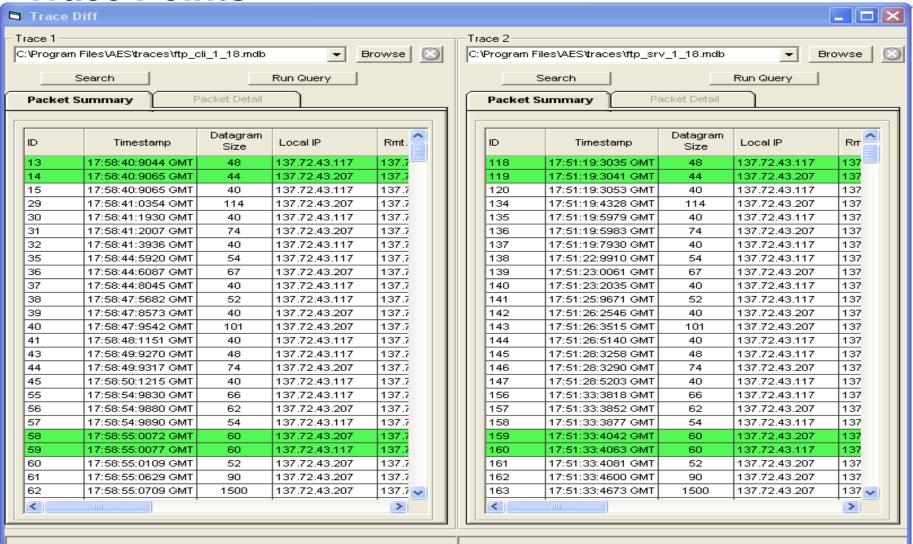



# OSA – Found Excessive Inbound Packets in Real-Time Monitoring



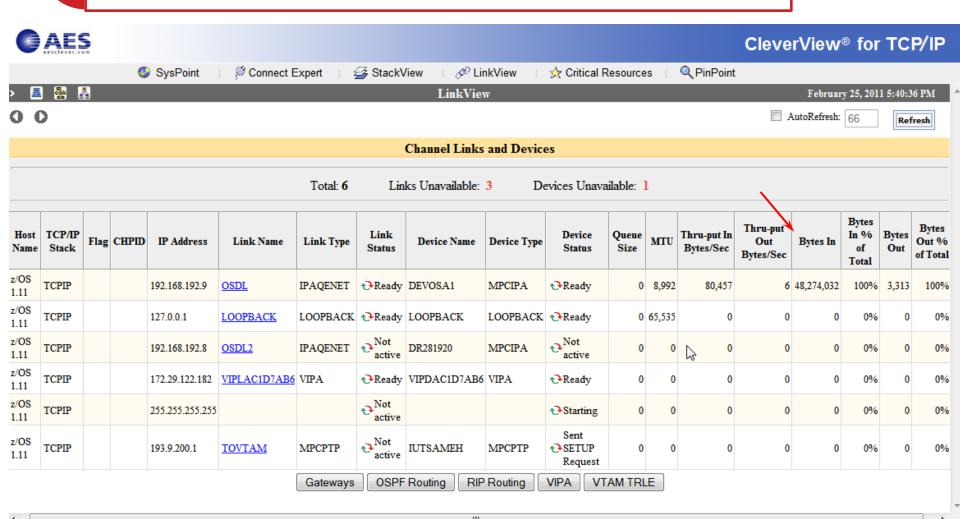

## **Check OSA Links Statistics:**

#### **Netstat Devlinks**

DevName: DEVOSA1 DevType: MPCIPA

DevStatus: Ready

LnkName: OSDL LnkType: IPAQENET LnkStatus: Ready

Speed: 0000001000

IpBroadcastCapability: No

CfgRouter: Non ActRouter: Non

ArpOffload: Yes ArpOffloadInfo: Yes

ActMtu: 8992

VLANid: None VLANpriority: Disabled

ReadStorage: GLOBAL (4096K) InbPerf: Balanced

SecClass: 255 MonSysplex: No

Routing Parameters:

MTU Size: n/a Metric: 00

DestAddr: 0.0.0.0 SubnetMask: 255.255.255.0

Multicast Specific:

Multicast Capability: Yes

Group RefCnt SrcFltMd

224.0.0.1 0000000001 Exclude

SrcAddr: None

Link Statistics:

BytesIn = 25081576230 Inbound Packets = 194853959

Inbound Packets In Error = 194353459

Inbound Packets Discarded = 194352011

Inbound Packets With No Protocol = 0

BytesOut = 103520236

Outbound Packets = 387012

Outbound Packets In Error = 0

Copyright © 2012 Applied Expert Systems, Inc.





## Check IP Statistics: Netstat Stats Proto IP



MVS TCP/IP NETSTAT CS V1R11 TCPIP Name: TCPIP 02:22:49

IP Statistics (IPv4)

Packets Received = 194959223

Received Header Errors = 194429115

Received Address Errors = 194431079

Datagrams Forwarded = 4680

Unknown Protocols Received = 0

Received Packets Discarded = 0

Received Packets Delivered = 523425

Output Reguests = 409928

Output Discards No Route = 0

Output Discards (other) = 0

Reassembly Timeouts = 0

Reassembly Required = (

Reassembly Successful = 0

Reassembly Failures = (

Datagrams Successfully Fragmented = 0

Datagrams Failing Fragmentation = 0

Fragments Created =

Inbound Packets handled by zIIP = 0

Outbound Packets handled by zIIP = 0


(discarded due to IP header errors)

(invalid destination IP address)





## **Check Historical IP Interface Data**

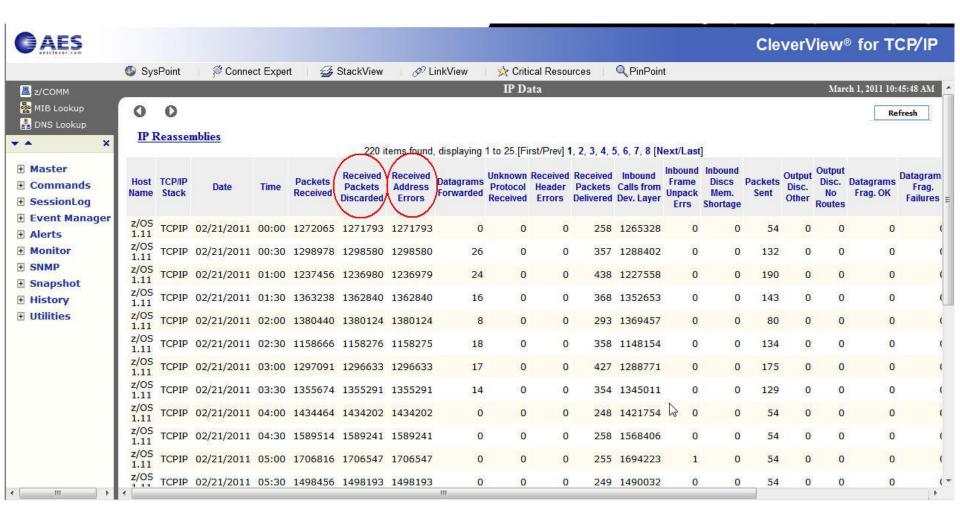







#### VARY TCPIPtcpipproc,PKT,ON,DISCard=ALL

```
PACKET
54550962 S0W1
                            00000004 14:13:05.687445 Packet Trace
 From Interface
                     OSDL
                                       Device: QDIO Ethernet
                                                                 Full=78
                     2011/01/25 14:13:05.687445
                                                                 Intfx: 9
  Tod Clock
  Discard
                     4114 (IP_MAC_BRDCST)
  Segment #
                                       Flags:
                                                In Dscrd
  Source
                     172.29.96.9
                    172.29.191.255
  Destination
                    137
                                                         Asid: 004F TCB: 00000000
  Source Port
                                       Dest Port: 137
 IpHeader: Version : 4
                                       Header Length: 20
                     00
                                       QOS: Routine Normal Service
  Tos
                     78
                                       ID Number: 78B7
  Packet Length
  Fragment
                                       Offset: 0
  TTL
                     82
                                       Protocol: UDP
                                                                 CheckSum: 77A4 FF
                    : 172.29.96.9
  Source
  Destination
                     172.29.191.255
 UDP
                                                                   (netbios-ns)
  Source Port
                    : 137
                            (netbios-ns) Destination Port: 137
 Datagram Length
                     58
                                       CheckSum: 0000 6B36
                                       IP: 172.29.96.9, 172.29.191.255 Offset:
Ip Header
                     20
000000 4500004E
                78B70000 521177A4 AC1D6009
                                              AC1DBFFF
                                       Port: 137, 137
Protocol Header
                                                                 Offset: 14
000000 00890089
                000AE00
                             Data Length: 50
Data
000000 84E20110 00010000 00000000 20464946
000010 41464745 4A464345 48454A45 4F434143
                                                ..¢....¢.|... AFGEJFCEHEJEOCAC
000020 41434143 41434143 41434141 41000020
                                                               ACACACACAAA..
000030 0001
```





# Why were these packets discarded?

- Discard Reason Code
  - Comm Server IP & SNA Codes:

Discard Reason Code	Category
1 – 4095	OSA
4096 – 8191	Interface and IP layer
8192 – 12287	TCP layer
12288 – 20479	Reserved

- 4114 (IP\_MAC\_BRDCST):
   The MAC broadcast packet not accepted.
- Destination IP = 172.29.191.255 ?





#### **Discarded Packets - continued**

- The drop reason code 4114 usually indicates that the packet has a non-broadcast destination IP address and a broadcast media header (the broadcast indicator is on in the media header). This is likely to be caused by an invalid locally administered MAC address.
- Big switched LAN => broadcast flood; use VLAN to preserve bandwidth
- netbios-ns
  - NetBIOS Name Service (over UDP port 137)
  - Similar to DNS
  - Name Query request





#### **OSA Checksum Offload Verification**

- Packet Trace
  - Checksum field = 0 indicates checksum offload is in effect
  - Exceptions
    - Packets that go directly to another stack that shares the same OSA-Express feature
    - IPSec-encapsulated packets
    - Fragmented and reassembled packets
    - Outbound multicast and broadcast packets
  - Outbound TCP packets that contain only a TCP header
    - When multipath is in effect (unless all interfaces in the multipath group support





#### **OSA Statistics from SNMP MIBs**

- IOBSNMP SNMP sub-agent, OSNMPD
- Performance data is available from <u>all</u> LPARs
- Channel PCI bus and processor utilizations (1 min/5 min/1 hr), etc.
- Ethernet Active MAC address, in/out packets and frames, etc.
- "LPAR" (CSS/Image ID) Data transfer rate (1 min/5 min/1 hr), processor utilization (1 min/5 min/1 hr)



# Display OSAINFO Command (z/OS V1R12) General OSA and active protocols info



#### DISPLAY TCPIP, tcpproc, OSAinfo, INTFName=interface

```
EZD00311 TCP/IP CS V1R12 TCPIP Name: TCPCS 15:14:15
Display OSAINFO results for IntfName: LNK29D
PortName: DEV29D PortNum: 01 Datapath: 3902 RealAddr: 0002
PCHID: 0451 CHPID: 29 CHPID Type: OSD OSA code level: 6760
Gen: OSA-E3 Active speed/mode: 1000 mb/sec full duplex
Media: Singlemode Fiber Jumbo frames: Yes Isolate: No
PhysicalMACAddr: 643B88F30000 LocallyCfgMACAddr: 000000000000
Queues defined Out: 4 In: 3 Ancillary queues in use: 2
Connection Mode: Layer 3 IPv4: Yes IPv6: No
SAPSup: 00010293 SAPEna: 00010293
IPv4 attributes:
VLAN ID: N/A VMAC Active: No
Defined Router: Non Active Router: No
AsstParmsEna: 00215C66 OutCkSumEna: 00000000 InCkSumEna: 00000000
Registered Addresses:
IPv4 Unicast Addresses:
ARP: Yes Addr: 10.10.10.10
Total number of IPv4 addresses: 1
IPv4 Multicast Addresses:
MAC: 01005E000001 Addr: 224.0.0.1
Total number of IPv4 addresses: 1
Ancillary Input Queue Routing Variables:
Queue Type: BULKDATA Queue ID: 2 Protocol: TCP
Src: 11.1.1.11..100
Dst: 12.12.12.12.100
Src: 13.3.3.13..101
Dst: 14.14.14.14.101
Total number of IPv4 connections: 2
Queue Type: SYSDIST Queue ID: 3 Protocol: TCP
Addr: 10.10.10.10
Total number of IPv4 addresses: 1
```



# **DNS**



- UDP/TCP Port 53
  - Message ID Transaction ID that associates DNS queries with responses
  - Some of the flags in DNS header
    - Request/Response
    - Recursion Desired (RD)
    - Truncation Occurred (> 512 bytes)
    - Response Code
      - 0 No Error
      - 1 Format Error
      - 2 Server Failure
      - 3 Name Error
      - 4 Not Implemented
      - 5 Refused



# **DNS Queries**



D	Timestamp	Datagram Size	Local IP	Rmt. IP	Protocol	Messages	Local Port	Rmt. Port
1	07:24:50:3078 CST	72	192.168.1.100	192.168.0.254	UDP	dns : client query (Standard)	2541	dns
2	07:24:50:3867 CST	179	192.168.0.254	192.168.1.100	UDP		dns	2541
3	07:24:51:5927 CST	71	192.168.1.106	192.168.0.254	UDP	dns : server response (Name Error)	1920	dns
•						dns : client query (Standard)		
4	07:24:51:7502 CST	71	192.168.0.254	192.168.1.106	UDP	dns : server response (Server Failure)	dns	1920
5	07:24:52:3261 CST	68	192.168.200.12	192.168.200.51	UDP	dns : client query (Standard)	1178	dns
6	07:24:52:3265 CST	487	192.168.200.51	192.168.200.12	UDP	dns : server response (No Error)	dns	1178
7	07:24:52:3460 CST	68	192.168.200.12	192.168.200.51	UDP	dns : client query (Standard)	1179	dns
8	07:24:52:3464 CST	487	192.168.200.51	192.168.200.12	UDP	dns : server response (No Error)	dns	1179
9	07:24:54:6302 CST	57	192.168.200.12	192.168.200.51	UDP	dns : client query (Standard)	1183	dns
10	07:24:55:3164 CST	71	192.168.1.100	192.168.0.254	UDP	dns : client query (Standard)	2542	dns
11	07:24:55:3958 CST	178	192.168.0.254	192.168.1.100	UDP	dns : server response (Name Error)	dns	2542
12	07:24:55:6304 CST	57	192.168.200.12	192.168.200.51	UDP	dns : client query (Standard)	1183	dns
13	07:24:56:8673 CST	72	192.168.200.12	192.168.200.51	UDP	dns : client query (Standard)	1187	dns
14	07:24:57:6333 CST	57	192.168.200.12	192.168.200.51	UDP	dns : client query (Standard)	1183	dns
15	07:24:57:8638 CST	72	192.168.200.12	192.168.200.51	UDP	dns : client query (Standard)	1187	dns
16	07:24:58:5960 CST	71	192.168.1.105	192.168.0.254	UDP	dns : client query (Standard)	4555	dns
17	07:24:58:6765 CST	71	192.168.0.254	192.168.1.105	UDP	dns : server response (Server Failure)	dns	4555
18	07:24:59:6361 CST	57	192.168.200.12	192.168.200.51	UDP	dns : client query (Standard)	1183	dns
19	07:24:59:6627 CST	71	192.168.1.100	192.168.0.254	UDP	dns : client query (Standard)	2543	dns
20	07:24:59:7416 CST	178	192.168.0.254	192.168.1.100	UDP	dns : server response (Name Error)	dns	2543
21	07:24:59:8666 CST	72	192.168.200.12	192.168.200.51	UDP	dns : client query (Standard)	1187	dns
22	07:25:00:1717 CST	72	192.168.1.108	192.168.0.254	UDP	dns : client query (Standard)	1274	dns
23	07:25:00:2506 CST	72	192.168.0.254	192.168.1.108	UDP	dns : server response (Server Failure)	dns	1274
24	07:25:01:8321 CST	70	192.168.200.51	192.168.200.12	UDP	dns : server response (Server Failure)	dns	1173



# **DNS Response: Name Error**



```
Packet Details
Packet ID : 2
Time: 4/1/2003 07:24:50:3867 CST
Link Header :
Source Mac : 00:20:78:D9:0D:DB
                                  Remote Mac : 00:D0:59:AA:AF:80
ETHERTYPE : IP (0x800)
IP Version 4
Header Length : 20
Source : 192.168.0.254 Remote : 192.168.1.100
Protocol : UDP
Datagram Length : 179
ID : 0xB998 (47512)
Flags :
            Fragment Offset : 0
Time to live : 64
Header checksum : 0x3CEF
UDP Header Info
Source Port : 53 dns Remote Port : 2541 2541
DNS Header
DNS Message ID : 31
Type : Response(Name Error)
Flags : AA RD RA
Request address of following names
  109.1.168.192.in-addr.arpa
```

#### Flags:

AA Authoritative Answer – response came from an authoritative server for the domain name

RD Recursion Desired

RA Recursion Available on this server



# **DHCP**



- UDP Port 67 Server daemon
- UDP Port 68 Client process
- Transaction ID keeping track of responses and requests
- DHCP Message Types:
  - DHCP Discover
  - DHCP Offer
  - 3. DHCP Request
  - 4. DHCP Decline
  - 5. DHCP Acknowledgement
  - DHCP Negative Acknowledgement
  - 7. DHCP Release
  - DHCP Informational



#### **DHCP Decline**



Packet Summary

ID	Timestamp	Datagram Size	Local IP	Rmt. IP	Protocol	Messages	Local Port	Rmt. Port
1	17:25:03:7104 CST	328	0.0.0.0	255.255.255.255	UDP	dhcp : client request: discover find DHCP servers	bootpc	bootps
2	17:25:03:7241 CST	328	192.168.0.1	255.255.255.255	UDP	dhcp : server reply: offering ip address 192.168.0.104	bootps	bootpc
3	17:25:03:7299 CST	342	0.0.0.0	255.255.255.255	UDP	dhcp : client request: request new ip address	bootpc	bootps
4	17:25:03:7368 CST	342	192.168.0.1	255.255.255.255	UDP	dhcp: server reply: ACK use of 192.168.0.104 (ok to use)	bootps	bootpc
5	17:25:04:6489 CST	328	0.0.0.0	255.255.255.255	UDP	dhcp : client request: decline use of 192.168.0.104 (already in use)	bootpc	bootps

## DHCP Discover (Msg Type 1) -> Offer (2) -> Request (3) -> Ack (5) -> Decline (4)

```
UDP Header Info
Source Port : 68 bootpc
                           Remote Port : 67 bootps
DHCP : CLIENT REQUEST
      Hardware Type - Ethernet
      Hardware Address Length - 6
       Hops - 0
      Transaction ID - 0xED63F236
      Elapse Seconds - 3328
      Flags - broadcast
      Client IP - 192.168.0.104
      Your (client) IP - 0.0.0.0
      Next server IP - 0.0.0.0
       Relay Agent IP - 0.0.0.0
      Client MAC Address - 00:1B:9E:70:10:42
       Server host name - not provided
       Boot file name - not provided
DHCP Options:
       DHCP Message - dhcp decline
       DHCP client-identifier
           Hardware type: Ethernet (10Mb)
           Client address: 00:1B:9E:70:10:42
       DHCP requested IP address = 192.168.0.104
       server identifier = 192.168.0.1
       End Option
```

All 5 packets have the same Transaction ID



Padding

## **FTP**



Query Builder Packet Summary Packet Details Sequence of Execution Response Time Summary Exception Report

	et Summary	Datagram							Con	Ack.	Window
ID	Timestamp	Size	Local IP	Rmt. IP	Protocol	Messages	Local Port	Rmt. Port	Seq. Number	Number	Size
1	02:35:10:5649 G	MT 78	137.72.43.45	137.72.43.255	UDP		137	137			
2	02:35:11:2518 G	MT 1500	137.72.43.207	137.72.43.142	TCP	ACK : telnet : tn3270e data header	telnet	1215	424249748	4206849998	32760
3	02:35:11:2688 G	MT 136	137.72.43.207	137.72.43.142	TCP	ACK PSH : telnet : 96 bytes of telnet data	telnet	1215	424251208	4206849998	32760
4	02:35:11:2712 G	MT 40	137.72.43.142	137.72.43.207	TCP	ACK	1215	telnet	4206849998	424251304	63748
5	02:35:11:2713 G	MT 40	137.72.43.142	137.72.43.207	TCP	ACK	1215	telnet	4206849998	424251304	64240
6	02:35:11:2775 G	MT 78	137.72.43.45	137.72.43.255	UDP		137	137			
7	02:35:11:6239 G	VIT 71	137.72.43.207	137.72.43.207	UDP	SNMP : Community - public(v1) : pdu -	14280	snmp ctrl			
8	02:35:11:6245 G	MT 56	137.72.43.207	137.72.43.207	ICMP	Destination Unreachable : Port unreachable	0	0			
9	02:35:12:0784 G	MT 48	137.72.43.142	137.72.43.207	TCP	ACK PSH : telnet : tn3270e data header	1215	telnet	4206849998	424251304	64240
10	02:35:12:0791 G	MT 40	137.72.43.207	137.72.43.142	TCP	ACK PSH	telnet	1215	424251304	4206850006	32760
11	02:35:12:7799 G	MT 1453	137.72.43.143	137.72.43.255	UDP		6646	6646			
12	02:35:12:7813 G	MT 1453	137.72.43.142	137.72.43.255	UDP		6646	6646			
13	02:35:13:7644 G	MT 52	137.72.43.137	137.72.43.207	TCP	SYN	10432	ftp control	1257181311	0	65535
14	02:35:13:7650 G	MT 48	137.72.43.207	137.72.43.137	TCP	ACK SYN	ftp control	10432	452077195	1257181312	32768
15	02:35:13:7659 G	MT 40	137.72.43.137	137.72.43.207	TCP	ACK	10432	ftp control	1257181312	452077196	64240
16	02:35:13:8898 G	VIT 114	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 220	ftp control	10432	452077196	1257181312	32768
17	02:35:13:9114 G	MT 1453	137.72.43.108	137.72.43.255	UDP		6646	6646			
18	02:35:14:0430 G	MT 40	137.72.43.137	137.72.43.207	TCP	ACK	10432	ftp control	1257181312	452077270	64221
19	02:35:14:0435 G	VIT 74	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 220	ftp control	10432	452077270	1257181312	32768
20	02:35:14:2617 G	MT 40	137.72.43.137	137.72.43.207	TCP	ACK	10432	ftp control	1257181312	452077304	64213
21	02:35:14:3524 G	VIT 71	137.72.43.207	137.72.43.207	UDP	SNMP : Community - public(v1) : pdu - GetRequest	14278	snmp ctrl			
22	02:35:14:3531 G	MT 56	137.72.43.207	137.72.43.207	ICMP	Destination Unreachable : Port unreachable	0	0			
23	02:35:16:7560 G	MT 71	137.72.43.207	137.72.43.207	UDP	SNMP : Community - public(v1) : pdu -	14282	snmp ctrl			
24	02:35:16:7567 G	MT 56	137.72.43.207	137.72.43.207	ICMP	Destination Unreachable : Port unreachable	0	0			
25	02:35:18:1661 G	MT 54	137.72.43.137	137.72.43.207	TCP	ACK PSH : ftp command USER	10432	ftp control	1257181312	452077304	64213



# FTP Analysis – zoom in on FTP ports: Control connection vs. Data connection



Traces Query Builder Packet Summary Packet Details Sequence of Execution Response Time Summary Exception Report

Pac	ket	Su	mm	an	/-
-----	-----	----	----	----	----

ID	Timestamp	Datagram Size	Local IP	Rmt. IP	Protocol	Messages	Local Port	Rmt. Port	Seq. Number	Ack. Number	Window Size
13	02:35:13:7644 GMT	52	137.72.43.137	137.72.43.207	TCP	SYN	10432	ftp control	1257181311	0	65535
14	02:35:13:7650 GMT	48	137.72.43.207	137.72.43.137	TCP	ACK SYN	ftp control	10432	452077195	1257181312	32768
15	02:35:13:7659 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	10432	ftp control	1257181312	452077196	64240
16	02:35:13:8898 GMT	114	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 220	ftp control	10432	452077196	1257181312	32768
18	02:35:14:0430 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	10432	ftp control	1257181312	452077270	64221
19	02:35:14:0435 GMT	74	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 220	ftp control	10432	452077270	1257181312	32768
20	02:35:14:2617 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	10432	ftp control	1257181312	452077304	64213
25	02:35:18:1661 GMT	54	137.72.43.137	137.72.43.207	TCP	ACK PSH : ftp command USER	10432	ftp control	1257181312	452077304	64213
26	02:35:18:1790 GMT	67	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 331	ftp control	10432	452077304	1257181326	32754
27	02:35:18:3075 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	10432	ftp control	1257181326	452077331	64206
33	02:35:20:6157 GMT	55	137.72.43.137	137.72.43.207	TCP	ACK PSH : ftp command PASS	10432	ftp control	1257181326	452077331	64206
34	02:35:20:8732 GMT	40	137.72.43.207	137.72.43.137	TCP	ACK PSH	ftp control	10432	452077331	1257181341	32753
36	02:35:21:3641 GMT	101	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 230	ftp control	10432	452077331	1257181341	32753
37	02:35:21:4799 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	10432	ftp control	1257181341	452077392	64191
41	02:35:23:5899 GMT	48	137.72.43.137	137.72.43.207	TCP	ACK PSH : ftp command TYPE	10432	ftp control	1257181341	452077392	64191
42	02:35:23:5935 GMT	83	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 200	ftp control	10432	452077392	1257181349	32760
43	02:35:23:7760 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	10432	ftp control	1257181349	452077435	64180
61	02:35:29:5343 GMT	67	137.72.43.137	137.72.43.207	TCP	ACK PSH : ftp command PORT	10432	ftp control	1257181349	452077435	64180
62	02:35:29:5379 GMT	√ 62	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 200	ftp control	10432	452077435	1257181376	32741
65	02:35:30:3898 GMT	62	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 200	ftp control	10432	452077435	1257181376	32741
68	02:35:32:1407 GMT	62	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 200	ftp control	10432	452077435	1257181376	32741
74	02:35:35:5118 GMT	62	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 200	ftp control	10432	452077435	1257181376	32741
75	02:35:42:2300 GMT	62	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 200	ftp control	10432	452077435	1257181376	32741
99	02:35:55:6398 GMT	62	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 200	ftp control	10432	452077435	1257181376	32741
166	02:36:22:7005 GMT	62	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 200	ftp control	10432	452077435	1257181376	32741
257	02:37:16:9704 GMT	62	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 200	ftp control	10432	452077435	1257181376	32741

# FTP Analysis - PORT command



```
Query Builder
              Packet Summary Packet Details | Sequence of Execution | Response Time Summary | Exception Report
Packet Details
Packet Details
                 Hex Decode
Packet Details
 Packet ID : 61
 Time : 2/28/2009 02:35:29:5343 GMT
 CTE Format IR : IPv4/6 Packet Trace (PTHIdPkt) (4)
 PTHDR T Header
 Device Type : Ethernet
 Link Name : ETH1
 Flags : Record Size adjust by +1
         IP packet was received
 IP Packet Length : 67 bytes
 IP Source: 137.72.43.137
                             IP Remote: 137.72.43.207
 Source Port: 10432 Remote Port: 21
 TCB Address : 0x0
 ASID
      : 0x35
 Trace Count : 191128
 IP Version 4
 Source : 137.72.43.137 Remote : 137.72.43.207
 Protocol : TCP
 Datagram Length : 67
 Flags : Don't Fragment
                            Fragment Offset : 0
 TCP Header Info
 Source Port : 10432
                       Remote Port : 21 ftp control
Seq. Number : 1257181349 Ack. Number : 452077435
 Window: 64180 Flags: ACK PSH
 FTP Data
 Command : PORT
 Parameters: 137,72,43,137,40,196
```





# FTP Analysis – PORT command continued

PORT 137,72,43,137,40,196

- Specifies that the FTP Server will initiate the data connection
- Client's IP Address: 137.72.43.137
- Client's Port: 40 \* 256 + 196 = 10436
- Expect to see a SYN packet:
  - from server (137.72.43.207)
  - to client (137.72.43.137)



# FTP Analysis – check the equivalent Sniffer trace



Traces	Query Builder	Packet Summary	Packet Details	Sequence of Execution	Response Time Summary	Exception Report
--------	---------------	----------------	----------------	-----------------------	-----------------------	------------------

#### Packet Summary

ID	Timestamp	Datagram Size	Local IP	Rmt. IP	Protocol	Messages	Local Port	Rmt. Port	Seq. Number	Ack. Number	Window Size
10	02:42:00:5115 GMT	52	137.72.43.137	137.72.43.207	TCP	SYN	10432	ftp control	1257181311	0	65535
11	02:42:00:5130 GMT	48	137.72.43.207	137.72.43.137	TCP	ACK SYN	ftp control	10432	452077195	1257181312	32768
12	02:42:00:5130 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	10432	ftp control	1257181312	452077196	64240
13	02:42:00:6380 GMT	114	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 220	ftp control	10432	452077196	1257181312	32768
14	02:42:00:7886 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	10432	ftp control	1257181312	452077270	64221
15	02:42:00:7916 GMT	74	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 220	ftp control	10432	452077270	1257181312	32768
16	02:42:01:0073 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	10432	ftp control	1257181312	452077304	64213
17	02:42:04:9129 GMT	54	137.72.43.137	137.72.43.207	TCP	ACK PSH : ftp command USER	10432	ftp control	1257181312	452077304	64213
18	02:42:04:9278 GMT	67	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 331	ftp control	10432	452077304	1257181326	32754
19	02:42:05:0542 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	10432	ftp control	1257181326	452077331	64206
20	02:42:07:3607 GMT	55	137.72.43.137	137.72.43.207	TCP	ACK PSH : ftp command PASS	10432	ftp control	1257181326	452077331	64206
21	02:42:07:6216 GMT	40	137.72.43.207	137.72.43.137	TCP	ACK PSH	ftp control	10432	452077331	1257181341	32753
22	02:42:08:1125 GMT	101	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 230	ftp control	10432	452077331	1257181341	32753
23	02:42:08:2261 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	10432	ftp control	1257181341	452077392	64191
24	02:42:10:3368 GMT	48	137.72.43.137	137.72.43.207	TCP	ACK PSH : ftp command TYPE	10432	ftp control	1257181341	452077392	64191
25	02:42:10:3419 GMT	83	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 200	ftp control	10432	452077392	1257181349	32760
26	02:42:10:5229 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	10432	ftp control	1257181349	452077435	64180
30	02:42:16:2812 GMT	67	137.72.43.137	137.72.43.207	TCP	ACK PSH : ftp command PORT	10432	ftp control	1257181349	452077435	64180
31	02:42:16:2865 GMT	62	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 200	ftp control	10432	452077435	1257181376	32741





# **FTP Analysis**

Sniffer trace shows the PORT command was sent to the server but there was no SYN packet coming in – SYN packet was "lost"

Might be related to firewall issues - check firewall setting, FTP.DATA and TCP PROFILE settings.

#### Passive FTP:

- Client initiates the data connection.
- Check the reply to the PASV command to determine the IP address and Port number of the server for the data connection.





# FTP Analysis – Passive FTP

Traces Query Builder Packet Summary Packet Details Sequence of Execution Response Time Summary Exception Report

Pac	ket	Summary	1-
rac	ĸе	: Summary	1-

ID	Timestamp	Datagram Size	Local IP	Rmt. IP	Protocol	Messages	Local Port	Rmt. Port	Seq. Number	Ack. Number	Window Size
730	02:42:16:2097 GMT	48	137.72.43.137	137.72.43.207	TCP	ACK PSH : ftp command TYPE	21157	ftp control	3883430947	617330248	64154
731	02:42:16:2136 GMT	83	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 200	ftp control	21157	617330248	3883430955	32760
732	02:42:16:2142 GMT	46	137.72.43.137	137.72.43.207	TCP	ACK PSH : ftp command PASV	21157	ftp control	3883430955	617330291	64143
733	02:42:16:2207 GMT	89	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 227	ftp control	21157	617330291	3883430961	32762
734	02:42:16:2223 GMT	46	137.72.43.137	137.72.43.207	TCP	ACK PSH : ftp command LIST	21157	ftp control	3883430961	617330340	64131
735	02:42:16:2234 GMT	52	137.72.43.137	137.72.43.207	TCP	SYN	21158	3679	3534575276	0	65535
736	02:42:16:2331 GMT	48	137.72.43.207	137.72.43.137	TCP	ACK SYN	3679	21158	617396255	3534575277	32768
737	02:42:16:2331 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	21158	3679	3534575277	617396256	64240
738	02:42:16:2799 GMT	61	137.72.43.207	137.72.43.137	TCP	ACK PSH : ftp reply code 125	ftp control	21157	617330340	3883430967	32762
739	02:42:16:4079 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	21157	ftp control	3883430967	617330361	64126
740	02:42:16:4465 GMT	1500	137.72.43.207	137.72.43.137	TCP	ACK	3679	21158	617396256	3534575277	32768
741	02:42:16:4467 GMT	1457	137.72.43.207	137.72.43.137	TCP	ACK PSH	3679	21158	617397716	3534575277	32768
742	02, 2:16:4468 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	21158	3679	3534575277	617399133	63520
743	02:42:16:4468 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	21158	3679	3534575277	617399133	64240
744	02:42:16:4491 GMT	40	137.72.43.207	137.72.43.137	TCP	ACK PSH FIN	3679	21158	617399133	3534575277	32768
745	02:42:16:4493 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK	21158	3679	3534575277	617399134	64240
746	02:42:16:4495 GMT	40	137.72.43.137	137.72.43.207	TCP	ACK FIN	21158	3679	3534575277	617399134	64240
747	02:42:16:4524 GMT	40	137.72.43.207	137.72.43.137	TCP	ACK PSH	3679	21158	617399134	3534575278	32768




# FTP Analysis – PASV Reply



Query Builder Packet Summary Packet Details | Sequence of Execution | Response Time Summary | Exception Report Packet Details Packet Details Hex Decode **Packet Details** Packet ID : 733 Time : 3/3/2009 02:42:16:2207 GMT Header : Source Mac : 00:10:C6:DF:BA:CF Remote Mac : 00:13:20:D5:77:94 ETHERTYPE : IP (0x800) IP Version 4 Source : 137.72.43.207 Remote : 137.72.43.137 Protocol : TCP Datagram Length : 89 Flags: Fragment Offset: 0 TCP Header Info Source Port : 21 ftp control Remote Port : 21157 Client will connect to the Server Port Seg. Number: 617330291 Ack. Number: 3883430961 Window: 32762 Flags: ACK PSH 3679 for data connection: Server IP = 1377243207FTP Data Server Port = 14 \* 256 + 95 = 3679Reply Code : 227 (Entering Passive Mode) Message : Entering Passive Mode (137,72,43,207,14,95)




#### FTP Brute Force Attack — over 460 attempts within 21 seconds

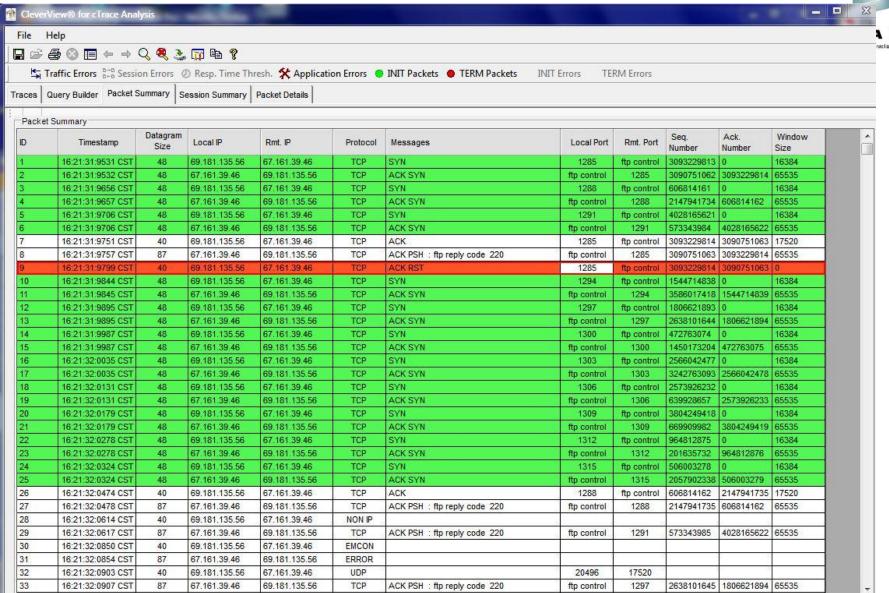

Copyright © 2012 Applied Expert Systems, Inc.




#### FTP Brute Force Attack — Zoom in on FTP Control Sessions

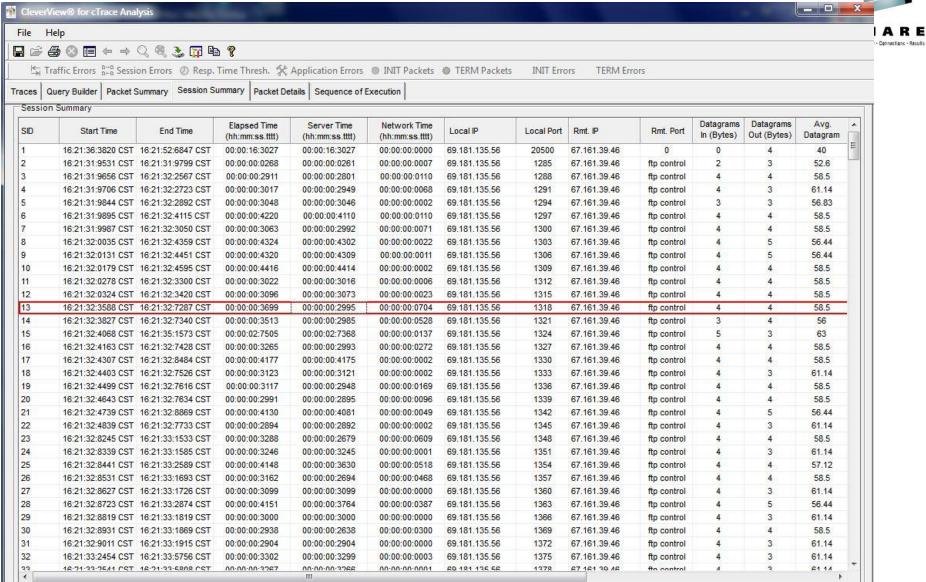

SHARE in Anaheim

#### FTP Brute Force Attack — Check FTP Commands and Replies




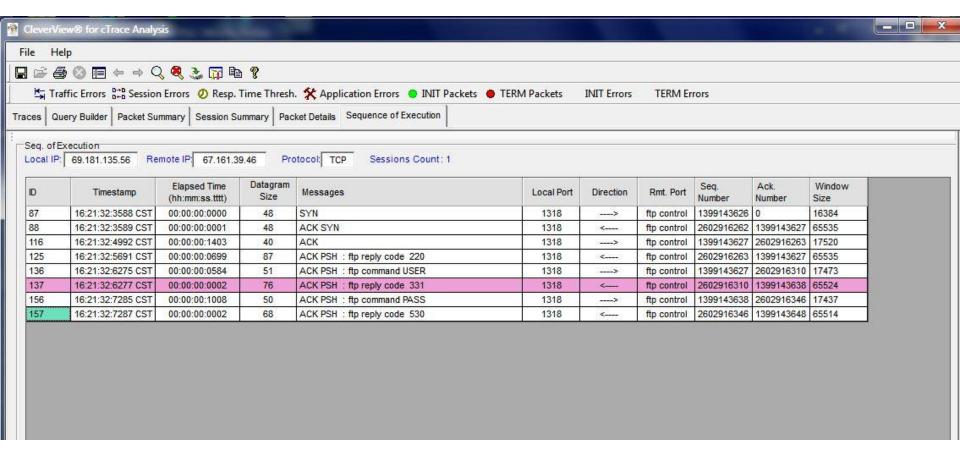




## FTP Brute Force Attack — Check PASS Command Packet Details



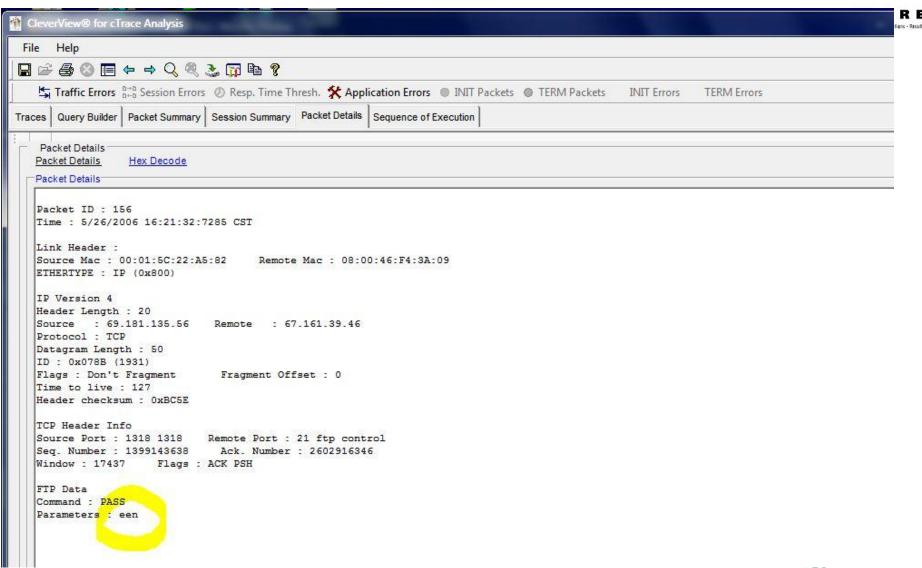

## **Proactively Monitoring for FTP Server Logon Failures**



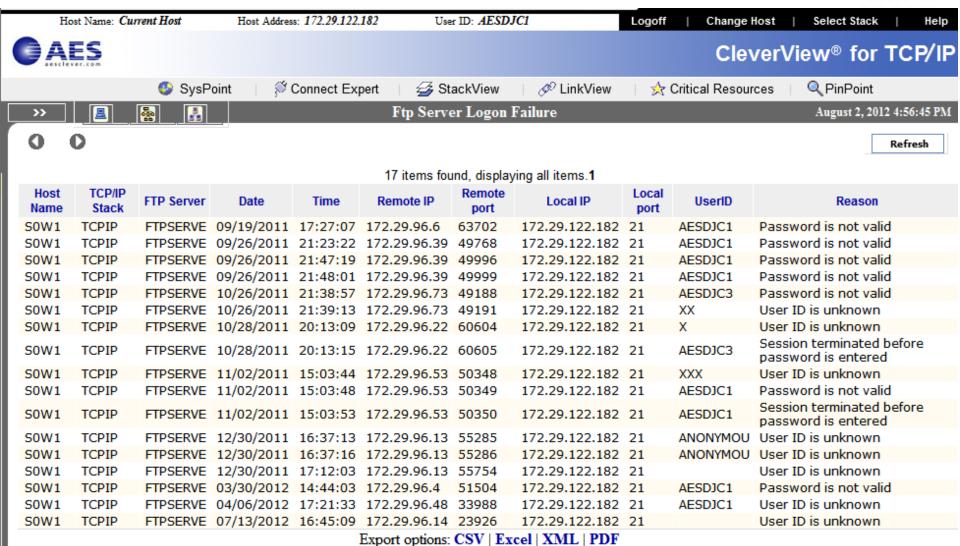

Copyright © 2012 Applied Expert Systems, Inc.








- Transport Layer Security provides security for communications over networks by encrypting the segments at the transport layer end to end.
- TLS V1.0 (RFC 2246) is based on SSL V3.0.
- It does not require the client and the server to arrange for a secret key to be exchanged before the transaction.
  - Asymmetric keys (public/private) for handshaking and secret key exchange.
  - Secret key (symmetric) mechanism for subsequent communication.

# TLS/SSL, AT-TLS – Secret Key (Symmetric)



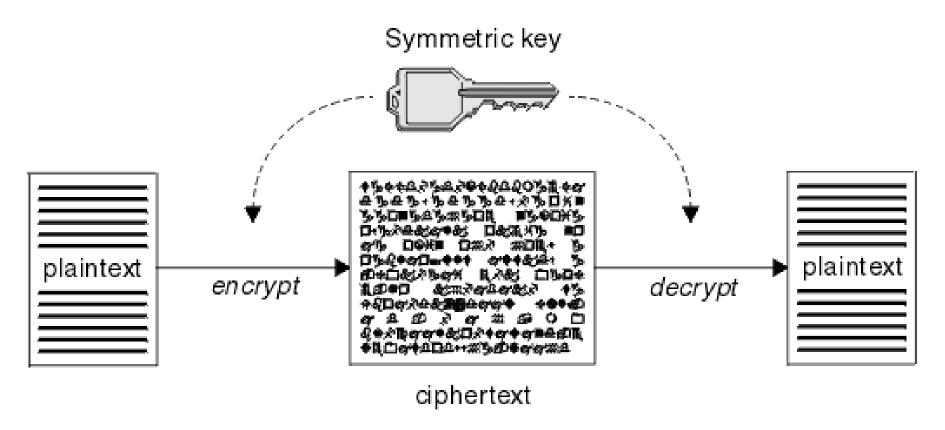

Source: http://middleware.its.state.nc.us/middleware/Documentation/en\_US/htm/csqzas00/csq01skc.gif




## TLS/SSL, AT-TLS – Public/Private Keys



#### ASYMMETRIC ENCRYPTION



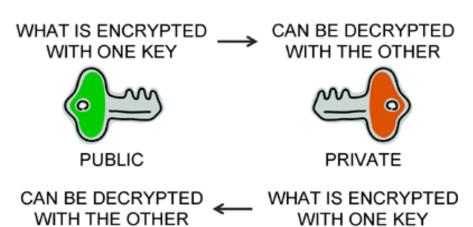

Source: http://www.teracomtraining.com/tutorials/teracom-tutorial-asymmetric-encryption.gif



#### **TLS/SSL Basic Flow**



- Negotiate cipher suites and compression algorithms.
- Authenticate the server (and optionally the client) through certificates and public/private keys.
- Server -> Client: The server uses its private key to encrypt and the client uses the public key to decrypt.
- Client -> Server: the client uses the public key to encrypt and the server uses its private key to decrypt.
- Exchange random numbers and a pre-master secret, which is used with other data to create a shared secret key – the
   Master Secret is used to encrypt/decrypt the data.



#### TLS/SSL Handshake – Server Authentication



Client Server

**Client Hello** 

Server Hello Certificate Server Done

Client Key Exchange Change Cipher Spec Finished

**Change Cipher Spec Finished** 

#### Hello

Highest SSL/TLS version supported Ciphers and Compression Method Session ID

Random data for key generation

#### Certificate:

Server Certificate – contains server's public key.

#### **Client Key Exchange**

Premaster secret encrypted by server's public key. Both the client and the server generate the Master Secret key (symmetric) on their own using the premaster secret and the random data that is generated from the SERVER\_HELLO and CLIENT HELLO commands.


#### **Change Cipher Spec**

Indicates that all subsequent data will be encrypted.




## **AT-TLS Flow**



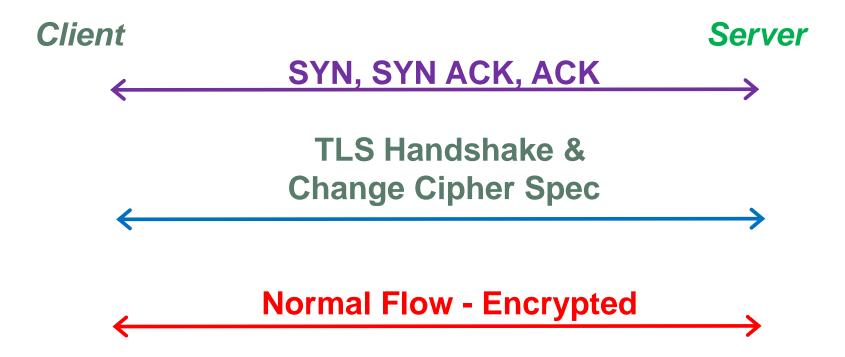

## FTPS - FTP w/SSL Control Connection



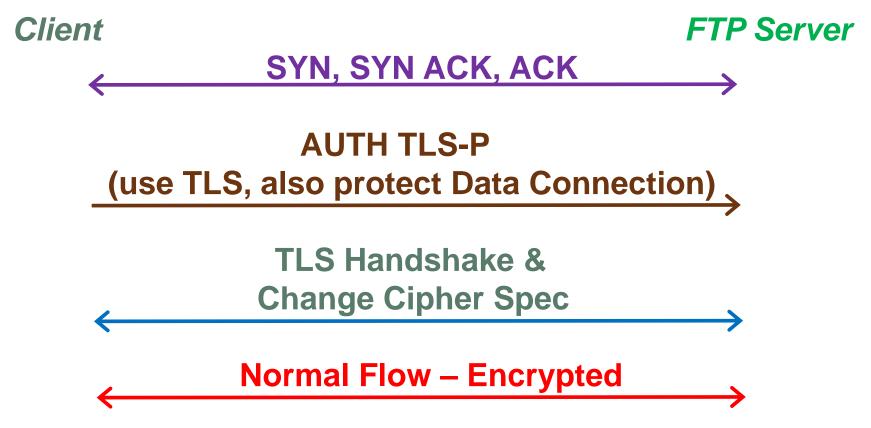



# HTTPS (Port 443)



leve	rView® for cTrace A	nalysis									
H	Help										
		N 60 N									
		4 4 3	TO ER &								
5	Fraffic Errors \$\begin{array}{c} \$b \to 0 \\ 0 \to 0 \end{array}\$ Session	Errors Ø P	Resp. Time Thresh.	* Application Err	ors 🦁 INIT I	Packets • TERM Packets INIT Errors TERM	1 Errors				
٠. ا	Query Builder Packet Su	mmary									
62	Query Dulluer 1 deket 50	animai y									
acket	Summary										
	- January	Datagram		T -			1		Con	Ack.	Window
D	Timestamp	Size	Local IP	Rmt. IP	Protocol	Messages	Local Port	Rmt. Port	Seq. Number	Number	Size
2	18:36:09:5954 EST	52	137.72.43.113	161.113.0.6	TCP	SYN	53755	https	373845382	0	8192
3	18:36:09:6604 EST	52	161.113.0.6	137.72.43.113	TCP	ACK SYN	https	53755	3140938962	373845383	4380
4	18:36:09:6606 EST	40	137.72.43.113	161.113.0.6	TCP	ACK	53755	https	373845383	3140938963	16588
5	18:36:09:6685 EST	238	137.72.43.113	161.113.0.6	TCP	TLS: Client Hello	53755	https	373845383	3140938963	16588
3	18:36:09:7484 EST	1316	161.113.0.6	137.72.43.113	TCP	TLS: Server Hello, Certificate	https	53755	3140938963	373845581	4380
7	18:36:09:7552 EST	1316	161.113.0.6	137.72.43.113	TCP	ACK	https	53755	3140940239	373845581	4380
3	18:36:09:7552 EST	40	137.72.43.113	161.113.0.6	TCP	ACK	53755	https	373845581	3140941515	16588
9	18:36:09:7622 EST	1316	161.113.0.6	137.72.43.113	TCP	ACK	https	53755	3140941515	373845581	4380
)	18:36:09:7657 EST	733	161.113.0.6	137.72.43.113	TCP	TLS: Server Hello Done	https	53755	3140942791	373845581	4380
1	18:36:09:7658 EST	40	137.72.43.113	161.113.0.6	TCP	ACK	53755	https	373845581	3140943484	16588
2	18:36:09:7718 EST	222	137.72.43.113	161.113.0.6	TCP	TLS: Client Key Exchange, Change Cipher Spec,	53755	https	373845581	3140943484	16588
3	18:36:09:8372 EST	40	161.113.0.6	137.72.43.113	TCP	ACK	https	53755	3140943484	373845763	4760
4	18:36:09:8424 EST	83	161.113.0.6	137.72.43.113	TCP	TLS: Change Cipher Spec, Encrypted Data	https	53755	3140943484	373845763	4760
5	18:36:09:8437 EST	879	137.72.43.113	161.113.0.6	TCP	TLS: Application	53755	https	373845763	3140943527	16577
3	18:36:09:9180 EST	40	161.113.0.6	137.72.43.113	TCP	ACK	https	53755	3140943527	373846602	5599
7.	18:36:09:9508 EST	1316	161.113.0.6	137.72.43.113	TCP	TLS: Application	https	53755	3140943527	373846602	5599
3	18:36:09:9576 EST	1316	161.113.0.6	137.72.43.113	TCP	TLS: Application	https	53755	3140944803	373846602	5599
9	18:36:09:9577 EST	40	137.72.43.113	161.113.0.6	TCP	ACK	53755	https	373846602	3140946079	16588
)	18:36:09:9648 EST	1316	161.113.0.6	137.72.43.113	TCP	TLS: Application	https	53755	3140946079	373846602	5599
1	18:36:09:9716 EST	1316	161.113.0.6	137.72.43.113	TCP	TLS: Application	https	53755	3140947355	373846602	5599
2	18:36:09:9717 EST	40	137.72.43.113	161.113.0.6	TCP	ACK	53755	https	373846602	3140948631	16588
3	18:36:09:9787 EST	1316	161.113.0.6	137.72.43.113	TCP	TLS: Application	https	53755	3140948631	373846602	5599
4	18:36:09:9855 EST	1316	161.113.0.6	137.72.43.113	TCP	TLS: Application	https	53755	3140949907	373846602	5599
5	18:36:09:9856 EST	40	137.72.43.113	161.113.0.6	TCP	ACK	53755	https	373846602	3140951183	16588
6	18:36:09:9925 EST	1316	161.113.0.6	137.72.43.113	TCP	TLS: Application	https	53755	3140951183	373846602	5599


Copyright © 2012 Applied Expert Systems, Inc.



## AT-TLS - FTP w/SSL





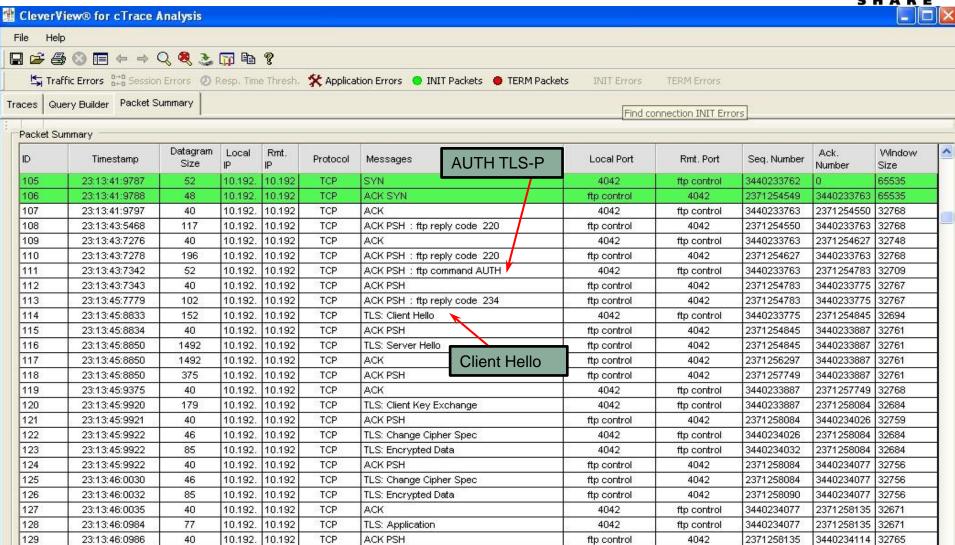

Copyright © 2012 Applied Expert Systems, Inc.

ftp control



3440234114 32765

2371258135

4042

130

10.192. 10.192

TCP

TLS: Application

109

23:13:46:0991

## **TLS Header**



Offset	Length	Description	Decimal	Meaning
			Value	
0	1	Content Type	20 (0x14)	Change Cipher Spec
			21 (0x15)	Alert
			22 (0x16)	Handshake
			23 (0x17)	Application
1	2	Version		
1	1	Major Version	3	
2	1	Minor Version	0	SSLv3
			1	TLS 1.0
			2	TLS 1.1
			3	TLS 1.2
3	2	Length	N	The length of the Protocol Message
5	N	Protocol Message		

# Sample TLS/SSL Decoding



```
Hex Data:
```

16 03 01 00 C1 01 00 00 BD 03 01 4B 71 F1 69 DA 10 ....

Secure Socket Layer

TLSv1 Record Layer: Handshake Protocol: Client Hello

Content Type: Handshake (22) Version: TLS 1.0 (0x0301)

Length: 193

Handshake Protocol: Client Hello Handshake Type: Client Hello (1)

Length: 189

Version: TLS 1.0 (0x0301)

Random

GMT Unix Time: Feb 9, 2010 15:36:09:0000000000

Random Bytes: DA10 ... -

Session ID Length: 32

Session ID: 2D585DAEF198D9BB951DD9F58D7766465B88A493B98ACC3C...

Cipher Suites Length: 70 Cipher Suites (35 suites)

Cipher Suite: TLS\_ECDHE\_ECDSA\_WITH\_AES\_256\_CBC\_SHA Cipher Suite: TLS\_ECDHE\_RSA\_WITH\_AES\_256\_CBC\_SHA

Cipher Suite: ......


28 Random Bytes - to be used with the premaster secret to generate the symmetric key.

Ciphers are listed in order of preference – from the strongest to the weakest



## **Sample Digital Certificate**



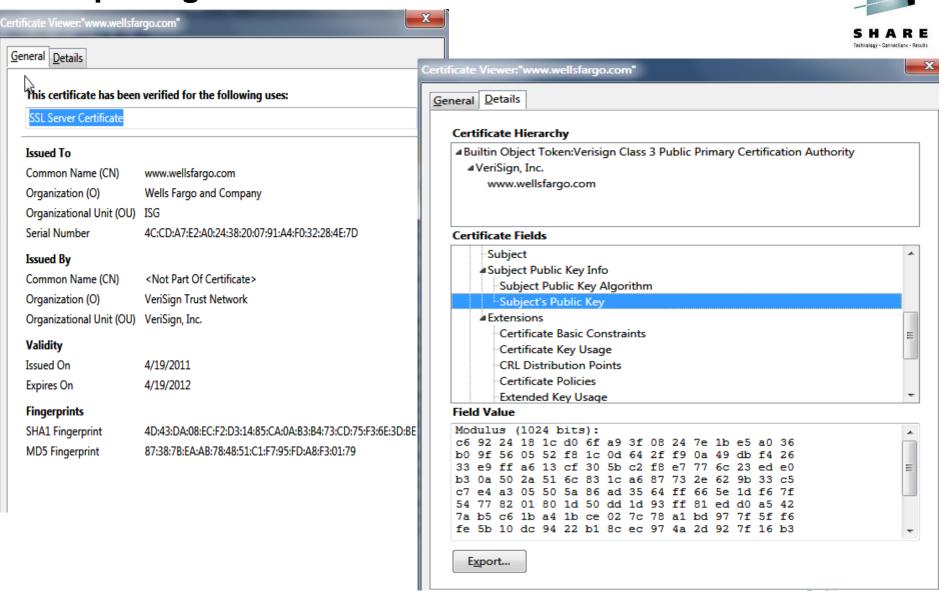

Copyright © 2012 Applied Expert Systems, Inc.





# **AT-TLS Data Decryption**

- AT-TLS data is always encrypted in the packet trace. By default, Data Trace does not show unencrypted AT-TLS data either for security reason.
- However, user can configure AT-TLS policy to turn on the CtraceClearText parameter to trace the unencrypted application data.

