





Dave Herr <u>dherr@us.ibm.com</u>
Pam McLean <u>pamm@us.ibm.com</u>

IBM Corporation Raleigh, NC USA

Monday, March 10, 2013: 03:00 PM-04:00 PM Session: 14872







Trademarks, notices, and disclaimers

The following terms are trademarks or registered trademarks of International Business Machines Corporation in the United States or other countries or both:

 Advanced Peer-to-Peer Networking®

AIX®

alphaWorks®

AnyNet®

AS/400®BladeCenter®

Candle®

Candle
 CICS®

DataPower®

DB2 Connect

DB2®DRDA®

· e-business on demand®

· e-business (logo)

• e business(logo)®

ESCON®FICON®

 Geographically Dispersed Parallel Sysplex

HiperSockets

GDDM®

GDPS®

HPR Channel Connectivity

HyperSwapi5/OS (logo)i5/OS®IBM eServer

IBM (logo)®
 IBM®

IBM zEnterprise™ System

IMS

InfiniBand ®IP PrintWay

IPDSiSeriesLANDP®

Language Environment®

MQSeries®

MVS

NetView®OMEGAMON®

Open Power

OpenPower

Operating System/2®Operating System/400®

OS/2®OS/390®OS/400®

Parallel Sysplex®

POWER®POWER7®PowerVMPR/SM

pSeries®RACF®

Rational Suite®

Rational®Redbooks

Redbooks (logo)Sysplex Timer®

System i5System p5

System x®System z®

System z9®System z10Tivoli (logo)®

Tivoli®

VTAM®WebSphere®

xSeries®z9®z10 BCz10 EC

· zEnterprise

zSeries®

z/Architecture

z/OS®

• z/VM®

z/VSE

* All other products may be trademarks or registered trademarks of their respective companies.

The following terms are trademarks or registered trademarks of International Business Machines Corporation in the United States or other countries or both:

- Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.
- Cell Broadband Engine is a trademark of Sony Computer Entertainment. Inc. in the United States, other countries, or both and is used under license there from.
- Java and all Java-based trademarks are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both.
- Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.
- InfiniBand is a trademark and service mark of the InfiniBand Trade Association.
- Intel, Intel logo, Intel Inside, Intel Inside logo, Intel Centrino, Intel Centrino logo, Celeron, Intel Xeon, Intel SpeedStep, Itanium, and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.
- UNIX is a registered trademark of The Open Group in the United States and other countries.
- · Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.
- ITIL is a registered trademark, and a registered community trademark of the Office of Government Commerce, and is registered in the U.S. Patent and Trademark Office.
- IT Infrastructure Library is a registered trademark of the Central Computer and Telecommunications Agency, which is now part of the Office of Government Commerce.

Notes:

- Performance is in Internal Throughput Rate (ITR) ratio based on measurements and projections using standard IBM benchmarks in a controlled environment. The actual throughput that any user will experience will vary depending upon considerations such as the amount of multiprogramming in the user's job stream, the I/O configuration, the storage configuration, and the workload processed. Therefore, no assurance can be given that an individual user will achieve throughput improvements equivalent to the performance ratios stated here.
- IBM hardware products are manufactured from new parts, or new and serviceable used parts. Regardless, our warranty terms apply.
- All customer examples cited or described in this presentation are presented as illustrations of the manner in which some customers have used IBM products and the results they may have achieved. Actual environmental costs and performance characteristics will vary depending on individual customer configurations and conditions.
- This publication was produced in the United States. IBM may not offer the products, services or features discussed in this document in other countries, and the information may be subject to change without notice. Consult your local IBM business contact for information on the product or services available in your area.
- · All statements regarding IBM's future direction and intent are subject to change or withdrawal without notice, and represent goals and objectives only.
- Information about non-IBM products is obtained from the manufacturers of those products or their published announcements. IBM has not tested those products and cannot confirm the performance, compatibility, or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.
- Prices subject to change without notice. Contact your IBM representative or Business Partner for the most current pricing in your geography.

Refer to www.ibm.com/legal/us for further legal information.

Agenda

- Sysplex Distributor How is workload distributed? What are the varying distribution methods and factors that comprise the load balancing decision?
- Monitoring workload distribution, detecting problems and anomalies
- Overview of NetView for z/OS DVIPA management/monitoring features
- How can NetView for z/OS helps with specific Sysplex Distributor workload balancing problem scenarios


Disclaimer: All statements regarding IBM future direction or intent, including current product plans, are subject to change or withdrawal without notice and represent goals and objectives only. All information is provided for informational purposes only, on an "as is" basis, without warranty of any kind.

© 2014 SHARE and IBM Corporation



The network view of a Parallel Sysplex - a single large server with many network interfaces and many application services

- The promises of the Parallel Sysplex cluster environment are:
 - Application location independence
 - Ability to shift application workload between LPARs
 - Application single system image from the network
 - Application capacity on-demand
 - Component failure does not lead to application failure
- Gaining the benefits, depend on:
 - Carefully designed redundancy of all key hardware and software components in symmetric configurations
 - Supporting functions in z/OS and middleware
 - Cooperation by applications
 - Operations procedures

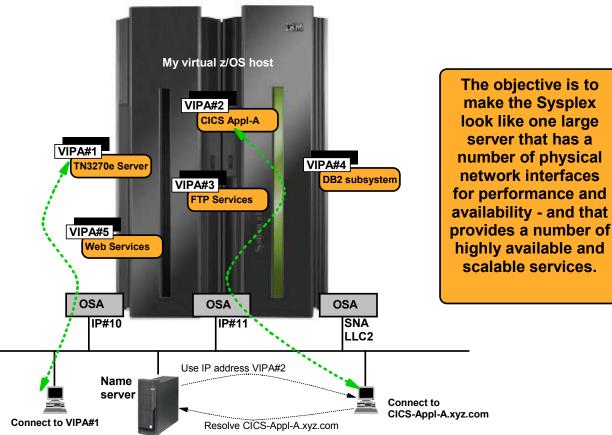

SNA and TCP/IP

- √Single-system image (SSI)
- √ Scalable
- √Highly available
- √ Secure



A summary of the different types of z/OS VIPA addresses

Static VIPA

- Belongs to one TCP/IP stack. Manual configuration changes are needed to move it.
 - No dependencies on Sysplex functions can be used in non-Sysplex LPARs
 - Required for certain functions such as Enterprise Extender
 - Beneficial for interface resilience, source IP addressing, etc.

Dynamic VIPA (DVIPA)

Stack-managed (VIPADEFINE/VIPABACKUP)

- Belongs to one TCP/IP stack, but backup policies govern which TCP/IP stack in the Sysplex takes it over if the primary TCP/IP stack leaves the Sysplex
- Individual stack-managed dynamic VIPAs can be moved between primary and backup stacks using MVS operator commands

Application-specific also known as bind-activated (VIPARANGE)

• Belongs to an application. Becomes active on the TCP/IP stack in the Sysplex where the application is started. Moves with the application.

Command- or utility activated (VIPARANGE)

- Belongs to whatever TCP/IP stack in the Sysplex on which a MODDVIPA utility to activate the address has been executed.
- Moves between TCP/IP stacks based on execution of the MODDVIPA utility.

Distributed also known as a DRVIPA or sometimes DDVIPA (VIPADEFINE/VIPABACKUP + VIPADISTRIBUTE)

- Used with Sysplex Distributor as a cluster IP address that represents a cluster of equal server instances in the Sysplex.
- From a routing perspective it belongs to one TCP/IP stack.
- From an application perspective it is distributed among the TCP/IP stacks in the Sysplex where an instance of the server application is executing.



Sysplex Distributor Overview and Workload Balancing Considerations



What are the main objectives of network workload balancing with Sysplex Distributor?

Performance

- Workload management across a cluster of server instances
- One server instance on one hardware node may not be sufficient to handle all the workload

Availability

- As long as one server instance is up-and-running, the "service" is available
- Individual server instances and associated hardware components may fail without impacting overall availability


Capacity management / horizontal growth

 Transparently add/remove server instances and/or hardware nodes to/from the pool of servers in the cluster

Single System Image

- Give users one target hostname to direct requests to
- Number of and location of server instances is transparent to the user

All server instances must be able to provide the same basic service. In a z/OS Sysplex that means the applications must be Sysplexenabled and be able to share data across all LPARs in the Sysplex.

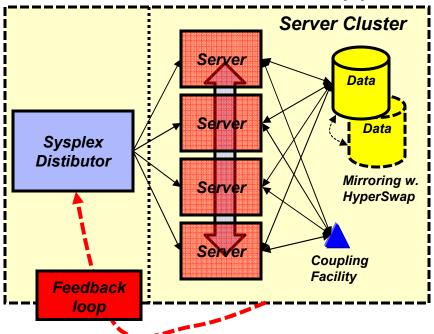

In order for the load balancing decision maker to meet those objectives, it must be capable of obtaining feedback dynamically, such as server instance availability, capacity, performance, and overall health.



Sysplex Distributor Distribution Methods

Distribution method	Description	Key attributes
BASEWLM	Uses WLM recommendations that are based on the available and displaceable capacity available on a target z/OS System	Dynamic updates, responds to changes in system wide utilization, also has several sources of additional health information that can be incorporated
SERVERWLM	Uses WLM recommendations that are based on available and displaceable capacity for the target application server, whether the application is meeting service class goals and facilities that allow for the incorporation of application specific health	Dynamic updates, responds to changes in system wide utilization and changes in performance and available capacity for the specific target application, also has several sources of additional health information that can be incorporated. Generally, the preferred distribution method!

Page 8 © 2014 SHARE and IBM Corporation



Sysplex Distributor Distribution Methods (cont)

Distribution method	Description	Key attributes
ROUNDROBIN	Static Round Robin Distribution across all eligible targets	Static distribution, awareness of target servers being up or not, limited ability to incorporate other health factors
WEIGHTEDACTIVE	Round Robin distribution based on user specified fixed weights, accounts for active connections already distributed	Largely a static distribution, awareness of target servers/applications being up or not, also takes into consideration real time information on number of active connections on each target, ability to incorporate other health factors

© 2014 SHARE and IBM Corporation




Sysplex Distributor Distribution Methods (cont)

Distribution method	Description	Key attributes
HOTSTANDBY	Targets primary target system as long as the system and application are active, otherwise selects the highest ranked backup target	Real time detection of failures to the primary system/application and switch to backup, limited ability to incorporate other health factors
TARGETCONTROLLED	Can be used to dynamically load balance connections to a cluster of IBM DataPower appliances (standalone appliances in the network or the integrated XI50z DataPower appliances in the zBX). Uses dynamic feedback on CPU utilization obtained from DataPower.	Dynamic load balancing based on DataPower availability and CPU utilization.

Page 10 © 2014 SHARE and IBM Corporation

Sysplex Distributor built-in awareness of abnormal conditions

- TSR Target Server Responsiveness
 - How healthy is the target system and application from an SD perspective? A percentage, 0-100%
 - Comprised of several individual health metrics:
 - TCSR Target Connectivity Success Rate
 - Are connections being sent to the Target System making it there?
 - A Percentage: 100 is good, 0 is bad

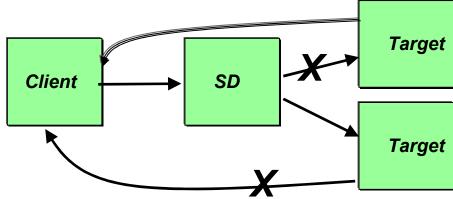

- CER Connectivity Establishment Rate
 - Is connectivity between the target system and the client ok?
 - By monitoring TCP Connection Establishment state (requires 3 way handshake between client and server) we can detect whether a connectivity issue exists
 - A percentage: 100 is good, 0 is bad
 - Note: CER no longer part of TSR directly but is included in SEF and continues to be calculated and reported separately




Sysplex Distributor built-in awareness of abnormal conditions

TSR – Target Server Responsiveness (cont)

Page 12

- SEF Server Efficiency Fraction
- Is the target server application server keeping up with new connections in its backlog queue?
 - Is the new connection arrival rate higher than the application accept rate? (i.e. is backlog growing over time)
 - How many connections in the TCP backlog queue? How close to maximum backlog queue depth? Did we have to drop any new connections because the backlog queue max was exceeded?
 - > Is the server application hung? (i.e. not accepting any connections)

Are the number of half-open connections on the backlog queue growing? (Similar to CER – One such scenario is when the target system does not have network connectivity to the client)

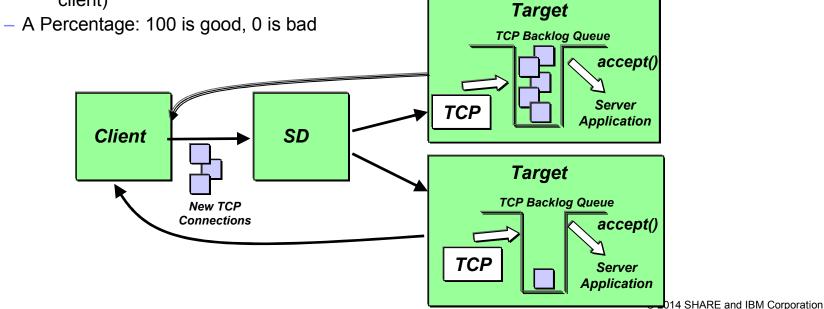



Middleware/Application Issues and the "Storm Drain Problem"

- TCP/IP and WLM are not aware of all problems experienced by load balancing targets (middleware/applications) – Examples:
 - The server application needs a resource such as a database, but the resource is unavailable
 - The server application is failing most of the transactions routed to it because of internal processing problems
 - The server application acts as a transaction router for other back-end applications on other system(s), but the path to the back-end application is unavailable
- In each of these scenarios, the server may appear to be completing the transactions quickly (using little CPU capacity) when they are actually being failed
- This is sometimes referred to as the Storm Drain Problem
 - The server is favored by WLM since it is using very little CPU capacity
 - As workloads increase, the server is favored more and more over other servers
 - All this work goes "down the drain"




Improving WLM awareness of Application Health - Avoiding "Storm Drain" Issues

Server Scenarios

1 IWM4SRSC WLM Service

- Used by Sysplex Distributor to obtain WI M recommendations
- Abnormal Termination information: Reported by 1st tier server when transactions can not complete because back end resource managers are not available
 - WLM uses this information to reduce the recommendation for ailing server

- Allows address spaces which are not instrumented with WLM to set a health status which is also returned by IWM4SRSC
- The ServerWLM recommendations are reduced when the health is <100%</p>
- Exploited by CICS Transaction Gateway, DB2 and LDAP

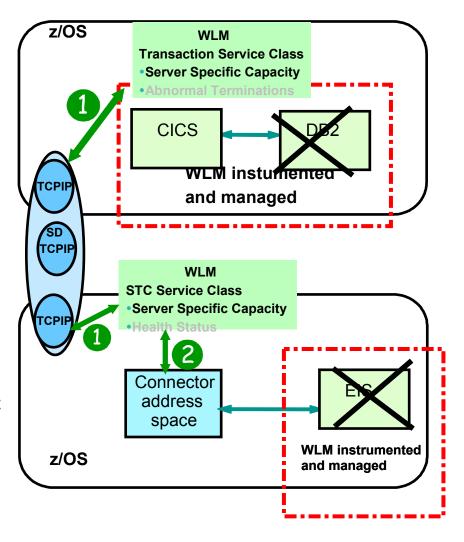




What impacts the final selection of a target server instance?

Technology	Target LPAR displaceable capacity as seen by WLM	Server instance performance as seen by WLM	Server instance self-perceived health (as reported to WLM)	Server instance TCP/IP perceived health (the TSR value)	QoS perceived network performance (the QoS fraction)
SD ROUNDROBIN	No	No	No	Yes (if TSR=zero)	No
SD WEIGHTEDACTIVE	No	No	Yes	Yes	No
SD BASEWLM	Yes	No	No	Yes	Yes
SD SERVERWLM	Yes	Yes	Yes	Yes	Yes
SD TARGETCONTROLLED	Yes (SD agent)	No	No	No	No
SD HOTSTANDBY	No	No	Yes	Yes	No
PORT SHAREPORT	No	No	No	Yes (Only SEF value)	No
PORT SHAREPORTWLM	No	Yes	Yes	Yes (Only SEF value)	No



Using Netstat VDPT Detail display to monitor Sysplex Distributor

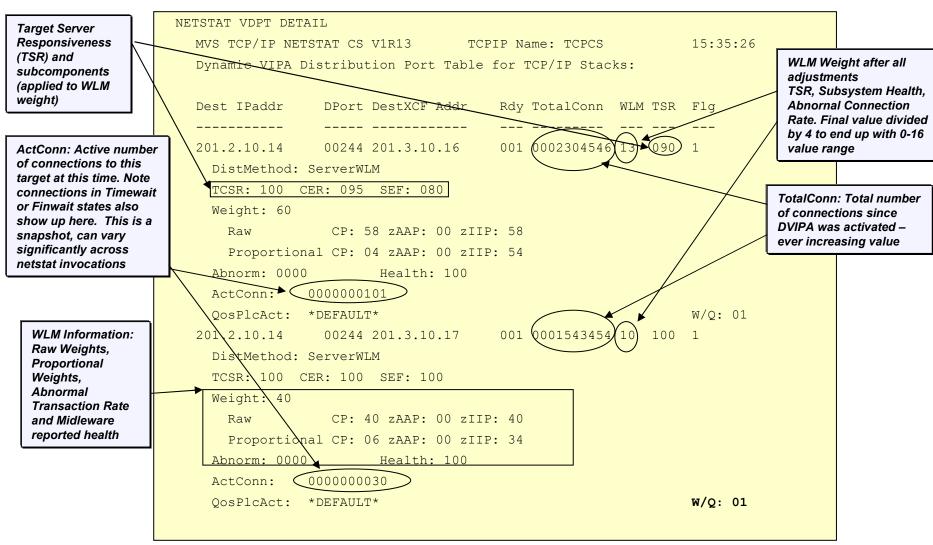

Page 16

© 2014 SHARE and IBM Corporation



Monitoring Sysplex Distributor – Sample Scenarios

- While Sysplex Distributor provides many autonomic functions that optimize load balancing based on the current Sysplex conditions there are scenarios where monitoring changes in workload distribution can help identify problems so that corrective actions can be taken
 - TCP/IP provided facilities like the Netstat VDPT Detail report can be very useful for gaining insight into the current state of the system and Sysplex Distributor
 - Provides a lot of detail if you know what you are looking for
 - A snapshot of the current state of the system (no historical perspective is provided)
 - And it depends on the user issuing the command to detect problems (no automated notification of problem conditions)
 - Next we will examine NetView for z/OS and its advanced management functions for DVIPAs and how it can improve your monitoring operations for DVIPAs
 - With a focus on its support for Sysplex Distributor and how can it can help reduce problem resolution time and make monitoring the environment more efficient

Page 17



NetView for z/OS DVIPA Management Overview



DVIPA Management Capabilities

- NetView provides a lot of DVIPA information for use in managing and diagnosing problems in your sysplex:
 - Sampled, real-time, and historical monitoring capabilities
 - DVIPA events
 - Distributed DVIPA statistics
- DVIPA information can be viewed at the:
 - Local NetView domain
 - Sysplex master NetView domain
 - Displays DVIPA information available from all NetView domains in the sysplex
 - NetView domains must all participate in the same NetView XCF group
 - DVIPA connection information is not forwarded to the sysplex master NetView for performance reasons
- DVIPA information is displayed in the:
 - Tivoli Enterprise Portal (TEP) using the NetView for z/OS Enterprise Management Agent
 - NetView 3270 console

DVIPA Monitoring

- NetView provides the following DVIPA information:
 - DVIPA Definition and Status, including views for:
 - Application-instance DVIPAs
 - Stack-defined DVIPAs
 - Sysplex Distributors
 - Distributed DVIPA (DDVIPA) Targets
 - DDVIPA Server Health, including a view for:
 - DDVIPA Unhealthy Servers
 - DVIPA Connections
 - VIPA Routing
 - DDVIPA Connection Routing
- TEP displays sampled and historical data, which can be updated using DVIPA events
 - Historical data collection must be enabled
 - Long term history requires Tivoli Data Warehouse.
- NetView 3270 commands and samples display real-time DVIPA

 Page information

 © 2014 SHARE

DVIPA Events

- DVIPA Events can be used to provide a better "real time" view of DVIPA information. NetView has automation for three types of DVIPA Events:
 - Real-time DVIPA changes
 - DVIPA status change and DVIPA removed
 - DVIPA target added and removed
 - DVIPA target server started and ended
 - Requires z/OS V1R12 Communications Server
 - Equivalent data can be retrieved from DVIPA SNMP traps
 - DVIPA Configuration Changes
 - Requires z/OS V1R11 Communications Server (out of support)
 - Sysplex Autonomics messages
- When a DVIPA event is received:
 - NetView will bundle the events using configurable delays
 - Notify the master that this system needs rediscovering
 - The master NetView also has a delay to bundle the event messages
 - Send rediscovery commands to all systems in the sysplex impacted by the event

Distributed DVIPA Statistics

- Provides the capability to collect workload distribution for each distributed DVIPA target
 - Used for problem determination
 - Used for historical data
- Collects and calculates data after each DDVIPA sampled data collection
- Starts during NetView initialization or using DVIPALOG command
- Writes data to a sequential data set
 - Primary and secondary data sets allocated
 - Messages indicate data set switching
- Sample CNMSDVST shows data in both data sets on NetView 3270 console
- Forwards data to master NetView, if configured to do so
- Reports (not provided by NetView) can be written against the data

DDVIPA Statistics Information Provided

- STCK
- Date
- Time
- System
- TCP Job Name
- DDVIPA
- DDVIPA Port
- Target System

- Target TCP Job Name
- Distribution Method
- Total Connections
- Delta Connections
- WLM Weight
- SD Percentage TCP Connections
- Percentage WLM Weight

DVIPA 3270 Commands and Samples

- DVIPSTAT (CNMSDVIP)
 - Displays DVIPA definition and status information
- DVIPPLEX (CNMSPLEX)
 - Displays Distributed DVIPA (DDVIPA) information
- DVIPTARG (CNMSTARG)
 - Displays Distributed DVIPA targets information
- DVIPHLTH (CNMSDVPH)
 - Displays DDVIPA server health information
- DVIPCONN (CNMSDVPC)
 - Displays DVIPA connections
- VIPAROUT (CNMSVPRT)
 - Displays VIPA route information
- DVIPDDCR (CNMSDDCR)
 - Displays distributed DVIPA connection routing information




NetView for z/OS DVIPA User Interfaces






TEP Navigation Tree

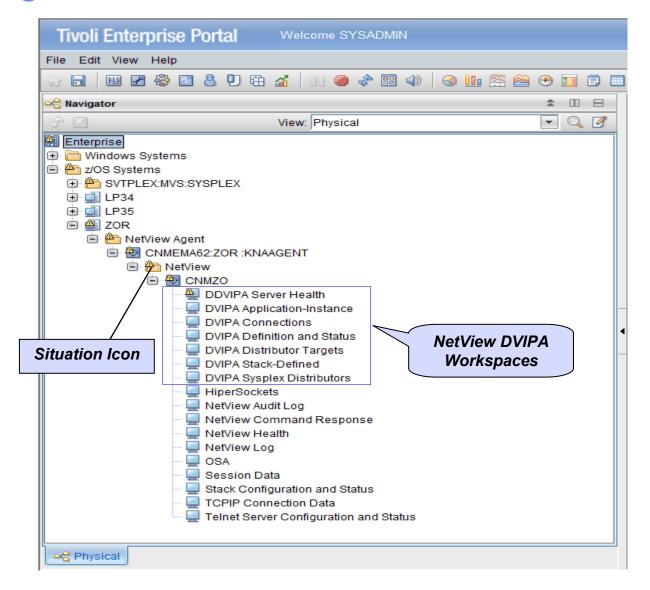

Page 26 © 2014 SHARE and IBM Corporation



Distributed DVIPA Targets Workspace

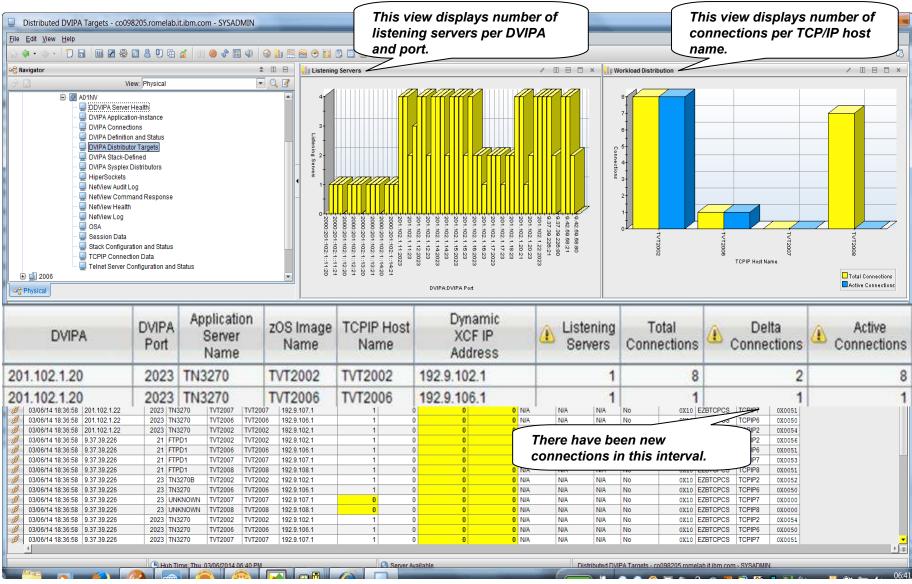

Page 27



CNMSTARG Sample on NetView 3270 Console

CNMKWIND OUTPUT FRO	CNMSTARG							
BNH813I NUMBER OF D	ISTRIBUTED DV	IPA TARGETS	: 155					
# DVIPA-address	Distrib-port	Job-server	z/OS-name	Host-target	XCF-addr-target	Num-servers	Total-conns	Curr-conns
102 201.102.1.15	2023	TN3270	TVT2007	TVT2007	192.9.107.1	1	0	0
103 201.102.1.15	2023	TN3270	TVT2008	TVT2008	192.9.108.1	1	0	0
104 201.102.1.16	2023	TN3270	TVT2006	TVT2006	192.9.106.1	1	0	0
105 201.102.1.16	2023	TN3270	TVT2007	TVT2007	192.9.107.1	1	0	0
106 201.102.1.20	25	SMTP	TVT2002	TVT2002	192.9.102.1	1	0	0
107 201.102.1.20	25	SMTP	TVT2006	TVT2006	192.9.106.1	1	0	0
108 201.102.1.20	25	SMTP	TVT2007	TVT2007	192.9.107.1	1	0	0
109 201.102.1.20	25	SMTP	TVT2008	TVT2008	192.9.108.1	1	0	0
110 201.102.1.17	2023	TN3270	TVT2002	TVT2002	192.9.102.1	1	0	0
111 201, 102, 1, 17	2023	TN3270	TVT2008	TVT2008	192,9,108,1	1	0	0
112 201.102.1.20	2023	TN3270	TVT2002	TVT2002	192.9.102.1	1	8	8
113 201.102.1.20	2023	TN3270	TVT2006	TVT2006	192.9.106.1	1	2	1
114 201.102.1.20	2023	TN3270	TVT2007	TVI 2007	192.9.107.1	1	θ	0
115 201.102.1.20	2023	TN3270	TVT2008	TVT2008	192.9.108.1	1	0	0
116 201.102.1.22	2023	TN3270	TVT2008	TVT2008	192.9.108.1	1	7	0
117 201.102.1.22	2023	TN3270	TVT2007	TVT2007	192.9.107.1	1	0	0
118 201.102.1.22	2023	TN3270	TVT2006	TVT2006	192.9.106.1	1	0	0
119 201.102.1.22	2023	TN3270	TVT2002	TVT2002	192.9.102.1	1	0	0
120 9.37.39.226	21	FTPD1	TVT2002	TVT2002	192.9.102.1	1	0	0



Using NetView for z/OS DVIPA Management functions for specific Sysplex Distributor workload balancing scenarios





Monitoring Sysplex Distributor – Sample Scenarios

- 1. Help desk is receiving calls indicating performance issues using an application that is distributed via Sysplex Distributor. You want to understand how TCP connections have been distributed for given Distributed DVIPA over the past 30 minutes.
- 2. Sysplex Distributor seems to be favoring one z/OS System significantly more than others for new TCP connections? Why is that?

3. Sysplex Distributor Health metrics are great, they help detect problems and adjust load balancing to avoid systems/applications that have issues. But how do I know that this is happening so I can take corrective actions?

Page 30 © 2014 SHARE and IBM Corporation



Scenario 1: Application Performance Issues

- Distributed DVIPA Statistics will show you how your DDVIPA connections have been distributed for the application with performance issues for DDVIPA 197.11.211.1 on port 52002.
- Scenario information
 - Your DDVIPA sampling interval is 5 minutes (DVIPA.DVTAD tower)
 - DDVIPA Statistics is enabled and started across all systems in your sysplex
 - If not started, start it dynamically with the DVIPALOG command and filters, as desired
 - Once the next sampling interval passes, issue NetView sample command:
 CNMSDVST

or


wait for 30 minutes and issue:

CNMSDVST DVIPA=197.11.211.1 PORT=52002 and scroll through the output.

© 2014 SHARE and IBM Corporation



Scenario 1: CNMSDVST output

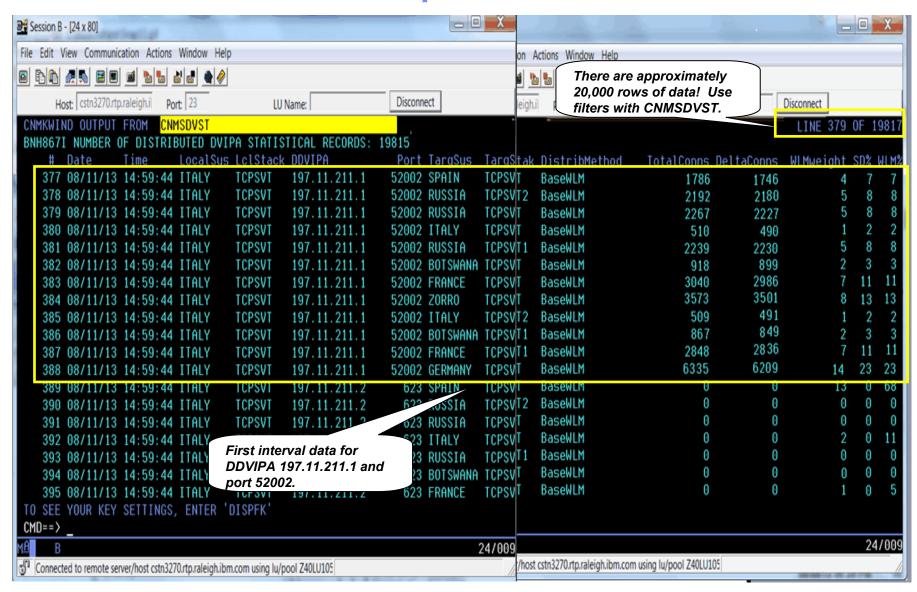



Scenario 1: CNMSDVST output (truncated)

DDVIPA	Port	TargSys	TargSt	TotalConns	DeltaConns	WLMweight	SD%	WLM%
197.11.211.1	52002	SPAIN	TCPSVT	1786	1746	4	7	7
197.11.211.1	52002	RUSSIA	TCPSVT	2192	2180	5	8	8
197.11.211.1	52002	RUSSIA	TCPSVT	2267	2227	5	8	8
197.11.211.1	52002	ITALY	TCPSVT	510	490	1	2	2
197.11.211.1	52002	RUSSIA	TCPSVT	2239	2230	5	8	8
197.11.211.1	52002	BOTSWANA	TCPSVT	918	899	2	3	3
197.11.211.1	52002	FRANCE	TCPSVT	3040	2986	7	11	11
197.11.211.1	52002	ZORRO	TCPSVT	3573	3501	8	13	13
197.11.211.1	52002	ITALY	TCPSVT	509	491	1	2	2
197.11.211.1	52002	BOTSWANA	TCPSVT	867	849	2	3	3
197.11.211.1	52002	FRANCE	TCPSVT	2848	2836	7	11	11
197.11.211.1	52002	GERMANY	TCPSVT	6335	6209	14	23	23

Note that SD% and WLM% match, which means connections are being distributed correctly.

Page 33 © 2014 SHARE and IBM Corporation




Scenario 1: DDVIPA Sysplex Distribution Percentage

Using the data from DDVIPA Statistics, you can track DDVIPA connection distribution. The graph below maps the Sysplex Distributor Connection Information provided by DDVIPA Statistics over 30 minutes.

NetView for z/OS does not provide this function.

For our scenario, the connections are being distributed consistently across all target stacks. However, there is a wide disparity in the number of connections per stack.

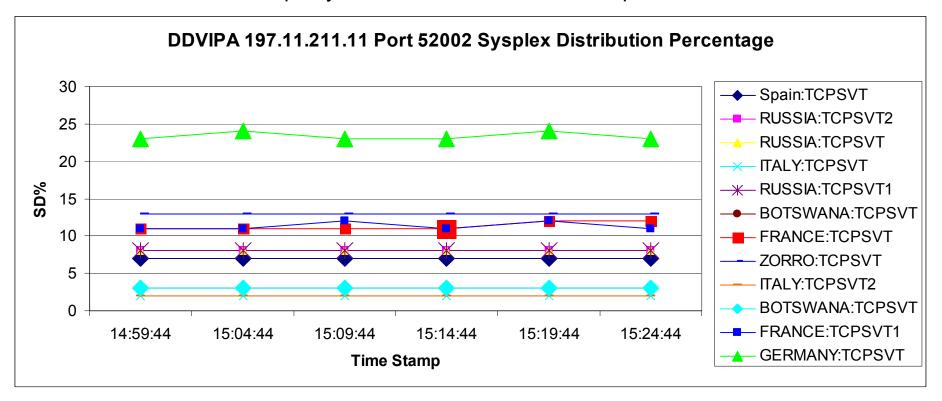



Monitoring Sysplex Distributor – Sample Scenarios

- 1. Help desk is receiving calls indicating performance issues using an application that is distributed via Sysplex Distributor. You want to understand how TCP connections have been distributed for given Distributed DVIPA over the past 30 minutes.
- 2. Sysplex Distributor seems to be favoring one z/OS System significantly more than others for new TCP connections? Why is that?
- 3. Sysplex Distributor Health metrics are great, they help detect problems and adjust load balancing to avoid systems/applications that have issues. But how do I know that this is happening so I can take corrective actions?

Page 35 © 2014 SHARE and IBM Corporation




Scenario 2: Sysplex Distributor Favoring a System

- The NetView DDVIPA Server Health workspace displays the WLM weight for DDVIPA targets. WLM weight is a key metric for DDVIPA connection distribution.
- Scenario information:
 - DVIPA 9.42.46.85 on port 2023

© 2014 SHARE and IBM Corporation





Scenario 2: WLM Weight and DDVIPA Server Health

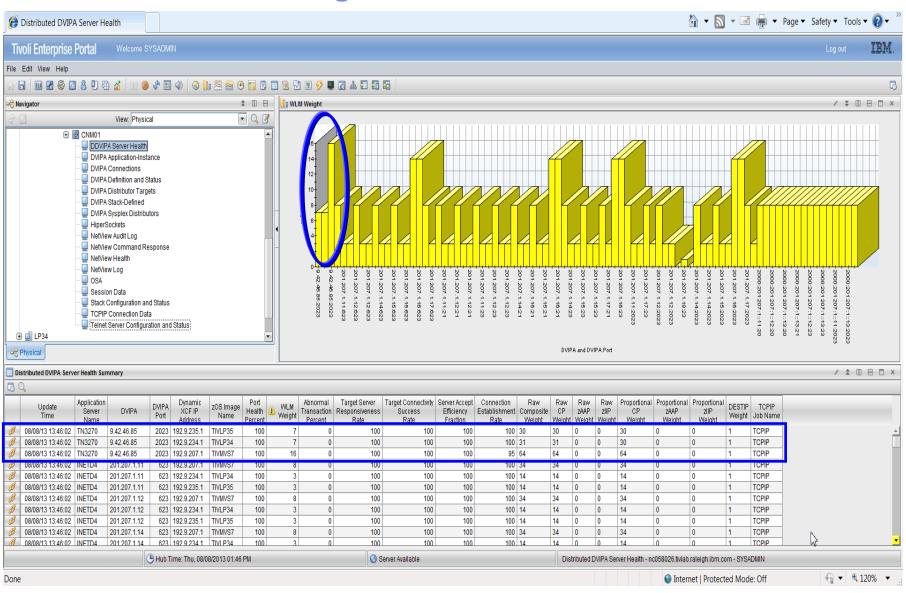



Scenario 2: WLM Weight Bar Chart



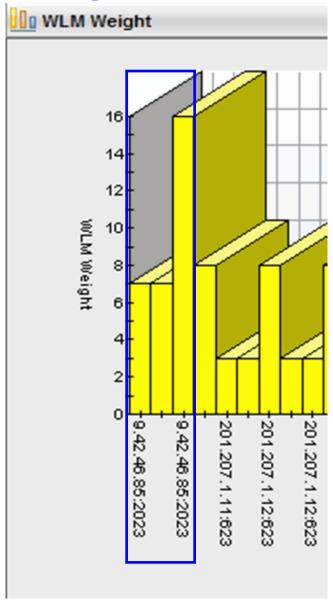

and Port 2023.



Scenario 2: WLM Weight and DDVIPA Server Health

Application Server Name	DVIPA	DVIPA Port	Dynamic XCF IP Address	zOS Image Name	Port Health Percent	⚠ WLM Weight	Abnormal Transaction Percent	Target Server Responsiveness Rate	Target Connectivity Success Rate
TN3270	9.42.46.85	2023	192.9.235.1	TIVLP35	100	7	0	100	100
TN3270	9.42.46.85	2023	192.9.234.1	TIVLP34	100	7	0	100	100
TN3270	9.42.46.85	2023	192.9.207.1	TIVMVS7	100	16	0	100	100

Server Accept Efficiency Fraction	Connection Establishment Rate	Raw Composite Weight	Raw CP Weight	Raw zAAP Weight	Raw zIIP Weight	Proportional CP Weight
100	100	30	30	0	0	30
100	100	31	31	0	0	30
100	95	64	64	0	0	64

WLM Weight for TIVMVS7 (z196) is double that of TIVLP34 (z10) and TIVLP35 (z10).



Monitoring Sysplex Distributor - Sample Scenarios

- 1. Help desk is receiving calls indicating performance issues using an application that is distributed via Sysplex Distributor. You want to understand how TCP connections have been distributed for given Distributed DVIPA over the past 30 minutes.
- 2. Sysplex Distributor seems to be favoring one z/OS System significantly more than others for new TCP connections? Why is that?

3. Sysplex Distributor Health metrics are great, they help detect problems and adjust load balancing to avoid systems/applications that have issues. But how do I know that this is happening so I can take corrective actions?


Page 40 © 2014 SHARE and IBM Corporation

Scenario 3: Sysplex Distributor Health Notifications

- NetView provides situations with the NetView Agent.
 - Disabled by default
 - "Shipped" situations can be customized
 - New situations can be created
- Scenario information:
 - Operator has 3 open situations on the TEP for Distributed DVIPAs for domain CNMZO related to DDVIPA Server Health
 - Server Accept Efficiency Fraction (SEF) < 70%
 - Created for this scenario
 - Target Server Responsiveness Rate (TSR) < 80%
 - WLM Weight = 0
 - Looking at the Navigator Tree, LPAR ZOR, shows the situation icon, so we'll start there.
 - We also have a DDVIPA Unhealthy Servers workspace
 - Let's look at that




Scenario 3: Enterprise Status View

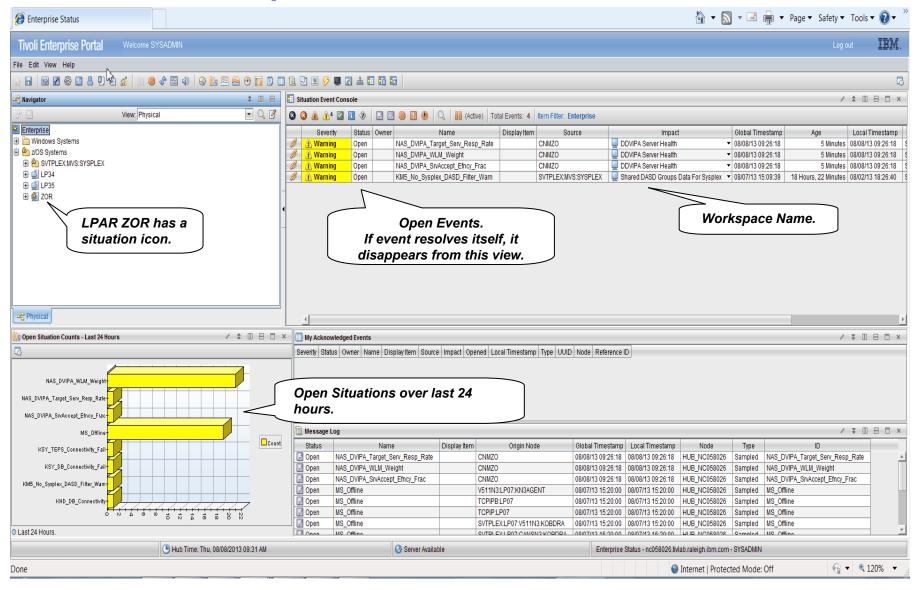



Scenario 3: Situation Event Console

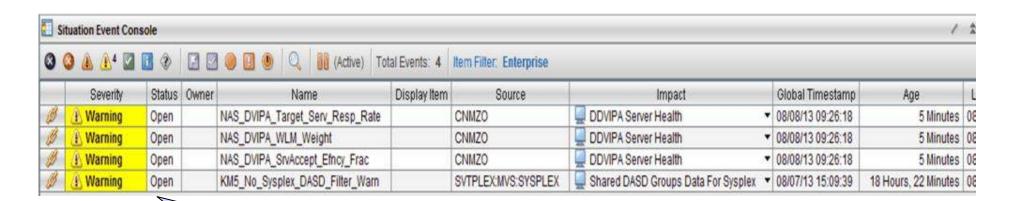


Open Events.
If event resolves
itself, it disappears
from this view.

Workspace Name.

Page 43 © 2014 SHARE and IBM Corporation




Scenario 3: Enterprise Status View

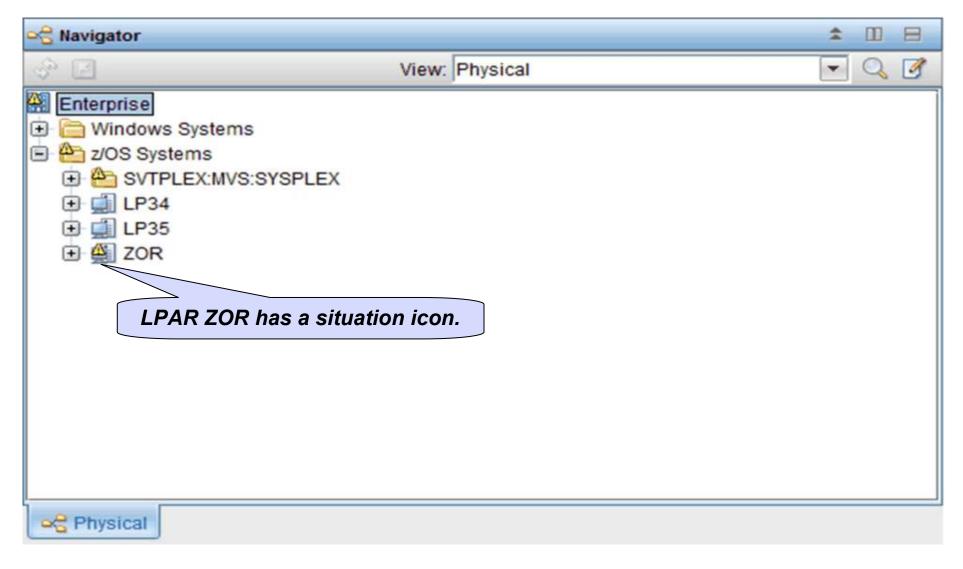




Scenario 3: WLM Weight = 0 Suggested Actions

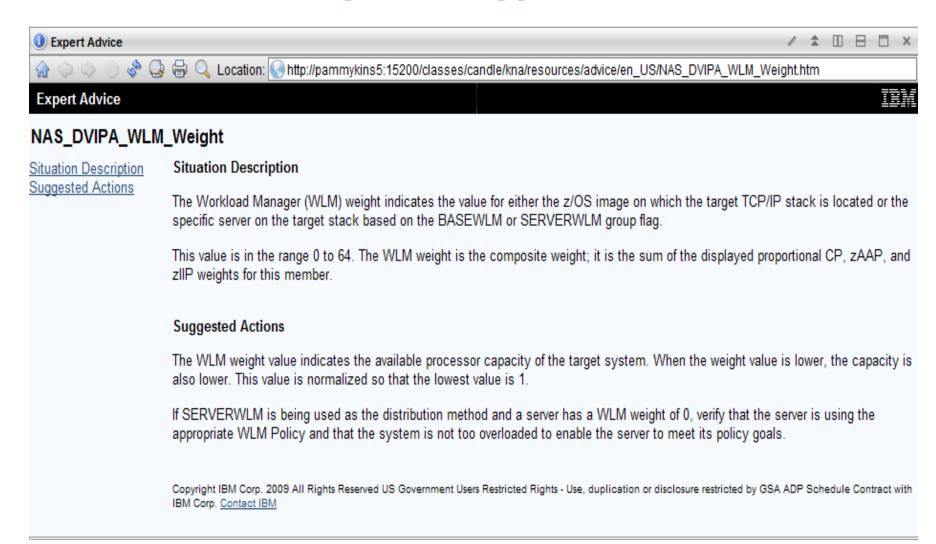

Page 45 © 2014 SHARE and IBM Corporation




Scenario 3: Open Situation Counts Last 24 Hours

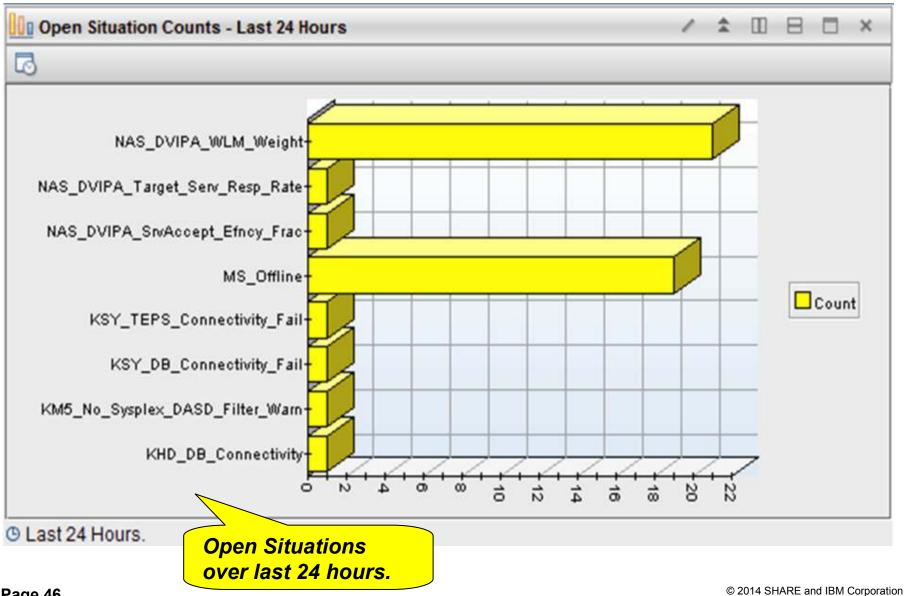

Page 46




Scenario 3: DDVIPA Server Health Navigation

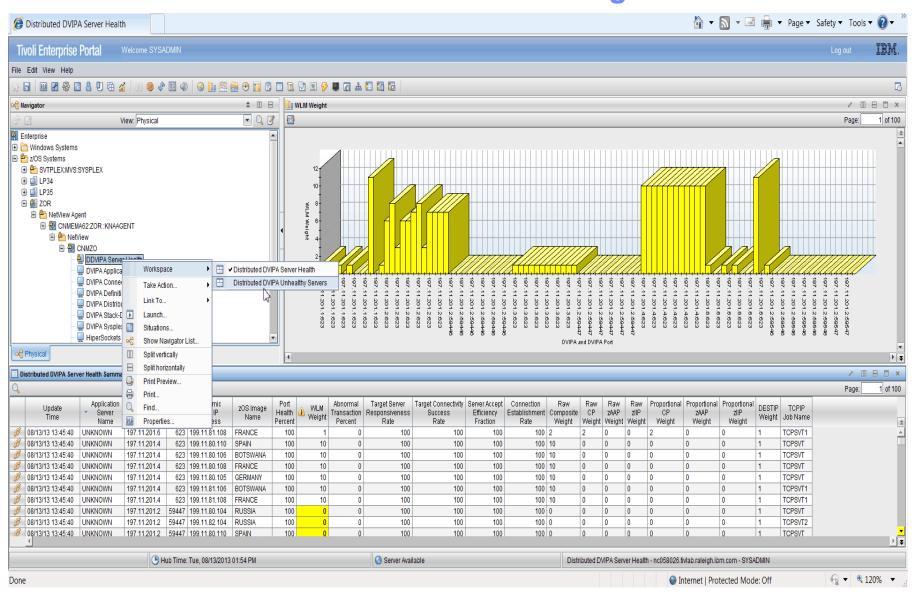




Scenario 3: Select DDVIPA Unhealthy Servers

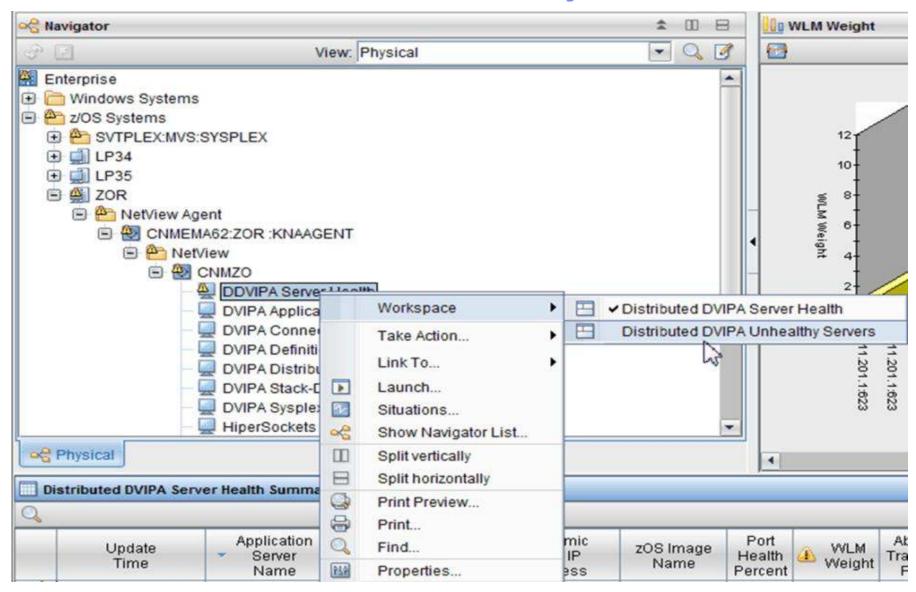



Scenario 3: DDVIPA Unhealthy Servers

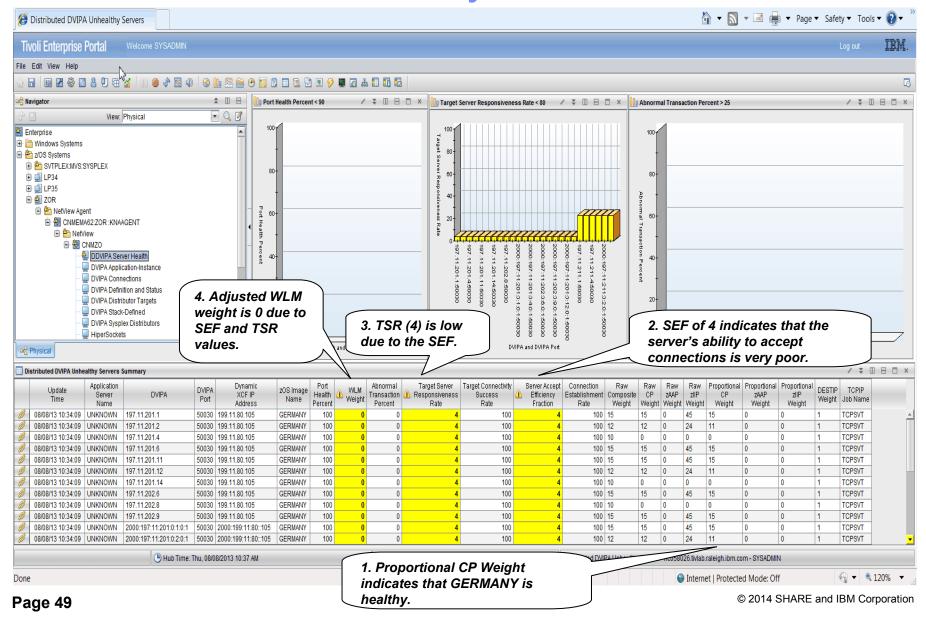



Scenario 3: DDVIPA Unhealthy Servers

zOS Image Name	Proportional CP Weight	WLM Weight	Abnormal Transaction Percent	Target Server Responsiveness Rate	Target Connectivity Success Rate	Server Accept Efficiency Fraction
GERMANY	15	0	0	4	100	4
GERMANY	11	0	0	4	100	4
GERMANY	0	0	0	4	100	4
GERMANY	15	0	0	4	100	4
GERMANY	15	0	0	4	100	4
GERMANY	11	0	0	4	100	4
GERMANY	0	0	0	4	100	4
GERMANY	15	0	0	4	100	4
GERMANY	0	0	0	4	100	4
GERMANY	15	0	0	4	100	4
GERMANY	15	0	0	4	100	4
GERMANY	11	0	0	4	100	4

1. Proportional CP Weight indicates that GERMANY is healthy.

4. Adjusted WLM weight is 0 due to SEF and TSR values.

3. TSR (4) is low due to the SEF.

2. SEF of 4 indicates that the server's ability to accept connections is very poor.



NetView Sysplex Distributor Management Summary

- NetView provides:
 - Quick insights to help you diagnosis problems related to Sysplex Distributor problems
 - Data to help you do capacity planning
 - Sampled, real-time, and historical data
 - Programmable command interface



Questions?



Please fill out your session evaluation

- z/OS Communications Server and NetView for z/OS DVIPA (Dynamic Virtual IP Addressing)
 Management
- Session # 14872
- QR Code:



© 2014 SHARE and IBM Corporation

For more information

URL	Content			
http://www.twitter.com/IBM_Commserver	IBM z/OS Communications Server Twitter Feed			
http://www.facebook.com/IBMCommserver facebook	IBM z/OS Communications Server Facebook Page			
https://www.ibm.com/developerworks/mydeveloperworks/blogs/IBMCommserver/?lang=en	IBM z/OS Communications Server Blog			
http://www.ibm.com/systems/z/	IBM System z in general			
http://www.ibm.com/systems/z/hardware/networking/	IBM Mainframe System z networking			
http://www.ibm.com/software/network/commserver/	IBM Software Communications Server products			
http://www.ibm.com/software/network/commserver/zos/	IBM z/OS Communications Server			
http://www.redbooks.ibm.com	ITSO Redbooks			
http://www.ibm.com/software/network/commserver/zos/support/	IBM z/OS Communications Server technical Support – including TechNotes from service			
http://www.ibm.com/support/techdocs/atsmastr.nsf/Web/TechDocs	Technical support documentation from Washington Systems Center (techdocs, flashes, presentations, white papers, etc.)			
http://www.rfc-editor.org/rfcsearch.html	Request For Comments (RFC)			
http://www.ibm.com/systems/z/os/zos/bkserv/	IBM z/OS Internet library – PDF files of all z/OS manuals including Communications Server			
http://www.ibm.com/developerworks/rfe/?PROD_ID=498	RFE Community for z/OS Communications Server			
https://www.ibm.com/developerworks/rfe/execute?use_case=tutorials	RFE Community Tutorials			

For pleasant reading



For more information cont.

http://www.ibm.com/software/tivoli/products/netview-zos/	IBM NetView for z/OS Website
http://tech.groups.yahoo.com/group/NetView/	IBM NetView for z/OS Customer Forum
https://www.ibm.com/developerworks/mydeveloperworks/groups/servic e/html/communityview?communityUuid=5e65990a-9690-42e2-93b1-c2267be7620c#fullpageWidgetId=Waa62f018a05a_4ca4_b612_49ffee 80398e&file=1fafd5bd-512c-40cd-aa90-61112457f9fc	Whitepaper on NetView for z/OS IP Management
https://www.ibm.com/developerworks/mydeveloperworks/wikis/home?lang=en#/wiki/Tivoli+System+z+Monitoring+and+Application+Management/page/Tivoli+NetView+for+zOS	IBM NetView for z/OS Wikis
http://pic.dhe.ibm.com/infocenter/tivihelp/v3r1/index.jsp?topic=%2Fcom.ibm.itnetviewforzos.doc%2Fic-homepage.html http://www-01.ibm.com/support/knowledgecenter/SSZJDU/welcome	IBM NetView for z/OS Documentation (Information Center and Knowledge Center)
https://www.ibm.com/developerworks/mydeveloperworks/wikis/home?l ang=en#/wiki/Tivoli+System+z+Monitoring+and+Application+Manage ment/page/Media+Gallery+for+Tivoli+NetView+for+zOS	IBM NetView for z/OS Media Gallery
https://www.ibm.com/developerworks/servicemanagement/z/index.htm I	Service Management Connect: System z community

