

SMP/E V3.5 Advanced Function Hands-on Lab
Session: 7410
Greg Daynes
August 2010



SHARE in Boston 

**Session Title: Using SMP/E
Advanced Functions: Hands-on Lab
Session: 7410**

Greg Daynes
gdaynes@us.ibm.com
STSM - z/OS Installation and Deployment Architect




© 2010 IBM Corporation

Using SMP/E Advanced Functions: Hands-on Lab

SMP/E V3.5 became available 26 September 2008 as an IBM Program Product which can be installed on top of all supported z/OS releases, and as part of z/OS V1.10. SMP/E V3.5 simplifies the task of verifying that required software fixes for new hardware devices, toleration and coexistence of new software releases, and for enabling new functions are installed. IBM consolidates the lists of required fixes from PSP buckets and produces new Fix Category (FIXCAT) HOLDDATA to identify those fixes.

Come to this lab to learn how to upgrade to SMP/E V3.5, and use the new FIXCAT HOLDDATA. You will learn how to use the new SMP/E Explorer, and how to use the new SMP/E REPORT MISSINGFIX command. If you are tired of manually looking at PTFs in PSP buckets, this is something you must attend.

SHARE in Boston 

Agenda

- Brief review of SMP/E V3.5
- Lab SMP/E Environment
- Lab Exercises
 - Upgrade existing SMP/E Global, target, and distribution zones to the new SMP/E V3.5 level.
 - Run an SMP/E RECEIVE command to process the new FIXCAT HOLDDATA
 - Use the Fix Category Explorer to create a persistent list of categories that you are interested in
 - Run a REPORT MISSINGFIX command to identify
 - Use the SMP/E ISPF Command Generation Dialogs to run a REPORT MISSINGFIX command

2 © 2010 IBM Corporation

SHARE in Boston

SMP/E V3.5 Introduction



- **IBM SMP/E for z/OS Version 3 Release 5**
 - Program number 5655-G44
 - Entitled (no additional charge) to licensees of all currently supported z/OS or z/OS.e releases
- Availability:
 - SMP/E V3.5 is an independent and separately orderable product, and
 - SMP/E V3.5 is a base element of z/OS V1.10, z/OS V1.11, **and z/OS V1.12***
- Ordering and Delivery
 - Individual product order via ShopzSeries (CPBDO package)
 - Both physical and Internet delivery options available
 - Included in system replace ServerPac orders for z/OS V1.10, z/OS V1.11, **and z/OS V1.12***

* Statements regarding IBM future direction and intent are subject to change or withdrawal, and represents goals and objectives only.

3

© 2010 IBM Corporation

SHARE in Boston



Current process for 'New Hardware, Release or Function' Service




1. **Identify PSP Buckets to review**
2. **Review required service from the PSP Buckets and Product Documentation**
 - Hardware buckets for required service for device support or exploiting specific hardware functions.
 - Software buckets for recommended service to be installed when you install the software
 - Functional buckets for the list of Service Recommendations needed for the function
 - Product documentation for "driving system", coexistence, and cross product target system functional requirements
3. **Acquire the missing service and install all required service**
4. **Monitor PSP Bucket – as needed**
 - Can use Enhanced PSP Tool to identify uninstalled PSP Bucket service, and then acquire and install missing fixes

4

© 2010 IBM Corporation

SHARE in Boston

Problems with the Current Methods



1. Procedure is very manual
2. The tools are **NOT** integrated into your existing processes
 - Extract files are not delivered when service is acquired
 - Report program is not part of SMP/E
 - No easy way to acquire or APPLY missing service
3. The procedure is geared to process one SUBSET at a time (when multiple SUBSETS are required)
4. Because of the above, many of you do NOT analyze PSP buckets
 - Or if you do,
 - You do not actively monitor updates in PSP buckets
 - You do not review hardware and functional buckets when you install new software levels (FMIDs).
5. There is no easy way to identify new hardware or functional buckets, or establish a list of buckets that are of interest.

5

© 2010 IBM Corporation

SHARE in Boston

New Fix Category HOLDDATA



- Create metadata that associates PTFs with one or more fix categories
 - Such as fixes needed for:
 - Specific hardware levels
 - New software FMIDs
 - Enabling new hardware/software functions
- Deliver the metadata with existing PTF and HOLDDATA acquisition procedures.
- Integrate verification and installation tasks within typical SMP/E operations.

6

© 2010 IBM Corporation

Sample FIXCAT HOLDDATA

```

++HOLD(HDZ1B10) FIXCAT FMID(HDZ1B10) REASON(AA32004) RESOLVER(UA54754)
CATEGORY(IBM.ProductInstall-RequiredService, IBM.Function.VSAM-RLS)
DATE(10193) .
++HOLD(HDZ1C10) FIXCAT FMID(HDZ1C10) REASON(AA32004) RESOLVER(UA54755)
CATEGORY(IBM.ProductInstall-RequiredService, IBM.Function.VSAM-RLS)
DATE(10193) .
++HOLD(HBB7740) FIXCAT FMID(HBB7740) REASON(AA32081) RESOLVER(UA55256)
CATEGORY(IBM.Device.Server.z10-EC-2097, IBM.Device.Server.z10-BC-2098)
DATE(10194) .
  
```

IBM Fix Category Values and Descriptions

▪ What is a fix category?

- A fix category is an identifier used to group and associate PTFs to a particular category of software fixes.
- A fix category might be used to identify a group of fixes that are required to support a particular hardware device, or to provide a particular software function, similarly to how a preventive service planning bucket (PSP-bucket) identifies a group of PTFs.
- Fix categories are supplied to you in the form of SMP/E FIXCAT HOLDDATA statements.
- Each FIXCAT HOLDDATA statement associates an APAR and its related fixing PTF to one or more fix categories.

▪ What fix categories are available

- A description of all IBM provided fix categories is available on the web
 - <http://www-03.ibm.com/systems/z/os/zos/smpe/fixcategory.html>

▪ How do I acquire FIXCAT HOLDDATA statements?

- For all IBM product and service offerings, SMP/E FIXCAT HOLDDATA statements are supplied in the same file as ERROR HOLDDATA statements.
- This file is available using SMP/E RECEIVE ORDER, ShopzSeries, ServiceLink, CBPDO, ProductPac, ServerPac, SystemPac, and on the Enhanced HOLDDATA web site ("full" 2 year file only).
 - <http://service.software.ibm.com/holddata/390holddata.html>

What is a fix category?

A fix category is an identifier used to group and associate PTFs to a particular category of software fixes.

A fix category might be used to identify a group of fixes that are required to support a particular hardware device, or to provide a particular software function, similarly to how a preventive service planning bucket (PSP-bucket) identifies a group of PTFs. Fix categories are supplied to you in the form of SMP/E FIXCAT HOLDDATA statements. Each FIXCAT HOLDDATA statement associates an APAR and its related fixing PTF to one or more fix categories.

During SMP/E RECEIVE command processing, SMP/E translates fix category values into source IDs and assigns them to the resolving (fixing) PTFs identified on the HOLDDATA. You can then use the fix category values as source IDs when selecting a set of PTFs to be applied. For example, if you have a z/OS V1.11 target zone named ZOSR11T, you can attempt to install all required coexistence and fallback fixes for z/OS V1.12 that have already been received by using the following command:

```
SET BDY(ZOSR11T) .
  APPLY SOURCEID(IBM.Coexistence.z/OS.V1R12) CHECK.
```

In addition, the SMP/E REPORT MISSINGFIX command can be used to identify PTFs for interesting fix categories that are missing in one or more target zones. In this case only the latest HOLDDATA needs to be received and not the individual resolving PTFs. For example, using the same zone as described above, you can identify all required coexistence and fallback fixes for z/OS V1.12 that are not yet applied in the ZOSR11T zone by using the following command:

```
SET BDY(GLOBAL) .
  REPORT MISSINGFIX ZONES(ZOSR11T)
  FIXCAT(IBM.Coexistence.z/OS.V1R12) .
```

For more information about the SMP/E APPLY or REPORT MISSINGFIX commands, see the [SMP/E Commands](#) book. For a discussion on how fix categories can be used to replace the service recommendation section of PSP-buckets, see "[SMP/E 3.5 - Simplifying PSP buckets](#)".

How do I acquire FIXCAT HOLDDATA statements?

For all IBM product and service offerings, SMP/E FIXCAT HOLDDATA statements are supplied in the same file as ERROR HOLDDATA statements. This file is available using SMP/E RECEIVE ORDER, ShopzSeries, ServiceLink, CBPDO, ProductPac, ServerPac, SystemPac, and on the [HOLDDATA website](#) (full 2 year file only).

Fix category descriptions

The following tables identify and describe the fix category values currently used by IBM.

Installation categories

The following fix categories identify fixes that are recommended when installing or deploying new software product release levels.

Fix categories	Description
IBM.Coexistence.z/OS.V1R10	Fixes that allow z/OS V1.8 and z/OS V1.9 to coexist with, and fallback from, z/OS V1.10.
IBM.Coexistence.z/OS.V1R11	Fixes that allow z/OS V1.9 and z/OS V1.10 to coexist with, and fallback from, z/OS V1.11.
IBM.Coexistence.z/OS.V1R12	Fixes that allow z/OS V1.10 and z/OS V1.11 to coexist with, and fallback from, z/OS V1.12.
IBM.Coexistence.z/OSMF.V1R12	Fixes that allow z/OSMF V1.11 to coexist with, and fallback from, z/OSMF V1.12.
IBM.Coexistence.ICSF.z/OS_V1R9-V1R11-HCR7770	Fixes that allow prior levels of ICSF to coexist with, and fallback from, the Cryptographic Support for z/OS V1.9-V1.11 web deliverable (FMID HCR7770).
IBM.ProductInstall-RequiredService	Fixes that must be installed for an IBM product at the time the product is installed.
IBM.TargetSystem-RequiredService.z/OS.V1R11	Fixes required on other IBM products to allow them to run on z/OS V1.11.
IBM.TargetSystem-RequiredService.z/OS.V1R12	Fixes required on other IBM products to allow them to run on z/OS V1.12.
IBM.TargetSystem-RequiredService.z/OSMF.V1R11	Fixes required on other IBM products to enable z/OSMF V1.11 to run.
IBM.TargetSystem-RequiredService.z/OSMF.V1R12	Fixes required on other IBM products to enable z/OSMF V1.12 to run.


The complete list of fix categories is on the web:

<http://www-03.ibm.com/systems/z/os/zos/smpe/fixcategory.html>

Lab Agenda

- Upgrade existing SMP/E Global, target, and distribution zones to the new SMP/E V3.5 level.
- Run an SMP/E RECEIVE command to process the new FIXCAT HOLDDATA
- Use the Fix Category Explorer to create a persistent list of categories that you are interested in
- Run a REPORT MISSINGFIX command to identify
 - z10 maintenance not currently installed
 - Coexistence maintenance for z/OS V1.10 not currently installed
 - Software PSP bucket maintenance not currently installed
- Use the SMP/E ISPF Command Generation Dialogs to run a REPORT MISSINGFIX command

Environment

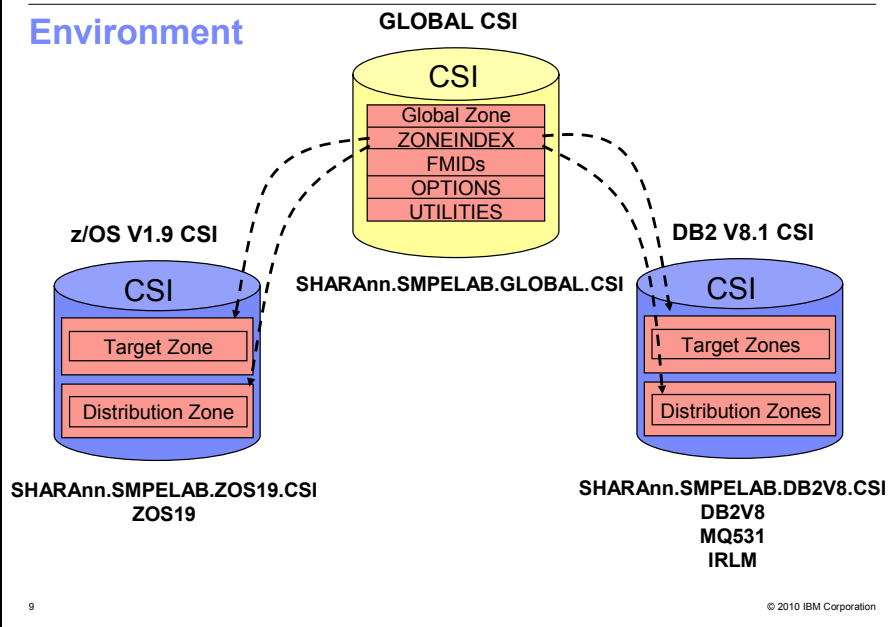

Exercise Steps

1. Log on to Poughkeepsie system
2. Use the SMP/E ISPF Dialog to verify your copy of the SMP/E GLOBAL CSI data set is correct
3. Run the SMP/E RECEIVE command to process HOLDDATA
4. Run the SMP/E UPGRADE command to enable SMP/E to process FIXCAT HOLDDATA
5. Use the SMP/E ISPF Dialog to verify that the UPGRADE level of you GLOBAL zone has changed
6. Rerun the edited RECEIVE job

Exercise Steps

1. Log on to Poughkeepsie SHARE/EXPO system
 - a. Enter "TSO" from the PCOM emulation session
 - b. Enter the USERID that you were given
 - c. On the TSO/E Logon panel enter the password, FIRSTPW
2. Use the SMP/E ISPF Dialog to verify your copy of the SMP/E GLOBAL CSI data set is correct
 - a. Query the GLOBAL zone entry
 - b. Exit the dialog
3. Run the SMP/E RECEIVE command to process HOLDDATA
 - a. Edit the JCL to RECEIVE the HOLDDATA, changing USERID to your userid
 - b. Submit the job
 - c. Save the JCL changes
 - d. Go to SDSF to view output
 - e. Notice the SMP/E warning message that was produced
4. Run the SMP/E UPGRADE command to enable SMP/E to process FIXCAT HOLDDATA
 - a. Submit the UPGRADE job, changing USERID to your userid
5. Use the SMP/E ISPF Dialog to verify that the UPGRADE level of you GLOBAL zone has changed
 - a. Query the GLOBAL zone entry
6. Rerun the edited RECEIVE job
 - a. Submit the edited job
 - b. Go to SDSF to view output
 - c. Notice that the command now got a zero (0) return code, and that numerous FIXCAT HOLDS were processed

Exercise Steps


7. Invoke the Fix Category Explorer to express a persistent interest in all z10-related categories, coexistence support and target system requisites for z/OS V1.11, and recommended service as identified in software PSP buckets.
8. Run the SMP/E REPORT MISSINGFIX command to identify if any z10 maintenance is not installed.
9. Run the SMP/E REPORT MISSINGFIX command to identify if any z/OS V1.10 coexistence maintenance that is not installed in the z/OS V1.9 target zone.
10. Run the SMP/E REPORT MISSINGFIX command to identify if any maintenance identified in a software PSP bucket that is not installed.
11. Use the SMP/E ISPF Command Generation Dialog to run a REPORT MISSINGFIX for the your persistent interest list

7. Use ISPF to invoke the Fix Category Explorer to create a persistent interest list containing all z10-related categories, coexistence support for z/OS V1.11, target system requisites for z/OS V1.11 and z/OSMF V1.11, and recommended service as identified in software PSP buckets.
 - a. Invoke the SMP/E Administration ISPF Dialog to update the OPTIONS entry with a list of fix categories that we are interested in
 - i. Go to Administration
 - ii. Definition for the GLOBAL zone
 - iii. Select OPTIONS and the GOPT entry, then HOLDDATA followed by FIXCAT
 - iv. Specify **YES** for Explore Fix Categories? ==> ___ (YES or NO)
 - b. Notice categories identified as NEW
 - c. Issue the "C" primary command to collapse all categories
 - d. Issue the "E" line command to expand the categories one level
 - e. Expand all the IBM.Device.Server categories
 - f. Issue the "F" (find) primary command for z10 to find the z10 related categories
 - g. Issue the "S" line commands to select the z10 related fix categories
 - h. Notice the implicitly selected fix categories
 - i. Issue the "C" primary or line command to collapse the IBM.Device.Server categories
 - j. Issue the "S" line command for z/OS coexistence (IBM.Coexistence.z/OS.V1R10) and IBM.ProductInstall-RequiredService to express an interest in those categories
 - k. Save the persistent list
 - l. Exit the SMP/E ISPF dialog
8. Run the SMP/E REPORT MISSINGFIX command to identify if any z10 maintenance is not installed.
 - a. Edit the JCL member MISSZ10, changing USERID to your userid
 - b. Submit the job
 - c. Go to SDSF to view output
 - d. Notice the SMP/E output fixes not installed, fixes not received
 - e. Notice the punched jobs
9. Run the SMP/E REPORT MISSINGFIX command to identify if any z/OS V1.10 coexistence maintenance that is not installed in the z/OS V1.9 target zone.
 - a. Edit the JCL member MISSZOS, changing USERID to your userid
 - b. Submit the job
 - c. Go to SDSF to view output
 - d. Notice the SMP/E output fixes not installed, fixes not received
 - e. Notice the punched jobs


-
10. Run the SMP/E REPORT MISSINGFIX command to identify if any maintenance identified in a software PSP bucket that is not installed.
 - a. Edit the JCL member MISSPSP, changing USERID to your userid
 - b. Submit the job
 - c. Go to SDSF to view output
 - d. Notice the SMP/E output fixes not installed, fixes not received
 - e. Notice the punched jobs
 11. Use the SMP/E ISPF Command Generation Dialog to run a REPORT MISSINGFIX for the your persistent interest list

1. Logon to the Poughkeepsie SHARE/EXPO system

From the PCOMM session, enter "TSO"

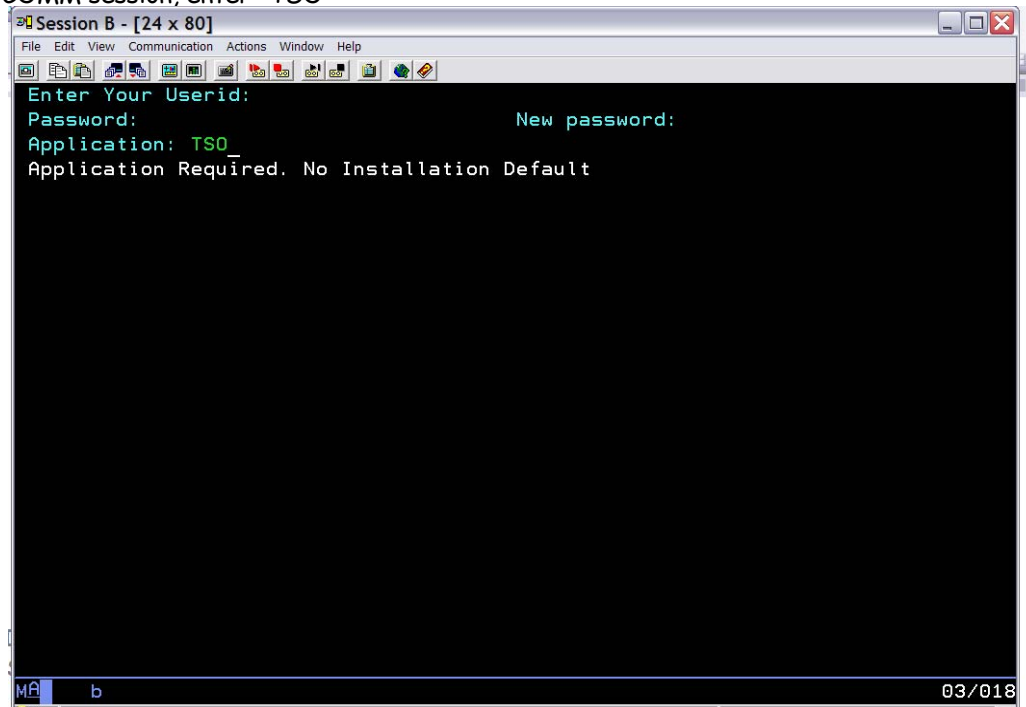

Enter the TSO USERID assigned to your seat. Userids SHARA01 - SHARA30 have been set up for this lab. For example for USERID SHARA01:

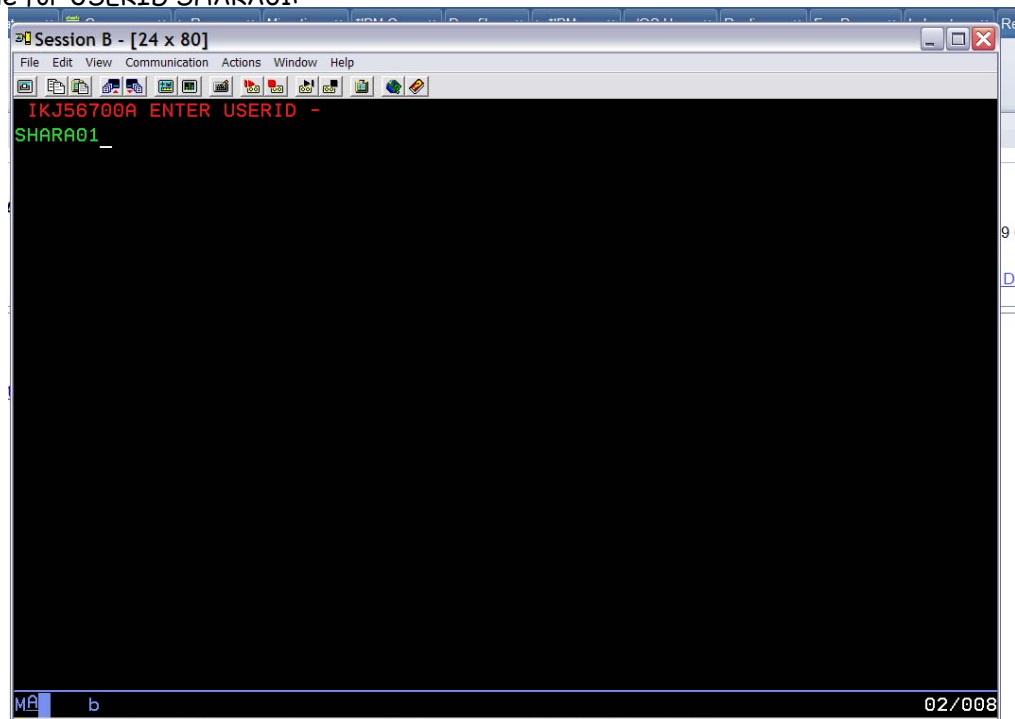

Enter the USERID and password. The password is 'FIRSTPW'.

```

Session B - [24 x 80]
File Edit View Communication Actions Window Help
----- TSO/E LOGON -----

Enter LOGON parameters below:                                RACF LOGON parameters:

Userid   ==> SHARA01
Password ==> _
Procedure ==> SHARE
Acct Nmbr ==> SHR
Size     ==>
Perform  ==>
Command  ==> ISPF

Enter an 'S' before each option desired below:
-Nomail      -Nonotice  S -Reconnect  -OIDcard

PF1/PF13 ==> Help   PF3/PF15 ==> Logoff  PA1 ==> Attention  PA2 ==> Resho
You may request specific help information by entering a '?' in any entry field

MA  b 08/02
[Connected through TLS1.0 to secure remote server/host mvs1.centers.host.com using lu/pool TCPS128 and port 6001]
    
```

If instructed, on the logon panel, enter the command EX 'SHARE.CLIST(SMPELAB)'.
 2. Use the SMP/E ISPF Dialog to verify your copy of the SMP/E GLOBAL CSI data set is correct

After you've logged on and gotten into ISPF, enter "SMP" and hit enter from the Primary ISPF panel to be brought to the SMP/E ISPF Dialog.

```

Session B - [24 x 80]
File Edit View Communication Actions Window Help
----- SHARE ISPF 6.0 SCROLLABLE PRIMARY OPTION MENU ----- S1
OPTION ==> SMP _

D Alternate Dialog ==> CMD(%????)
D2 Alternate Dialog ==> PANEL(????)

The time is 9:47 a.m. on Monday, April 13, 2009 (2009.103)
Your uid is GDAYNES dsn prefix is GDAYNES proc is SHARE sys is S1

0 SETTINGS - Specify ISPF parameters
1 VIEW - View source data or output listing
1P VIEW-OE - View/Browse files in the Open Edition file system
2 EDIT - Create or change source data
2P EDIT-OE - Edit files in the Open Edition file system
3 UTILITIES - Perform utility functions
3P ISHELL-OE - Open Edition ISPF shell
4 FOREGROUND - Invoke language processors in foreground
5 BATCH - Submit job for language processing
6 COMMAND - Enter TSO command, CLIST, or REXX exec
7 DIALOG TEST - Perform dialog testing
8 LM UTILITIES - Perform library administrator utility functions
9 IBM PRODUCTS - Additional IBM program development products
10 SCLM - Software Configuration and Library Manager

Use UP and DOWN PF keys or commands to scroll MENU
MA  b 02/018
    
```

You will be brought to the following panel. Enter `SMPELAB.GLOBAL.CSI` as the `SMPCSI` data set name (no quotes needed). On the command line enter 3.1 to Query a zone.

```

Session B - [24 x 80]
----- SMP/E PRIMARY OPTION MENU ----- SMP/E 35.10
===> _
More: +

0 SETTINGS          - Configure settings for the SMP/E dialogs
1 ADMINISTRATION    - Administer the SMPCSI contents
2 SYSMOD MANAGEMENT - Receive SYSMODs and HOLDDATA
                    and install SYSMODs
3 QUERY             - Display SMPCSI information
4 COMMAND GENERATION - Generate SMP/E commands
5 RECEIVE           - Receive SYSMODs, HOLDDATA and
                    support information
6 MIGRATION ASSISTANT - Generate Planning and Migration Reports
7 ORDER MANAGEMENT - Manage ORDER entries in the global zone

D DESCRIBE          - An overview of the dialogs
T TUTORIAL          - Details on using the dialogs
W WHAT IS NEW       - What is New in SMP/E

Specify the name of the CSI that contains the global zone:
SMPCSI DATA SET  ===>
(Leave blank for a list of SMPCSI data set names.)

Specify YES to have DD statements for SYSOUT and temporary
b
02/007

```

From the Query panel, enter `GLOBAL` as the zone name and `GZONE` as the entry

```

Session A - [24 x 80]
----- CSI QUERY -----
===>

Specify the zone, entry type, and name to be queried:

ZONE NAME  ===> GLOBAL  Name of the zone to be queried.
                    To display a list of all zones,
                    leave blank

ENTRY TYPE  ===> GZONE  Entry type to be queried.
                    To display a list of all valid
                    entry types, leave ENTRY TYPE
                    and ENTRY NAME blank

ENTRY NAME  ===>        Entry name to be queried.
                    Leave blank or use a wildcard
                    (entry name pattern) to display
                    a selection list.

To return to the Query selection menu, enter END .

DSLST -EDIT ISFPCU41 *GIMQU1P DSLST CMD
a
08/022

```

After pressing the Enter key, the `GLOBAL` zone entry will be displayed.

1. First, look at the "UPGRADE LEVEL". It should be `SMP/E 34.30`.
2. Second, notice that a number of target and `DLIB` zones have been defined to this `GLOBAL` zone. These identify target and `DLIB` zones for `z/OS V1.9`, `DB2 V8.1`, `MQ V5.3.1` and `IRLM`.
3. Finally, (if you are interested) you can scroll through the list of `SRELS` and `FMIDs` to see the `FMIDs` that have been defined to this `GLOBAL` zone. `SMP/E` will only process `HOLDDATA` for `FMIDs` defined to the `GLOBAL` zone (unless `BYPASS` is specified on the `RECEIVE` command).

```

Session A - [24 X 80]
File Edit View Communication Actions Window Help
-----
CSI QUERY - ZONE ENTRY                               Row 1 of 59
SCROLL ==> CSR

==> _
To return to the previous panel, enter END .

Primary Command: FIND

Entry Type: GZONE                               Zone Name: GLOBAL
Entry Name: GLOBAL                               Zone Type: GLOBAL

Default OPTIONS: GOPT                               Related Zone:
UPGRADE LEVEL: SMP/E 34,30

-----
ZONES  DB2V8D  DB2V8T  DLIB    IRLMD    IRLMT    MQ531D  MQ531T
TARGET ZOS19D  ZOS19T
SRELS  C150    P115    Z038
FMIDS  EDU1H01 EER3500 EMI2220 ETI1106 FDU1H07 FDU1H08 FDU1H09
HAAA120 HAC7810 HADD810 HADE810 HADF810 HADG810 HADL910
HADQ910 HADR910 HAD0910 HBB7740 HBCNC00 HBCND0B HBD6602
HBKM300 HBKP300 HBKQ320 HCKZ210 HCMG110 HCM1910 HCPT390
HCRY740 HCR7740 HCSC110 HCS7740 HDAS810 HDB661A HDB6610
DSLIST -EDIT  ISFPCU41 *GIMQIT1 DSLIST  CMD
-----
02/007

```

Exit the SMP/E ISPF dialog either by depressing the F4 key followed by the F3 key; or simply enter '=' on the command line and depress the enter key.

3. Run the SMP/E RECEIVE command to process HOLDDATA

Edit the userid.JCL data set (again).

1. Edit member RECEIVE (for example "SHARA01.JCL(RECEIVE)") to run the SMP/E RECEIVE command to process a HOLDDATA file. Change all references of "USERID" to userid that you logged on with. For example, you can use the following change command: "C USERID SHARA01 all" (Please remember to use caps for your userid).
2. Once all references have been changed, submit the job and save your changes to the JCL job.
3. You can go into SDSF look at the output.
 - SDSF is Option "S" from the ISPF primary command
 - Once in SDSF, enter the following commands
 - a. "OWNER userid" where userid is the ID that you logged on with
 - b. "PREFIX *" to enable any jobname submitted by you to be displayed
 - Enter "H ALL" to see all jobs on the held output queue or "DA" to see jobs currently executing
 - Use the "S" line command to select the job that you want to view.
4. You should receive the following messages:
 - GIM58903W SMP/E COULD NOT PROCESS A ++HOLD FIXCAT MCS BECAUSE IT WOULD HAVE MADE A CHANGE TO THE GLOBAL ZONE THAT CANNOT BE PROCESSED COMPLETELY BY PRIOR LEVELS OF SMP/E. USE THE UPGRADE COMMAND TO ALLOW SMP/E TO MAKE SUCH CHANGES.
 - GIM20501I RECEIVE PROCESSING IS COMPLETE. THE HIGHEST RETURN CODE WAS 04.

4. Run the SMP/E UPGRADE command to enable SMP/E to process the FIXCAT HOLDDATA

Edit the userid.JCL data set again, this time member UPGRADE.

1. Edit member UPGRADE (for example "SHARA01.JCL(UPGRADE)") to run the SMP/E UPGRADE command against all the SMP/E zones. Change all references of "USERID" to userid that you logged on with. For example, you can use the following change command: "C USERID SHARA01 all" (Please remember to use caps for your userid).
2. Once all references have been changed, submit the job.
3. You can go into SDSF look at the output. For each zone processed, you should receive the message: "GIM20501I UPGRADE PROCESSING IS COMPLETE. THE HIGHEST RETURN CODE WAS 00."

5. Use the SMP/E ISPF Dialog to (a) verify that the UPGRADE level of you GLOBAL zone has changed.

Now go back into the SMP/E ISPF Dialogs. The GLOBAL zone CSI data set name that you entered earlier should be remembered.

Perform the GZONE query that you did before you ran the UPGRADE command and notice that the UPGRADE level has changed. It is now UPGRADE LEVEL: SMP/E 35.27.

```

====> _
                                CSI QUERY - ZONE ENTRY
                                Row 1 to 9 of 59
                                SCROLL ==> PAGE

To return to the previous panel, enter END .

Primary Command: FIND

Entry Type:   GZONE                Zone Name: GLOBAL
Entry Name:   GLOBAL              Zone Type: GLOBAL

Default OPTIONS: GOPT          Related Zone:
UPGRADE LEVEL: SMP/E 35.27

-----
ZONES  DB2V8D  DB2V8T  DLIB    IRLMD   IRLMT   MQ531D  MQ531T
TARGET ZOS19D  ZOS19T
SRELS  C150     P115    Z038
FMIDS  EDU1H01  EER3500 EMI2220 ETI1106 FDU1H07 FDU1H08 FDU1H09
      HAAA120 HAC7810 HADD810 HADE810 HADF810 HADG810 HADL910
      HADQ910 HADR910 HAD0910 HBB7740 HBCNC00 HBCND0B HBD6602
      HBKM300 HBKP300 HBKQ320 HCKZ210 HCMG110 HCM1910 HCPT390
      HCRY740 HCR7740 HCSC110 HCS7740 HDAS810 HDB661A HDB6610
      HDB771A HDB771N HDB771W HDB7710 HDB881A HDB8810 HDB9910

```

6. Re-Run the SMP/E RECEIVE command to process HOLDDATA

Once the upgrade command has completed successfully for each zone, submit the RECEIVE job again. This time the output should be different. The first thing that you may notice is that the job took longer to run. The next thing is that it produced over 50,000 lines of output. You should check the SMPDOUT output for the message: "GIM20501I RECEIVE PROCESSING IS COMPLETE. THE HIGHEST RETURN CODE WAS 00.". If you have time, you should also look at the SMPHRPT output (the big 53K line output) and find the word "CATEGORY". You will see that the FIXCAT HOLDDATA was processed for the FMIDs defined in the global zone.

7. Use the Fix Category Explorer to express a persistent interest in all z10-related categories, coexistence support for z/OS V1.11, target system requisites for z/OS V1.11 and z/OSMF V1.11, and recommended service as identified in software PSP buckets.

We will now use the Fix Category Explorer to create a persistent interest list. The following is a subset of the information documented in the SMP/E manuals.

Manage a Persistent Fix Category Interest List

The Administration dialog can be used to display, update, and define entries in the GLOBAL zone, a target zone, or a distribution zone. It can also be used to create a new target or distribution zone. One of the entries in the GLOBAL zone that can be updated is the OPTIONS entry.

An OPTIONS entry defines processing options that are to be used for an SMP/E command or set of commands. Although OPTIONS entries exist in the GLOBAL zone, they are also used to process commands for the target and distribution zones.

The FIXCAT subentry specifies a list of Fix Categories. Fix Category values can be 1 to 64 characters in length, can contain any non-blank character in the range X'41' - X'FE' except single quote ('), comma (,), left parenthesis ((), and right parenthesis ()), and may be specified in two ways:

- Explicitly, by fully specifying a particular Fix Category value.
- Implicitly, by partially specifying a Fix Category value using any number of asterisks (*) as generic characters and percent signs (%) as placeholders.

The Fix Category Explorer is a new SMP/E dialog that allows you to view and select from a list of Fix Category values in a structured manner. The Fix Category Explorer takes advantage of the hierarchical form of the Fix Category values to allow the user to navigate the list of Fix Categories similar to how the navigation pane of Windows Explorer allows a user to navigate the directories and files of a hierarchical file system.

More specifically, the naming convention for Fix Categories uses dot-qualified hierarchical values of the form

`FirstLQ.SecondLQ.ThirdLQ. . . . NthLQ`

That is, qualifiers are separated by dots (periods), allowing as many qualifiers as can fit within a maximum of 64 characters. For example, the Fix Category value IBM.Device.Server.z9-EC-2094 has three qualifiers, where IBM is the first level qualifier, Device is the second level qualifier, and Server is the third level qualifier, and "z0-EC-2094" is the fourth qualifier. The Fix Category Explorer panels display the Fix Categories by exploiting this dot-qualified hierarchical scheme. Fix Category values displayed can be considered "parent" or "child" values. A parent value is constructed from one or more qualifiers of a complete Fix Category value. For example, IBM is the parent value for IBM.Device which in turn is the parent value for IBM.Device.Server.

Please note that while the naming convention is similar to the data set naming conventions, there are differences in that the Fix Category names are less restrictive. Specifically, the maximum number of characters is 64 (not 44), each qualifier can have more than 8 characters, and there isn't any restriction on the leading characters of a Fix Category.

IBM Training

Administration Dialog – Update OPTIONS entry

```

DEFINITION - OPTIONS ENTRY ZOSOPT
===> _
Select one of the following:

  1 UTILITY - Modify data related to the utility programs invoked by
              SMP/E.
  2 RECOVERY - Modify data related to the SMP/E recovery processing after
              error conditions.
  3 CLEANUP - Modify data related to the SMP/E data set cleanup
              operations after SMP/E processing.
  4 GENERAL - Modify data related to general SMP/E operations and output
              format.
  5 DSSPACE/ - Modify space allocation and/or the data name prefix for
    DSPREFIX  SMPTLIB data sets.
  6 ZONE GROUP - Modify data related to the SMP/E RECEIVE processing of
              SYSMODs previously accepted and/or applied.
  7 HOLDDATA - Modify information related to HOLDDATA processing during
              the APPLY, ACCEPT and REPORT MISSINGFIX commands.
    
```

23 | What's New in SMP/E V3.5? | © 2009 IBM Corporation

Administration Dialog Options Entry, FIXCAT Subentry

Within the SMP/E administration dialog for the options entry, the existing HOLDDATA selection was updated to manage persistent fix category interest lists. Selecting "7" on the panel above, will display the updated panel shown below. Selecting "2" on the panel below will enable you to define, or update, the persistent list of fix categories that will become the default when this OPTIONS entry is in use during APPLY, ACCEPT, or REPORT MISSINGFIX commands.

IBM Training

Administration Dialog – Update OPTIONS entry


```

----- OPTIONS ENTRY ZOSOPT - HOLDDATA Reporting -----
===> _
Select one of the following:

  1 SUPPHOLD - Specify Reason IDs for which the HOLDDATA image is to be
              suppressed in the APPLY and ACCEPT command HOLDDATA reports.
  2 FIXCAT - Specify the Fix Categories whose HOLDDATA will affect APPLY,
              ACCEPT and REPORT MISSINGFIX command processing.

To return to previous panel, enter END .
    
```


24 | What's New in SMP/E V3.5? | © 2009 IBM Corporation

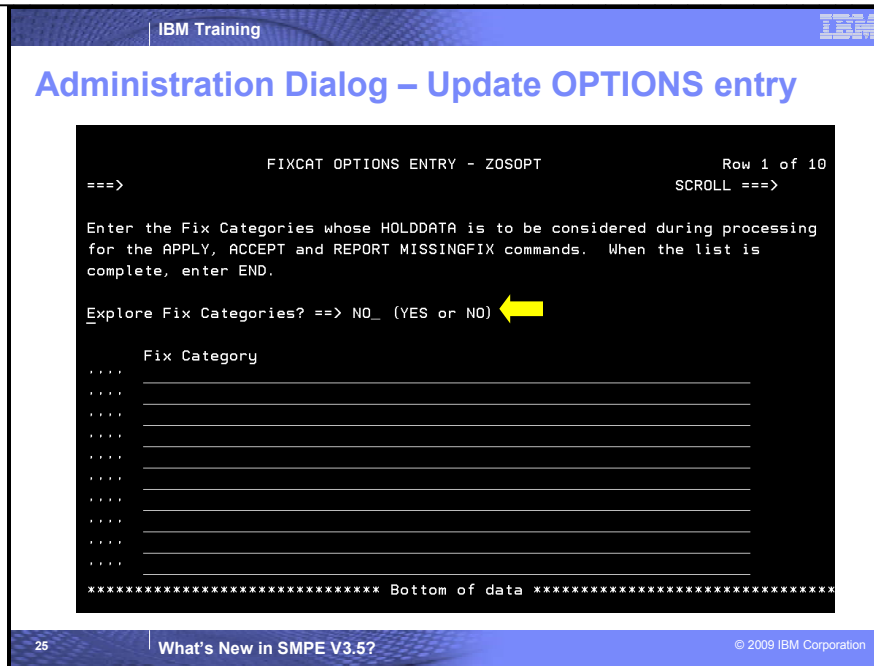

Administration Dialog Options Entry, FIXCAT Subentry

This panel allows you to specify a list of Fix Categories who's HOLDDATA is to be considered during APPLY, ACCEPT and REPORT command processing, or to use the Fix Category Explorer to view and select Fix Category values. If no FIXCAT subentry exists in the current OPTIONS entry, then the display will be empty. Otherwise the existing subentry list values will be displayed.

If you specify YES to enter the Fix Category Explorer (as shown below), you may view and select from a list of all Fix Category values from all FIXCAT HOLDS (next set of slides). In addition, new Fix Category values will be identified.

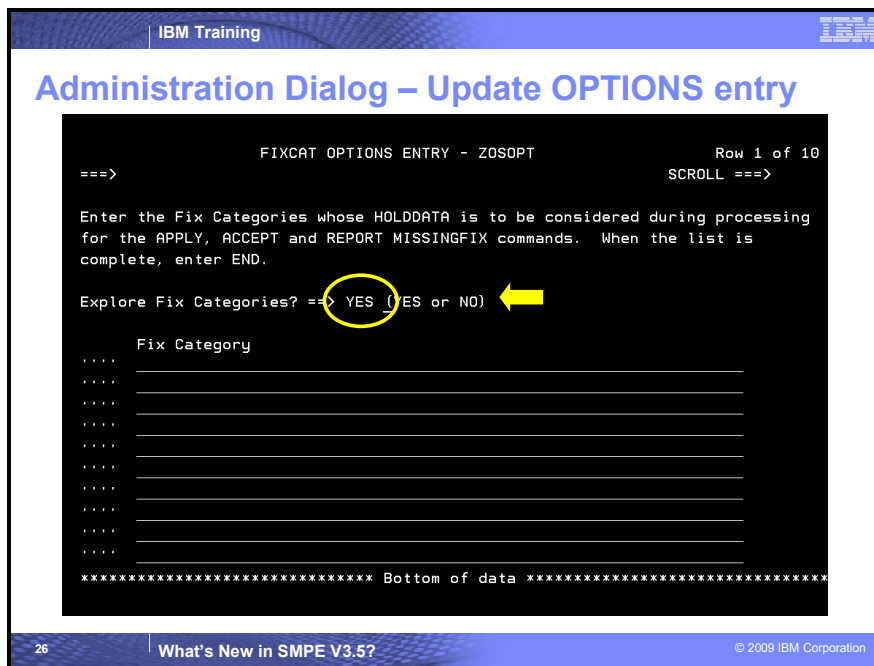

IBM Training

Administration Dialog – Update OPTIONS entry

```

----- Fix Category Explorer ----- Row 1 to 13 of 112
====> _                               SCROLL ==> PAGE
Commands: FIND -Find a string, E -Expand all, C -Collapse all, U -Unselect all
Actions: E -Expand, C -Collapse, S -Select, U -Unselect, V -View patterns
NEW indicates a Fix Category is new since

Fix Categories
-----
-IBM.*                               NEW
-IBM.Coexistence.*                   NEW
-IBM.Coexistence.ICSF.*              NEW
  IBM.Coexistence.ICSF.z/OS_V1R9-V1R11-HCR7770  NEW
-IBM.Coexistence.z/OS.*              NEW
  IBM.Coexistence.z/OS.V1R10           NEW
  IBM.Coexistence.z/OS.V1R11           NEW
  IBM.Coexistence.z/OS.V1R12           NEW
-IBM.Device.*                         NEW
  -IBM.Device.CommunicationController.*  NEW
    IBM.Device.CommunicationController.3745  NEW
-IBM.Device.Disk.*                    NEW
  IBM.Device.Disk.DS8000-2107           NEW

```

27 | What's New in SMP/E V3.5? | © 2009 IBM Corporation

First time everything is displayed as "NEW"

Fix Category Explorer

When a user enters the Fix Category Explorer while updating an OPTIONS entry, all Fix Category values that are new and have not been viewed previously will be marked as NEW in the display. That is, all FIXCAT HOLD entries will be read from the GLOBAL zone and all Fix Category values will be collected from those HOLD entries. This list of Fix Category values will be compared to the list of saved Fix Categories in the permanent ISPF table that is unique for the current userid (this is the list of Fix Categories viewed last time). Any Fix Category values from the HOLD entries that are not in the saved list are considered new. The NEW field for such values will be set to **NEW**. The NEW field for all other values will be blank. Finally, all Fix Categories are analyzed and dissected into their various levels, or qualifiers. Appropriate parent and child values are then constructed for the Explorer display.

This display option is useful if you have traveled this path before. That is, if you choose to enter the Fix Category Explorer, the SMP/E dialog will remember all Fix Category values that are used to build the display. The next time you enter the Explorer, only the Fix Categories from new HOLDDATA received into the GLOBAL zone since the last time will be marked new in the display.

The initial display for a user's first visit (or for a user with no saved list of previously viewed Fix Categories) all values will be NEW and therefore all levels are expanded in order to expose all NEW values in the display.

IBM Training

Administration Dialog – Update OPTIONS entry

Use "E" command to expand ALL fix categories

```

----- Fix Category Explorer ----- Row 1 of 5
===> _                               SCROLL ==>

Commands: FIND -Find a string, E -Expand all, C -Collapse all, U -Unselect all
Actions: E -Expand, C -Collapse, S -Select, V -View patterns

No Fix Categories are new since 2008/07/31.

Fix Categories                               New Selected
-----
-IBM.*
+IBM.Coexistence.*
+IBM.Device.*
+IBM.Function.*
IBM.ProductInstall-RequiredService
***** Bottom of data *****
    
```

No new Fix Categories found in the GLOBAL zone

Use "E" line command to expand the list of fix categories

28 What's New in SMPE V3.5? © 2009 IBM Corporation

Fix Category Explorer

The Fix Category Explorer allows you to view and select Fix Category values from a structured display. The display takes advantage of the hierarchical form of the Fix Category values and represents all Fix Categories from all FIXCAT HOLDS found in the GLOBAL zone. It allows you to manage a persistent interest list. You can expand Fix Categories to see the more fully qualified name, as well as specify (select) an interest in a Fix Categories (or unselect it to state that you are no longer interested in that Fix Category).

IBM Training

Administration Dialog – Update OPTIONS entry

```

----- Fix Category Explorer ----- Row 1 of 13
===> _                               SCROLL ==>

Commands: FIND -Find a string, E -Expand all, C -Collapse all, U -Unselect all
Actions: E -Expand, C -Collapse, S -Select, V -View patterns

No Fix Categories are new since 2008/07/31.

Fix Categories                               New Selected
-----
-IBM.*
-IBM.Coexistence.*
+IBM.Coexistence.z/OS.*
-IBM.Device.*
+IBM.Device.CommunicationController.*
+IBM.Device.Disk.*
IBM.Device.ESCONDirector-9032
+IBM.Device.FICONDirector.*
IBM.Device.OpticalLibrary-3995
+IBM.Device.Server.*
+IBM.Device.Tape.*
+IBM.Function.*
IBM.ProductInstall-RequiredService
    
```

The list of IBM coexistence categories expanded by one qualifier

The list of IBM devices is expanded by one qualifier

29 What's New in SMPE V3.5? © 2009 IBM Corporation

IBM Training

Administration Dialog – Update OPTIONS entry

Can use the FIND command to locate z10 Fix Categories

```
----- Fix Category Explorer ----- Row 1 of 28
===> _ SCROLL ==>

Commands: FIND -Find a string, E -Expand all, C -Collapse all, U -Unselect all
Actions: E -Expand, C -Collapse, S -Select, U -Unselect, V -View patterns

No Fix Categories are new since 2008/07/31.

Fix Categories New Selected
-----
-IBM.*
-IBM.Coexistence.*
+IBM.Coexistence.z/OS.*
-IBM.Device.*
+IBM.Device.CommunicationController.*
+IBM.Device.Disk.*
IBM.Device.ESCONDirector-9032
+IBM.Device.FICONDirector.*
IBM.Device.OpticalLibrary-3000
-IBM.Device.Server.*
IBM.Device.Server.CouplingFacility-9674
IBM.Device.Server.ParallelTransactionServer-9672
IBM.Device.Server.s/390Multiprise3000-7060
```

The list of IBM servers is expanded by one qualifier

30 | What's New in SMPE V3.5? | © 2009 IBM Corporation

IBM Training

Administration Dialog – Update OPTIONS entry

Use the "S" line command to express an interest in the Fix Category

```
----- Fix Category Explorer ----- CHARS 'Z10' FOUND
===> _ SCROLL ==>

Commands: FIND -Find a string, E -Expand all, C -Collapse all, U -Unselect all
Actions: E -Expand, C -Collapse, S -Select, U -Unselect, V -View patterns

No Fix Categories are new since 2008/07/31.

Fix Categories New Selected
-----
s IBM.Device.Server.z10-EC-2097
s +IBM.Device.Server.z10-EC-2097.*
IBM.Device.Server.z800-2066
IBM.Device.Server.z890-2086
+IBM.Device.Server.z890-2086.*
IBM.Device.Server.z9-BC-2096
+IBM.Device.Server.z9-BC-2096.*
IBM.Device.Server.z9-EC-2094
+IBM.Device.Server.z9-EC-2094.*
IBM.Device.Server.z900-2064
IBM.Device.Server.z990-2084
+IBM.Device.Server.z990-2084.*
+IBM.Device.Tape.*
```

31 | What's New in SMPE V3.5? | © 2009 IBM Corporation

IBM Training

Administration Dialog – Update OPTIONS entry

```

----- Fix Category Explorer ----- Row 14 of 35
==> _                               SCROLL ==>

Commands: FIND -Find a string, E -Expand all, C -Collapse all, U -Unselect all
Actions: E -Expand, C -Collapse, S -Select, S* -Select all patterns
No Fix Categories are new since 2008/01/01

Fix Categories
-----
IBM.Device.Server.z10-EC-2097                               SELECTED
-IBM.Device.Server.z10-EC-2097.*                            SELECTED
  IBM.Device.Server.z10-EC-2097.CapacityProvisioning        *
  IBM.Device.Server.z10-EC-2097.DecimalFloatingPoint        *
  IBM.Device.Server.z10-EC-2097.MIDAN                        *
  IBM.Device.Server.z10-EC-2097.ParallelSysplexInfiniBandCou *
  IBM.Device.Server.z10-EC-2097.ServerTimeProtocol          *
  IBM.Device.Server.z10-EC-2097.zAAP                        *
  IBM.Device.Server.z10-EC-2097.zIIP                        *
IBM.Device.Server.z800-2066
IBM.Device.Server.z890-2086
+IBM.Device.Server.z890-2086.*
IBM.Device.Server.z9-BC-2096
    
```

Fix Categories covered by a selected generic entry are implicitly selected and displayed with an asterisk (*)


32 | What's New in SMPe V3.5? | © 2009 IBM Corporation

Fix Category Explorer (continued)

If one or more Fix Categories are already specified in the OPTIONS subentry, they will be pre-selected in the Fix Category Explorer display.

Specifying "S" on a row that is not already explicitly selected, or is implicitly selected by a match (its **Selected** field is either blank or *), will set that Fix Category to **SELECTED**. In addition, if the current row is a parent Fix Category value, then all of its children that are not already explicitly selected, will be implicitly selected. The **Selected** field for all such child Fix Categories will be set to asterisk (*), and then the table is redisplayed.

Note: Even though the **Selected** field for a child is set to asterisk (*), the display state of child rows is not affected by the Select command for a parent. That is, if a parent row is currently collapsed, its children will be implicitly selected, but they will remain hidden from view until the parent row is expanded.

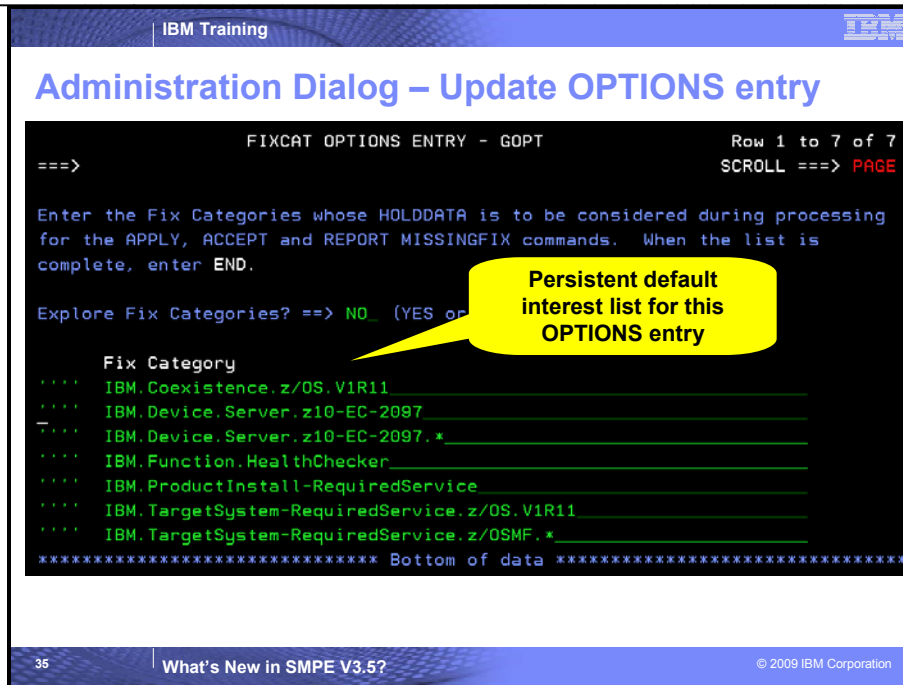

Fix Category Explorer (continued)

If either the END or RETURN command is processed, the list of Fix Categories displayed will be saved and used later to determine which Fix Categories will be marked "new" the next time this user chooses the NEW option of the Fix Category Explorer, and the selected Fix Categories will be stored in the FIXCAT subentry of the subject options entry.

8. Run the SMP/E REPORT MISSINGFIX command to identify if any z10 maintenance is not installed

Edit the userid.JCL data set.

- a. Edit member MISSZ10 (for example "SHARA01.JCL(MISSZ10)") to run the SMP/E REPORT MISSINGFIX command to identify any maintenance needed to run on or exploit either a z10 EC or z10 BC server that is not installed. Change all references of "USERID" to userid that you logged on with. For example, you can use the following change command: "C USERID SHARA01 all" (Please remember to use caps for your userid).
- b. Once all references have been changed, submit the job and save your changes to the JCL job.
- c. You can go into SDSF look at the output. You should receive the following messages:
 - GIM20501I REPORT PROCESSING IS COMPLETE. THE HIGHEST RETURN CODE WAS 00.
 - You should get a MISSING FIXCAT SYSMOD REPORT for each zone. The report will identify that the only zone where fixes are missing is ZOS19T (the z/OS V1.9 target zone).
 - For each category with missing fixes, the FMID, APAR, fixing PTF, and status of the fixing PTF will be identified (see below)
 - For each fix that has not yet been RECEIVE'd, a sample RECEIVE ORDER job will be created to acquire those PTFs. Furthermore, for each fix not installed, a sample APPLY command is generated (with the not yet acquired service commented out).


```

Session A - [27 x 132]
File Edit View Communication Actions Window Help
-----
Display Filter View Print Options Help
-----
SDSF OUTPUT DISPLAY GDAYNESM JOB31228 DSID 107 LINE 338 COLUMNS 02- 133
COMMAND INPUT ==> _ SCROLL ==> CSR
FIX CATEGORY FMID CLASS APAR SYSMOD NAME STATUS RECEIVED
-----
IBM.Device.Server.z10-EC-2097
JCS774J AA20468 JCS774J UA90394 GOOD NO
AA24437 JCS774J UA40720 GOOD NO
AA25199 JCS774J UA42382 GOOD NO
JIP6199 AK64880 JIP6199 UK37607 GOOD NO
JPG290A AA22914 JPG290A UA39414 GOOD NO
JRM774J AA12774 JRM774J UA39279 GOOD NO
AA24074 JRM774J UA40054 GOOD NO
IBM.Device.Server.z10-EC-2097.zAAP
HBB7740 AA20633 HBB7740 UA39386 HELD NO
AA22160 HBB7740 UA38783 GOOD NO
AA23479 HBB7740 UA39225 GOOD NO
AA25733 HBB7740 UA42763 GOOD NO
AA25825 HBB7740 UA42949 GOOD NO
AA25903 HBB7740 UA44802 GOOD NO
HRM7740 AA24364 HRM7740 UA40871 GOOD NO
AA25162 HRM7740 UA42340 GOOD NO
JBB774J AA20633 JBB774J UA39389 GOOD NO
IBM.Device.Server.z10-EC-2097.zHighPerformanceFICON
EER3500 A004445 EER3500 U000849 GOOD NO
DSLIST -EDIT *ISFPCU4 ISRDIIS DSLIST CMD

```

9. Run the SMP/E REPORT MISSINGFIX command to identify if any z/OS V1.10 coexistence maintenance that is not installed in the z/OS V1.9 target zone.

Edit the userid.JCL data set.

- a. Edit member MISSZOS (for example "SHARA01.JCL(MISSZOS)") to run the SMP/E REPORT MISSINGFIX command to identify any maintenance needed to enable a z/OS V1.9 system to share resources with a z/OS V1.10 system (including in case of fallback) that is not installed. Change all references of "USERID" to userid that you logged on with. For example, you can use the following change command: "C USERID SHARA01 all" (Please remember to use caps for your userid).
- b. Once all references have been changed, submit the job and save your changes to the JCL job.
- c. You can go into SDSF look at the output. You should receive the following messages:
 - GIM20501I REPORT PROCESSING IS COMPLETE. THE HIGHEST RETURN CODE WAS 00.
 - You should get a MISSING FIXCAT SYSMOD REPORT for the ZOS19T zone. The report will identify that several coexistence fixes needed for z/OS V1.9 to coexist with z/OS V1.10 are not yet installed on the z/OS V1.9 system.
 - A similar report to what was produced for the z10 REPORT MISSINGFIX command will be produced.
 - For each fix that has not yet been RECEIVE'd, a sample RECEIVE ORDER job will be created to acquire those PTFs. Furthermore, for each fix not installed, a sample APPLY command is generated (with the not yet acquired service commented out).

```

Display Filter View Print Options Help
-----
SDSF OUTPUT DISPLAY GDAYNESM JOB31664 DSID 107 LINE 3 COLUMNS 02- 133
COMMAND INPUT ==> _ SCROLL ==> CSR
MISSING FIXCAT SYSMOD REPORT FOR ZONE ZOS19T

FIX CATEGORY FMID HOLD MISSING HELD RESOLVING SYSMOD
CLASS APAR SYSMOD NAME STATUS RECEIVED

IBM.Coexistence.z/OS.V1R10
HBB7740 AA17252 HBB7740 UA39716 HELD NO
AA23153 HBB7740 UA39874 GOOD NO
AA24850 HBB7740 UA40988 GOOD NO
AA25013 HBB7740 UA41279 GOOD NO
HCS7740 AA22842 HCS7740 UA90386 GOOD NO
HDZ119N AA24257 HDZ119N UA40245 GOOD NO
HDZ1190 AA21487 HDZ1190 UA40229 GOOD NO
AA22026 HDZ1190 UA39934 GOOD NO
AA22211 HDZ1190 UA39940 GOOD NO
AA22400 HDZ1190 UA39959 GOOD NO
AA22449 HDZ1190 UA40221 GOOD NO
AA22804 HDZ1190 UA40306 HELD NO
AA23786 HDZ1190 UA39926 GOOD NO
AA25754 HDZ1190 UA42230 HELD NO
HJE7740 CA20935 HJE7740 UA90383 GOOD NO
HJS7740 AA21882 HJS7740 UA39863 GOOD NO

DSLIST -EDIT *ISFPCU4 ISRDIIS DSLIST CMD
    
```

Punched Sample Job

```

Session A - [27 x 132]
File Edit View Communication Actions Window Help
-----
Display Filter View Print Options Help
-----
SDSF OUTPUT DISPLAY GDAYNESM JOB31664 DSID 109 LINE 1 COLUMNS 02- 133
COMMAND INPUT ==> _ SCROLL ==> CSR
SET BDY(GLOBAL) /*

THE FOLLOWING SMP/E COMMANDS WERE GENERATED BY A REPORT MISSINGFIX
COMMAND ON 04/13/09 AT 18:33:19.

*/.
RECEIVE ORDER (
  CONTENT(ALL) /*

SMP/E RECOMMENDS ORDERING AND RECEIVING ALL APPLICABLE
PTFS. IF YOU CHOOSE NOT TO ORDER ALL, THEN ORDER ONLY
THE RESOLVING PTFS:

CONTENT(PTFS (
  UA39319 UA39334 UA39716 UA39739 UA39863 UA39874 UA39926
  UA39934 UA39940 UA39959 UA39960 UA40221 UA40229 UA40245
  UA40306 UA40988 UA41279 UA42084 UA42230 UA44807 UA90383
  UA90386 UA90388 U000701 U000702
) )

*/
ORDERSERVER(SMPOSVR) /* SPECIFY THE ORDERSERVER DDNAME. */
CLIENT (SMPCLNT) /* SPECIFY THE CLIENT DDNAME. */

DSLIST -EDIT *ISFPCU4 ISRDIIS DSLIST CMD
    
```

```

Display Filter View Print Options Help
-----
SDSF OUTPUT DISPLAY GDAYNESM JOB31664 DSID 109 LINE 23 COLUMNS 02- 133
COMMAND INPUT ==> _ SCROLL ==> CSR
)
DELETEPKG.
SET BDY(ZOS19T ).
APPLY CHECK
SELECT(
/* IBM.Coexistence.z/OS.V1R10 */
UA39319
UA39334
UA39716
UA39739
UA39863
UA39874
UA39926
UA39934
UA39940
UA39959
UA39960
UA40221
UA40229
UA40245
UA40306
UA40988
DSLIST -EDIT *ISFPCU4 ISRDIIS DSLIST CMD

```

10. Run the **SMP/E REPORT MISSINGFIX** command to identify if any maintenance identified in a software PSP bucket that is not installed.

Edit the userid.JCL data set.

- a. Edit member MISSPSP (for example "SHARA01.JCL(MISSPSP)") to run the SMP/E REPORT MISSINGFIX command to identify any maintenance identified in the Recommended Service section of a software Preventive Service Planning (PSP) bucket that is not installed. Change all references of "USERID" to userid that you logged on with. For example, you can use the following change command: "C USERID SHARA01 all" (Please remember to use caps for your userid).
- b. Once all references have been changed, submit the job and save your changes to the JCL job.
- c. You can go into SDSF look at the output. You should receive the following messages:
 - GIM20501I REPORT PROCESSING IS COMPLETE. THE HIGHEST RETURN CODE WAS 00.
 - You should get a similar report to what was produced for the z10 REPORT MISSINGFIX command. This report will identify that several recommended service fixes for DB2 V9 and z/OS V1.9 are not currently installed.
 - A similar punched job is also created.

11. Use the **SMP/E ISPF Command Generation Dialog** to run a **REPORT MISSINGFIX** for the your **persistent interest list**

Now go back into the SMP/E ISPF Dialogs. The GLOBAL zone CSI data set name that you entered earlier should still be remembered. This time choose option 4 from the SMP/E primary ISPF panel for Command Generation. The following panel will now be displayed. Enter "34" for REPORT and "GLOBAL" for the zone name, then depress the enter key.

```

      .                                     COMMAND GENERATION SELECTION MENU                                     .
      .                                     .                                     .
      . ===> 34                                     .                                     .
      . Select one of the following:                                     .                                     .
      . 10 RECEIVE      20 RESETRC      30 LIST BACKUP      40 ZONECOPY                                     .
      . 11 APPLY        21 JCLIN        31 LIST LOG        41 ZONEEDIT                                     .
      . 12 ACCEPT       22 UCLIN        32 LIST           42 ZONEDELETE                                     .
      . 13 REJECT       23 CLEANUP       33 UNLOAD         43 ZONEEXPORT                                     .
      . 14 RESTORE      24 GENERATE      34 REPORT         44 ZONEIMPORT                                     .
      . 15 LINK         25 LOG           35 BUILDMCS       45 ZONEMERGE                                     .
      .                                     26 UPGRADE       46 ZONERENAME                                     .
      .                                                                         47 GZONEMERGE                                     .
      . Enter or verify the following:                                     .                                     .
      . ZONE NAME           ===> GLOBAL      (required)                                     .
      . OPTIONS NAME       ===> _          OPTIONS name or                                     .
      .                                     blank                                     .
      . SMP/E PROCESS PARAMETER ===> WAIT    WAIT or END                                     .
      . To return to the SMP/E primary option menu enter the END command                                     .
      .
      . 5694-A01 5655-G44 COPYRIGHT IBM CORP 1982, 2008                                     .
      .
      . SFPCU4 *GIMCGPO DSLIST  CMD
  
```

You will then be presented with a panel to identify which REPORT command that you want to run:

```

      .                                     COMMAND GENERATION - REPORT SELECTION                                     .
      .                                     .                                     .
      . ===> _                                     .                                     .
      . Select one of the following:                                     .                                     .
      . 1  CROSSZONE - REPORT CROSSZONE                                     .
      . 2  ERRSYSMODS - REPORT ERRSYSMODS                                     .
      . 3  SYSMODS   - REPORT SYSMODS                                       .
      . 4  SOURCEID  - REPORT SOURCEID                                       .
      . 5  MISSINGFIX - REPORT MISSINGFIX                                     .
      .
      . To return to previous panel, enter END .
      .
      . SFPCU4 *GIMCGRP DSLIST  CMD
  
```


Select "5" for REPORT MISSINGFIX. This will bring you to the next panel. On that panel enter "NO" for FIXCAT, "NO" for FORFMID, and "NO" for NOPUNCH. If you specify "YES" for FIXCAT, you will have a opportunity to go back into the Fix Category Explorer to identify your interest list. However, that interest list is ONLY used for this command and isn't persistent.

Reference Material

If at anytime you need to recreate your own copy of SMP/E CSI data sets

Edit the userid.JCL data set.

1. Edit member *COPYMSTR* (for example "SHARA01.JCL(COPYMSTR)") to copy the master SMP/E CSIs to your own copy. Change all references of "USERID" to userid that you logged on with. For example, you can use the following change command: "C USERID SHARA01 all" (Please remember to use caps for your userid).
2. Once all references have been changed, submit the job.
3. You can go into SDSF to verify that the job ran successfully.
 - SDSF is Option "S" from the ISPF primary command
 - Once in SDSF, enter the following commands
 - c. "OWNER userid" where userid is the ID that you logged on with
 - d. "PREFIX *" to enable any jobname submitted by you to be displayed
 - Enter "H ALL" to see all jobs on the held output queue or "DA" to see jobs currently executing
 - Use the "S" line command to select the job that you want to view.

SHARE in Boston 

Trademarks

The following are trademarks of the International Business Machines Corporation in the United States, other countries, or both.

Not all common law marks used by IBM are listed on this page. Failure of a mark to appear does not mean that IBM does not use the mark nor does it mean that the product is not actively marketed or is not significant within its relevant market.

Those trademarks followed by © are registered trademarks of IBM in the United States; all others are trademarks or common law marks of IBM in the United States.

For a complete list of IBM Trademarks, see www.ibm.com/legal/copytrade.shtml:

* AS/400®, e business/logo®, DBE, ESCO, eServer, FICON, IBM®, IBM (logo)®, iSeries®, MVS, OS/390®, pSeries®, RS/6000®, S/390, VM/ESA®, VSE/ESA, WebSphere®, xSeries®, z/OS®, zSeries®, z/VM®, System i, System i2, System p, System p2, System x, System z, System z96, BladeCenter®

The following are trademarks or registered trademarks of other companies.

Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries. Cell Broadband Engine is a trademark of Sony Computer Entertainment, Inc. in the United States, other countries, or both and is used under license therefrom. Java and all Java-based trademarks are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both. Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both. Intel, Intel logo, Intel Inside, Intel Inside logo, Intel Centrino, Intel Centrino logo, Celeron, Intel Xeon, Intel SpeedStep, Itanium, and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries. UNIX is a registered trademark of The Open Group in the United States and other countries. Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both. ITIL is a registered trademark, and a registered community trademark of the Office of Government Commerce, and is registered in the U.S. Patent and Trademark Office. IT Infrastructure Library is a registered trademark of the Central Computer and Telecommunications Agency, which is now part of the Office of Government Commerce.

* All other products may be trademarks or registered trademarks of their respective companies.

Notes:

Performance is in Internal Throughput Rate (ITR) ratio based on measurements and projections using standard IBM benchmarks in a controlled environment. The actual throughput that any user will experience will vary depending upon considerations such as the amount of multiprogramming in the user's job stream, the I/O configuration, the storage configuration, and the workload processed. Therefore, no assurance can be given that an individual user will achieve throughput improvements equivalent to the performance ratios stated here.

IBM hardware products are manufactured from new parts, or new and serviceable used parts. Regardless, our warranty terms apply.

All customer examples cited or described in this presentation are presented as illustrations of the manner in which some customers have used IBM products and the results they may have achieved. Actual environmental costs and performance characteristics will vary depending on individual customer configurations and conditions.

This publication was produced in the United States. IBM may not offer the products, services or features discussed in this document in other countries, and the information may be subject to change without notice. Consult your local IBM business contact for information on the product or services available in your area.

All statements regarding IBM's future direction and intent are subject to change or withdrawal without notice, and represent goals and objectives only.

Information about non-IBM products is obtained from the manufacturers of those products or their published announcements. IBM has not tested those products and cannot confirm the performance, compatibility, or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

Prices subject to change without notice. Contact your IBM representative or Business Partner for the most current pricing in your geography.

12 © 2010 IBM Corporation