


A first look into the Inner Workings and Hidden Mechanisms of FICON Performance

- David Lytle, BCAAF
- Brocade Communications Inc.
- Tuesday March 13, 2012 – 1:30pm to 2:30pm
- Session Number - 11003



Legal Disclaimer

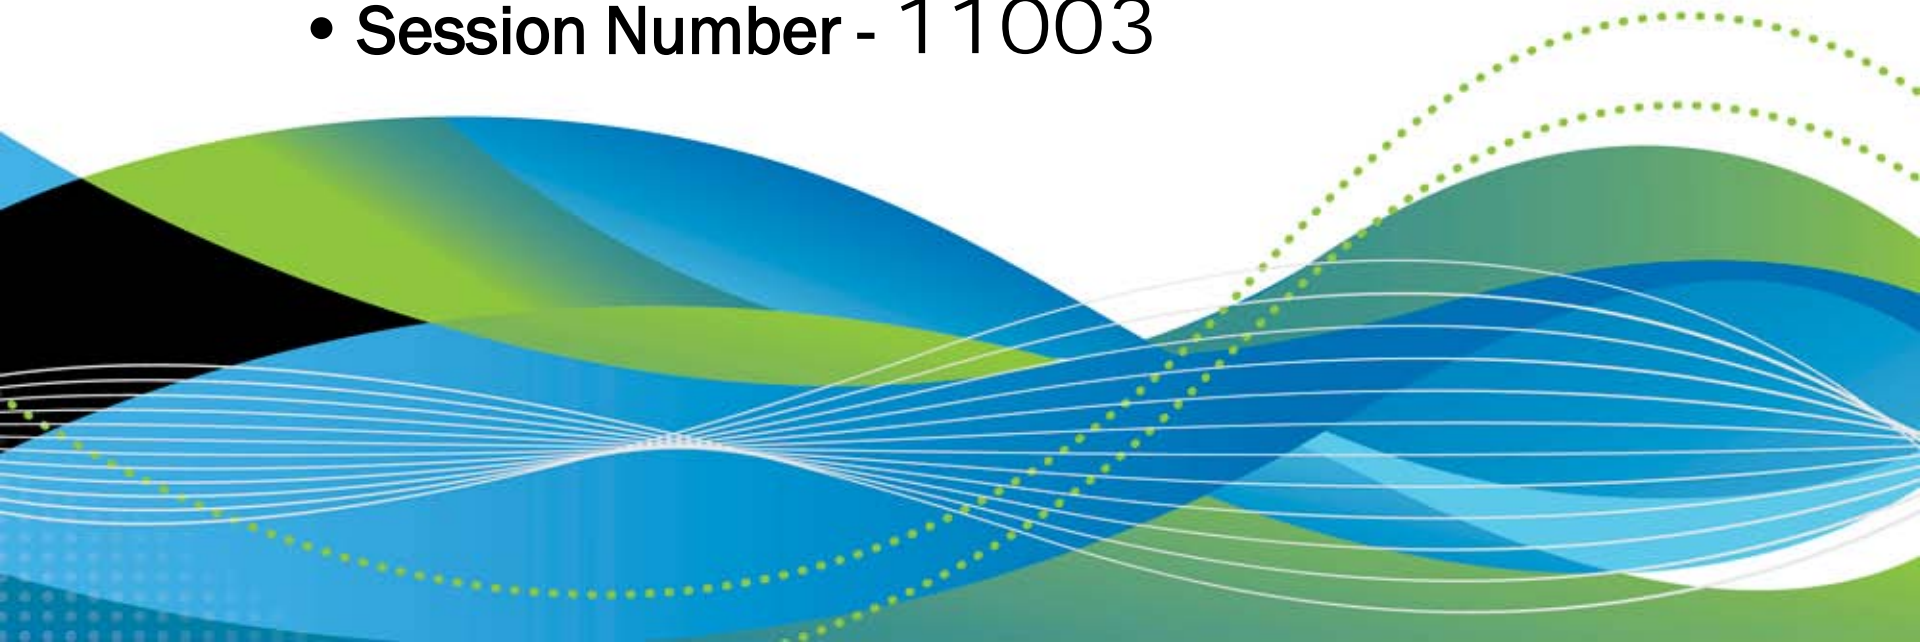

- All or some of the products detailed in this presentation may still be under development and certain specifications, including but not limited to, release dates, prices, and product features, may change. The products may not function as intended and a production version of the products may never be released. Even if a production version is released, it may be materially different from the pre-release version discussed in this presentation.
- NOTHING IN THIS PRESENTATION SHALL BE DEEMED TO CREATE A WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE, INCLUDING BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NONINFRINGEMENT OF THIRD-PARTY RIGHTS WITH RESPECT TO ANY PRODUCTS AND SERVICES REFERENCED HEREIN.
- Brocade, Fabric OS, File Lifecycle Manager, MyView, and StorageX are registered trademarks and the Brocade B-wing symbol, DCX, and SAN Health are trademarks of Brocade Communications Systems, Inc. or its subsidiaries, in the United States and/or in other countries. All other brands, products, or service names are or may be trademarks or service marks of, and are used to identify, products or services of their respective owners.
- There are slides in this presentation that use IBM graphics.





Notes as part of the online handouts

I have saved the PDF files for my presentations in such a way that all of the audience notes are available as you read the PDF file that you download.

If there is a little balloon icon in the upper left hand corner of the slide then take your cursor and put it over the balloon and you will see the notes that I have made concerning the slide that you are viewing.

This will usually give you more information than just what the slide contains.

I hope this helps in your educational efforts!



A first look into the Inner Workings and Hidden Mechanisms of FICON Performance



AGENDA – 1st Look into the Inner Workings:


- Discuss some architecture and design considerations of a FICON infrastructure.

AGENDA – Deeper Look into the Inner Workings:

- Focused more on underlying protocol concepts:
 - FICON Link Congestion
 - How Buffer Credits are used with FICON
 - Oversubscription
 - Slow Draining devices
 - RMF reporting of Buffer Credits



The

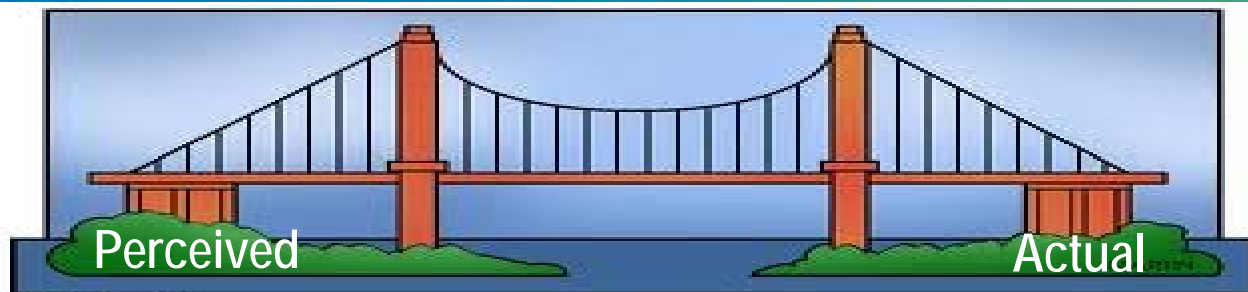


FICON GAP

**When Deploying
FICON, There Is
Often A Gap
Between What
You Expect For
Its Performance
And What You
Actually Get!**


**I Will Help You
Bridge Some Of
That Gap Here!**

End-to-End FICON/FCP Connectivity

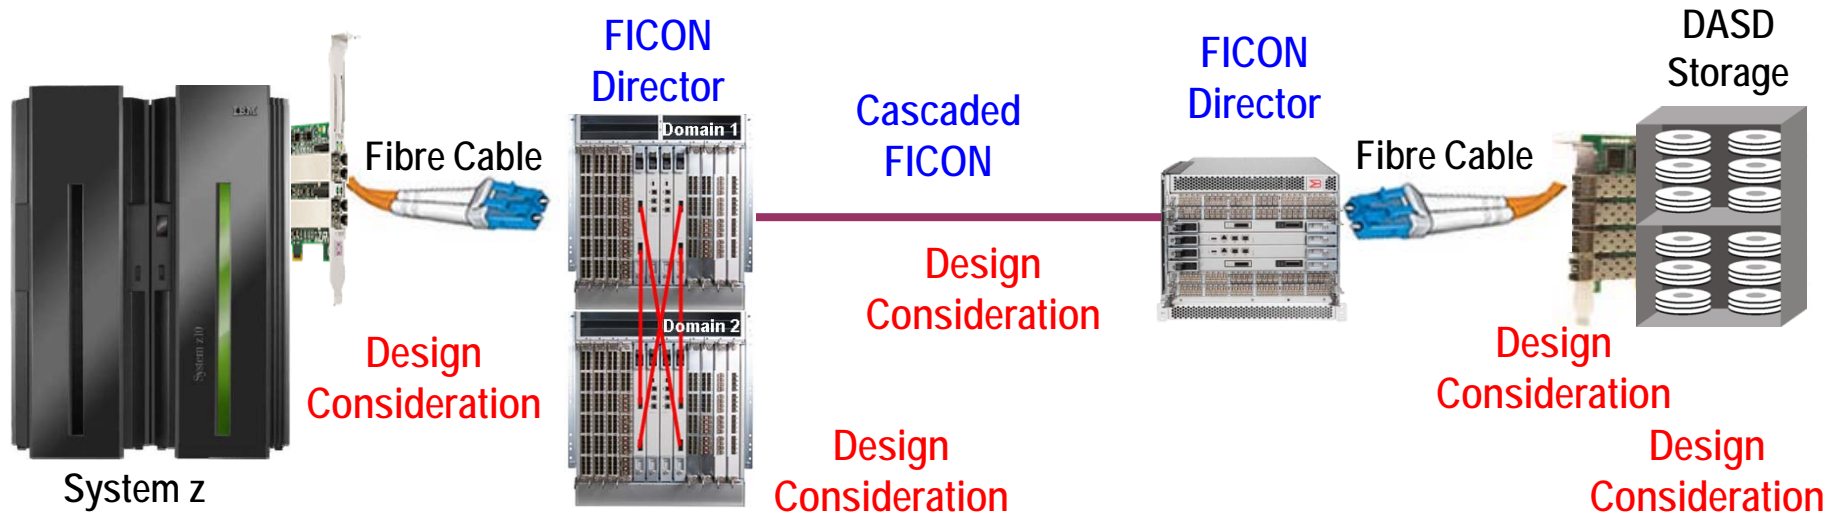


- From End-to-End in a FICON infrastructure there are a series of Design Considerations that you must understand in order to successfully satisfy your expectations with your FICON fabrics
- This short presentation is just a 50,000 foot OVERVIEW!

End-to-End FICON/FCP Connectivity

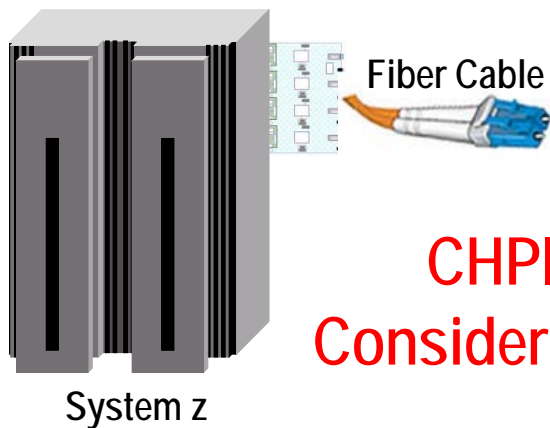

CHPID Considerations

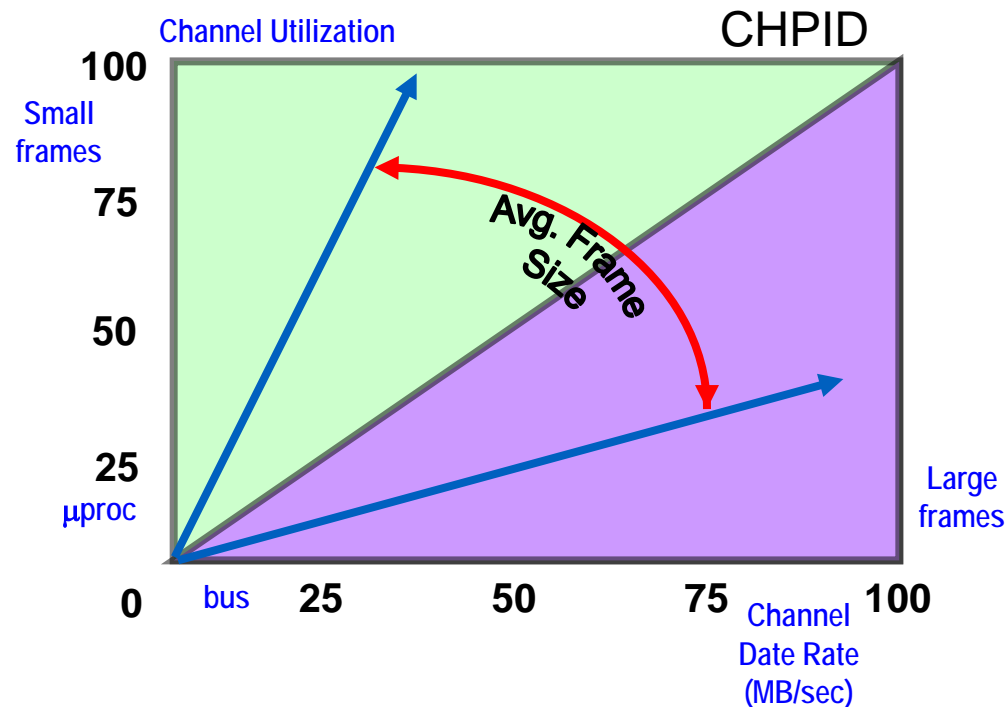

- Channel Microprocessors and PCI Bus
- Average frame size for FICON
- Buffer Credit considerations


Current Mainframe Channel Cards (Features)



FICON Express4

- z196, z114, z10, z9
- 4 ports per feature
- 4km & 10km LX
- Shortwave (SX)
- 1, 2 or 4 GBps link rate


FICON Express4 provides the last native 1Gbps CHPID support

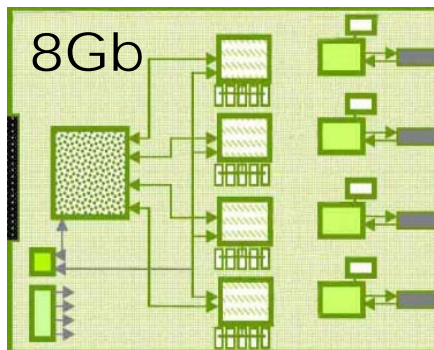

FICON Express8

- z196, z114, z10
- 4 ports per feature
- Longwave (LX) to 10km
- Shortwave (SX)
- 2, 4 or 8 GBps link rate

FICON buffer credits have become very limited per CHPID

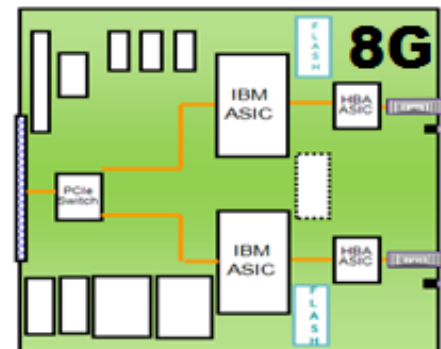


FICON Express8S

- z196, z114
- 2 ports per feature
- Longwave (LX) to 10km
- Shortwave (SX)
- 2, 4 or 8 GBps link rate

Reduced Ports per feature ...BUT... Better Performance

Let's Look At This Information In More Detail.....


Mainframe Channel Cards

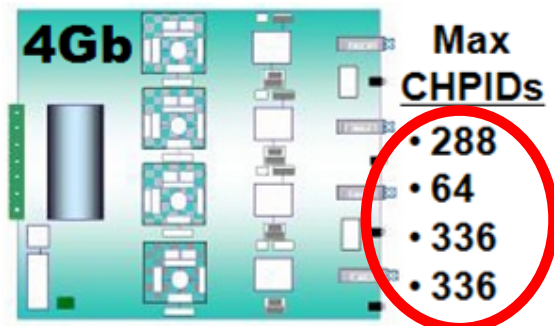

FICON Express4 – 4 ports
400MBps+400MBps = 800MBps

FICON Express4


- z196, z114, z10, z9
- 1, 2 or 4 GBps link rate
- **Cannot Perform at 4Gbps!**
- Standard FICON Mode:
44% ≤ 350MBps Full Duplex
out of 800 MBps
- zHPF FICON Mode:
65% ≤ 520MBps Full Duplex
out of 800 MBps
- 200 Buffer Credits per port
 - Out to 50km
assuming 1K frames

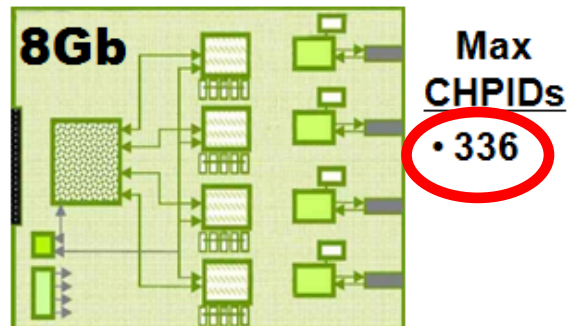

FICON Express8 – 4 ports
800MBps+800MBps = 1,600MBps

FICON Express8

- z10
- 2, 4 or 8 GBps link rate
- **Cannot Perform at 8Gbps!**
- Standard FICON Mode:
32% ≤ 510 MBps Full Duplex
out of 1600 MBps
- zHPF FICON Mode:
46% ≤ 740 MBps Full Duplex
out of 1600 MBps
- 40 Buffer Credits per port
 - Out to 5km
assuming 1K frames

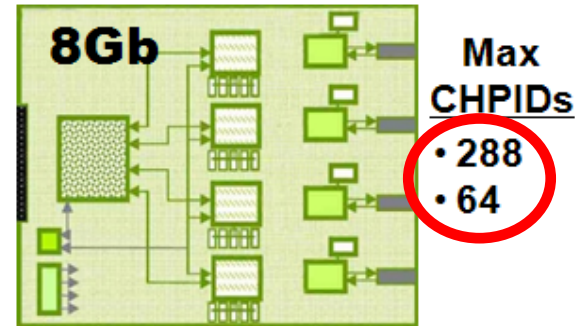


FICON Express8 – 4 ports
800MBps+800MBps = 1,600MBps

FICON Express8

- z196, z114
- 2, 4 or 8 GBps link rate
- **Cannot Perform at 8Gbps!**
- Standard FICON Mode:
32% ≤ 510 MBps Full Duplex
out of 1600 MBps
- zHPF FICON Mode:
46% ≤ 740 MBps Full Duplex
out of 1600 MBps
- 40 Buffer Credits per port
 - Out to 5km
assuming 1K frames

Mainframe Channel Cards

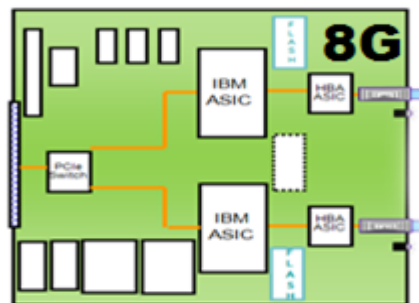

FICON Express8S – 2 ports
800MBps+800MBps=1600MBps

FICON Express8S

- z196, z114
- 2, 4 or 8 Gbps link rate
- **zHPF Performs at 8Gbps!**
- Standard FICON Mode:
39% ≤ 620MBps Full Duplex
out of 1600 MBps
- zHPF FICON Mode:
100% ≤ 1600 MBps Full Duplex
out of 1600 MBps
- **40 Buffer Credits per port**
 - Out to 5km
assuming 1K frames

Max
CHPIDs


- 320
- 128

• FICON Express8S (I call it Speedy):

- New IBM Channel ASIC which supports...
- PCIe 8 Gbps host bus in a new...
- PCIe I/O drawer
- Increased start I/Os over FICON Express8
- Improved throughput for zHPF and FCP
- Increased port granularity – 2 CHPIDs/FX8S
- Introduction of a Hardware Data Router
- The Hardware Data Router supports the zHPF and FCP protocols providing path length reduction and increased throughput
- 2 CHPIDs/FX8S versus the 4 CHPIDs/FX8 helps facilitate purchasing the right number of ports to help satisfy your application requirements and to better optimize your infrastructure for redundancy



FICON/FCP Switching Devices

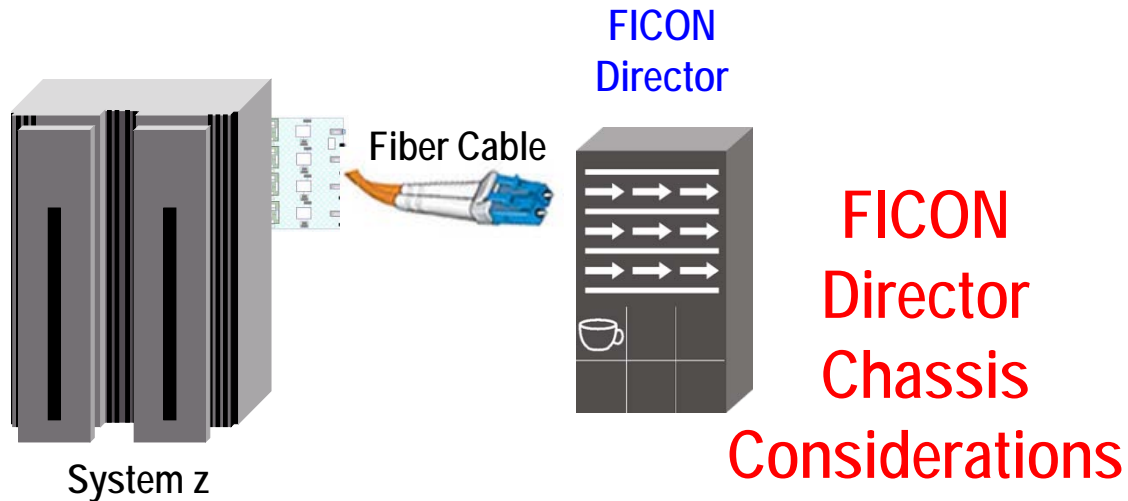

- Switched-FICON
- Direct-attached (point-to-point) versus switched FICON connectivity
- Redundant fabrics to position for five-9s of availability
- Multimode cables and short wave SFP limitations

Switched-FICON is a Best Practice for System z

- Architected and deployed correctly, Brocade FICON switching devices do not cause performance problems in a local data center nor across very long distances
 - Cut-through frame routing and very low frame latency times
- In fact, use of Brocade switched-FICON and Brocade FCIP long distance connectivity solutions usually enhances DASD replication performance and long distance tape operations effectiveness and performance
 - XRC emulation, Tape Read/Write Pipelining, Teradata Pipelining
- Switched-FICON is the only way to efficiently and effectively support Linux on System z connectivity
 - Makes use of Node_Port ID Virtualization (NPIV) channel virtualization
- Switched-FICON is the only way to really take advantage of the full value of the System z I/O subsystem
 - Let's see why....




Current z/OS and System z Functionality

Some of the z/OS and/or System z functionality will REQUIRE that a customer deploy switched-FICON:

- **FICON Express8 CHPID buffer credits:** Only 40 BCs per FICON 8Gbps CHPID limits long distance direct connectivity to $\leq 10\text{km}$. Use up to 1,300 port buffer credits on FICON switching devices for longer distances.
- **FICON Dynamic Channel Management:** Ability to dynamically add and remove channel resources at Workload Manager discretion can be accomplished only in switched-FICON environments.
- **zDAC:** Simplified configuration of FICON connected DASD and tape through z/OS FICON Discovery and Auto Configuration (zDAC) capability of switched-FICON fabrics.
- **NPIV:** Excellent for Linux on the Mainframe, Node_Port ID Virtualization allows many FCP I/O users to interleave I/O across a single physical but virtualized channel path which helps to minimize the total number of channel paths that the customer must deploy

End-to-End FICON Connectivity

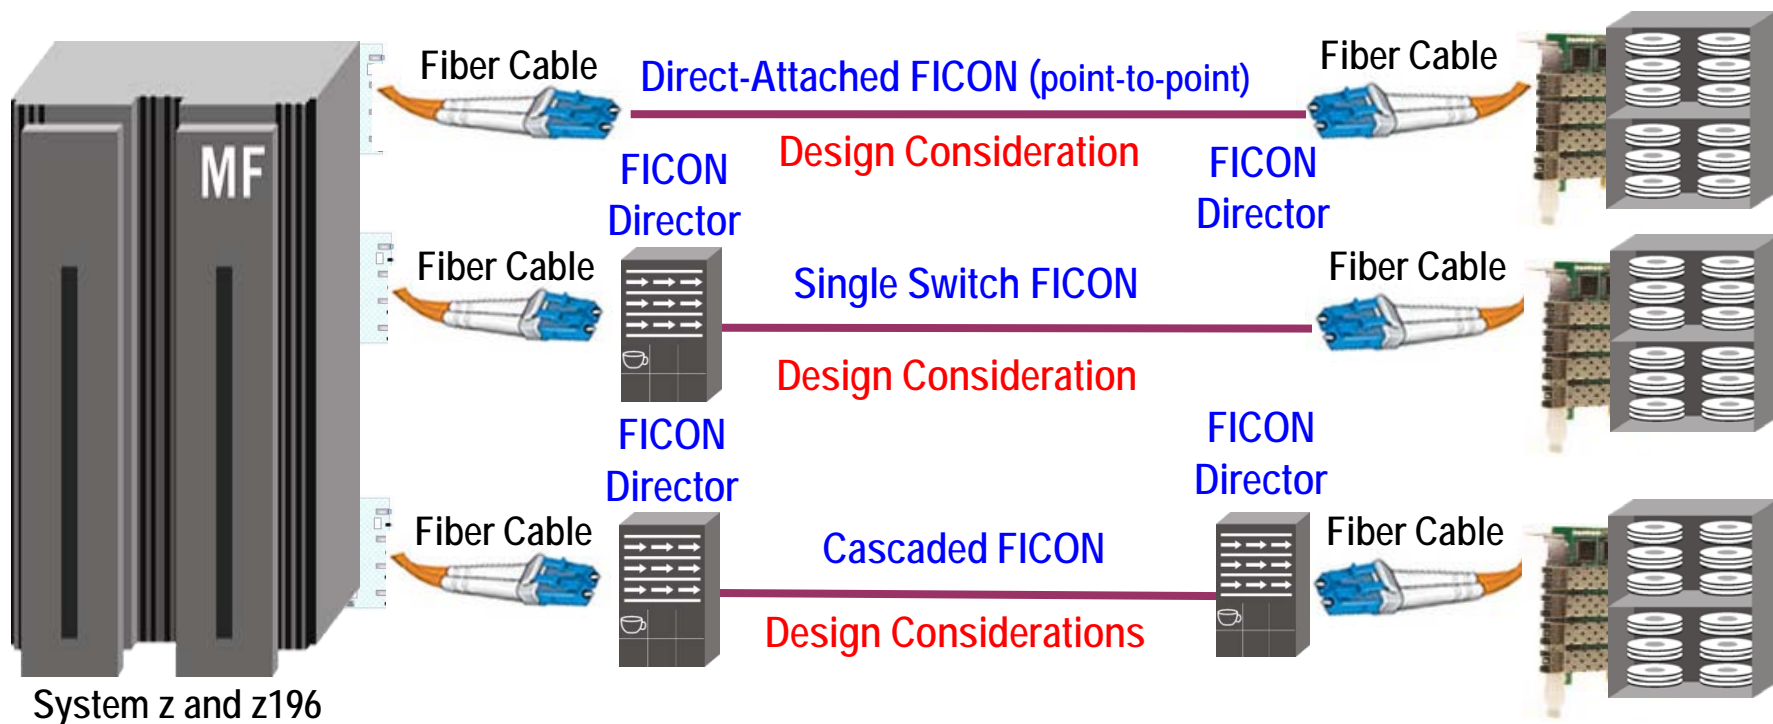

• These are the typical ways that FICON is deployed for an enterprise.

- Switch device Long wave ports (Single Mode cables) can go to 10km or 25km (ELWL) possibly even farther
- Switch device Short wave ports (Multimode cables) can go from 50-500 meters

Direct-attached FICON -- Just Do Not Do It!



- Cannot take advantage of changes to z/OS and System z Functionality such as:
 - Node-Port ID Virtualization (NPIV) which enhances Linux on System z performance
 - Dynamic Channel Management (DCM)
 - FICON Device Discovery and Auto Configuration (zDAC)
- Cannot achieve the same availability as is possible with switched-FICON
- Cannot get RMF reports about FICON path buffer credit usage
- Cannot take advantage of FICON switches as distance extenders
- Cannot consolidate and reduce CHPIDs and Storage Ports and thereby also reduce power and cooling and possibly floor space
- Scalability becomes limited to the total mainframe CHPID pool
- Cannot fully utilize all I/O resources
- Cannot make use of storage Fan In – Fan Out







Native FICON with Simple Cascading (FC)




- Uses FICON switching devices
- Single fabrics provide no more than four-9s of availability – if a switching devices fails (a very rare occurrence) it could take down all connectivity ¹
- Redundant fabrics might provide five-9s of availability – a fabric failure would not take down all connectivity – but, loss of bandwidth is another consideration to create five-9s environments

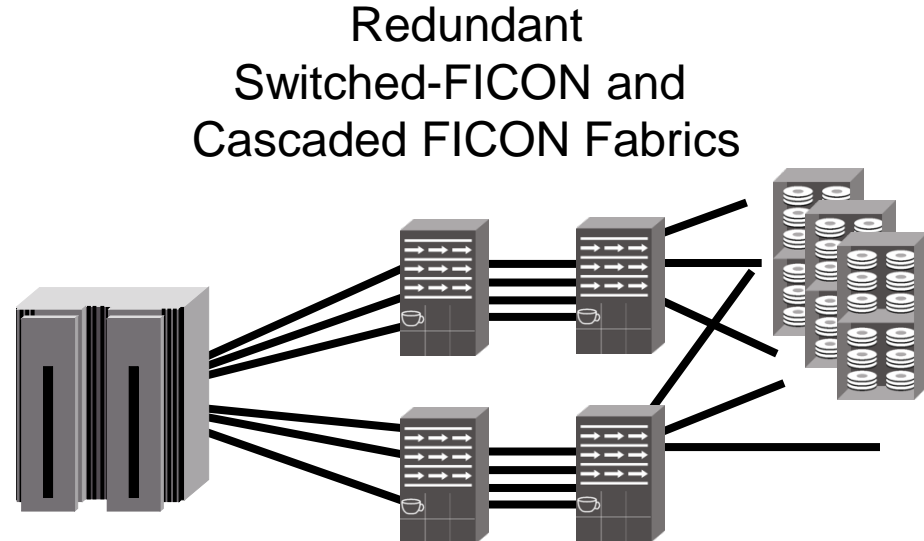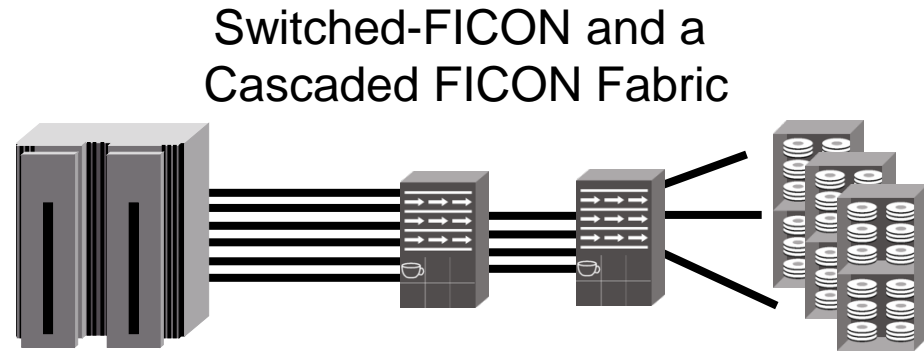


Native FICON with Cascading

- Scalable FICON benefits.
- Cascaded FICON allows:
 - Scalability of resources
 - Ease of growth and change
 - Multiple protocols
 - Support for dynamic connectivity to a local or remote environment
- Notice that there can be several switches/Directors attached to a core Director but there can only be 1 hop (switch to switch) between a CHPID and a storage port

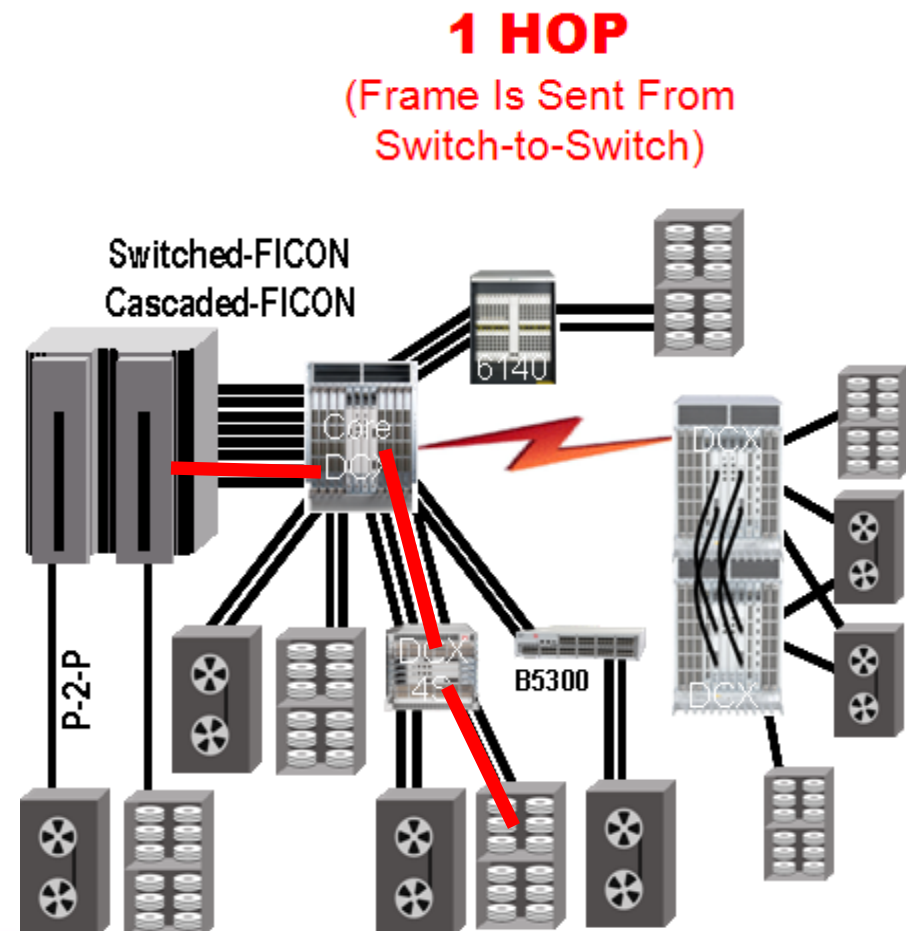

Multi-mode cable distance limitations

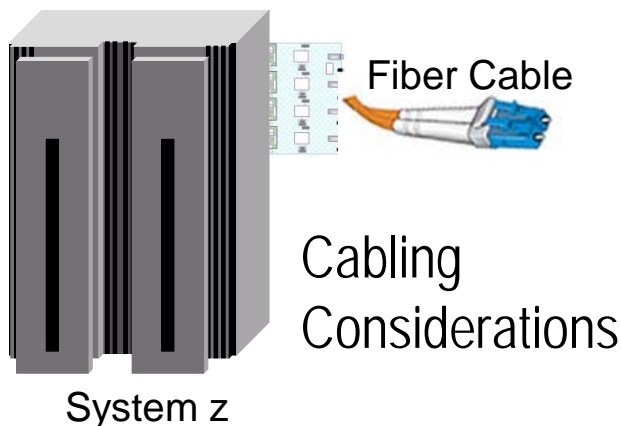

Short wave multi-mode can be limiting!

- Must clean cable ends at 8G and beyond – very sensitive!
- OM2 cables might not be adequate at 8G and above

More Care Must Be Taken During SFP Deployment


- 4G optics will auto-negotiate back to 1G and 2G
- 8G optics will auto-negotiate back to 2G and 4G
 - 1G storage connectivity requires 4G SFPs
- 16G optics will auto-negotiate back to 4G and 8
 - 2G storage connectivity will require 8G SFPs

Distance with Multi-Mode Cables (feet/meters)

	Protocol (FC)	Encoding	Line Rate (Gb/sec)	OM1-62.5m (200mHz) Multi-Mode	OM2-50m (500mHz) Multi-Mode	OM3-50m (2000mHz) Multi-Mode	OM4-50m (4700mHz) Multi-Mode
SFP	1G	8b10b	1.0625	984/300	1640/500	2822/860	~
SFP+	2G	8b10b	2.125	492/150	984/300	1640/500	~
SFP+	4G	8b10b	4.25	230/70	492/150	1247/380	1312/400
SFP+	8G	8b10b	8.5	69/21	164/50	492/150	623/190
SFP+	10G	64b66b	10.53	108/33	269/82	~984/300	~984/300
SFP+	16G	64b66b	14.025	49/15	115/35	328/100	410/125
ICLs	QSFP (4x16)	64b66b	14.025	N/A	164/50	164/50	164/50



End-to-End FICON/FCP Connectivity

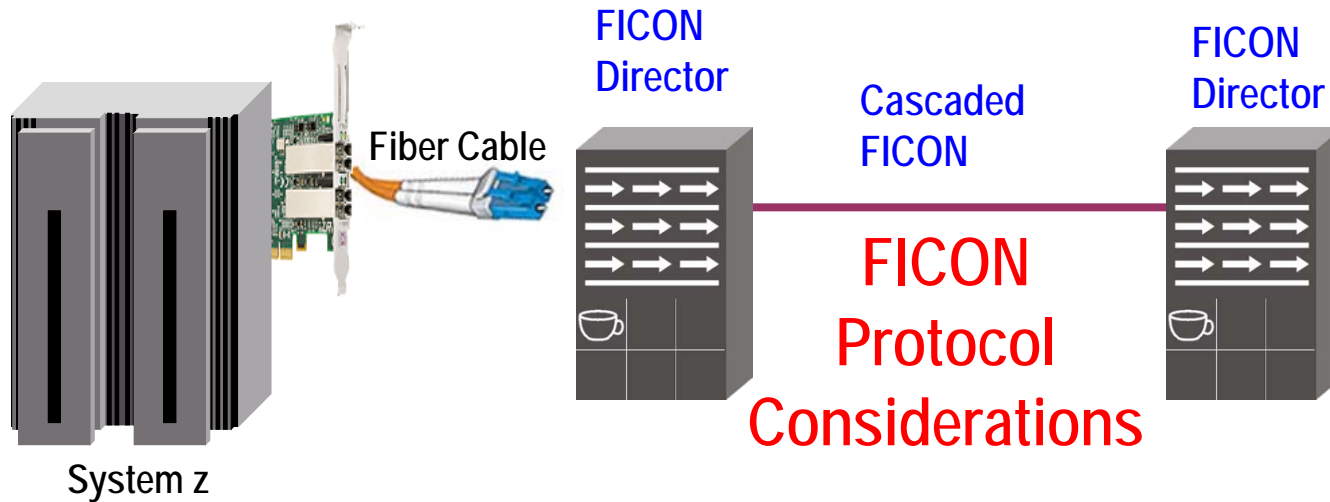

- With 8b10b, ~ 20% overhead per full frame on FICON links
- With 64b66b, ~ 2% overhead per full frame on FICON links


Customers can use 2/4/8/16G and/or 10G for ISL traffic today

The FICON Protocol uses 8b10b data encoding for most link rates – but there is 20% frame payload overhead associated with it

Newer 64b66b data encoding (10G and 16G) is also in use and is more performance oriented (only 2% data payload overhead)

MIDAW & zHPF make very good use of 8G FICON switch links


FICON FC-SB-2/3 – Channel Efficiency

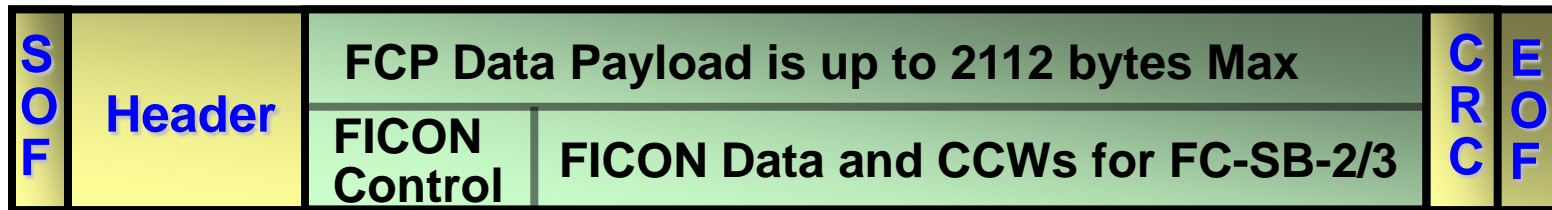

64 bytes <===FICON: 2048 bytes Max =====>

<=== 2112 bytes without FICON Control ===>

<==Except for 1st frame, 2148 bytes Max out of 2148 possible==>

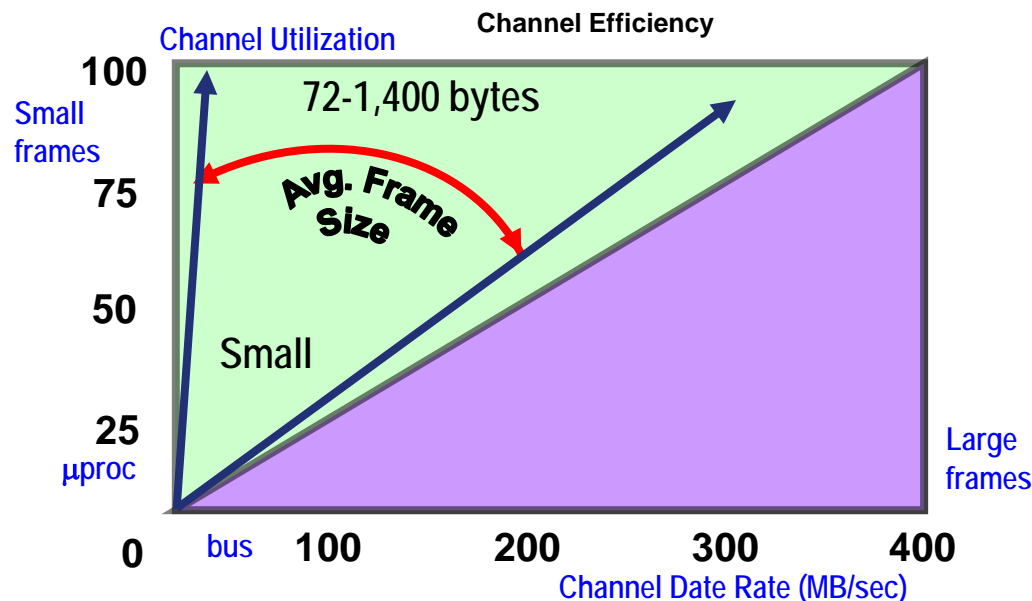

FC-SB-2/3

FC-SB-2/3 FICON tends to have an average frame size of between 72 and 1400 bytes

FC-SB-2/3 is used for all FICON Tape data sets and normally used for BSAM, QSAM and EXCP datasets



High Performance FICON (zHPF)




- Available since October 2008
 - zHPF is qualified on, but is not technically part of, switching
 - Partly z/OS IOS code and partly DASD control unit code
 - Available on specific IBM, HDS and EMC DASD units
- zHPF is a performance, reliability, availability and serviceability (RAS) enhancement of the z/Architecture and the FICON channel architecture
- It is implemented exclusively in System z10, z196 and z114
- Exploitation of zHPF by the FICON channel, the z/OS operating system, and the DASD control unit is designed to help reduce the FICON channel overhead
 - This is achieved through protocol simplification, CCW encapsulation within a frame, and sending fewer frames in an I/O exchange resulting in more efficient use of the channel

FICON FC-SB-4 zHPF – More Data, Fewer Frames




FICON Transport-Command IU for FC-SB-4

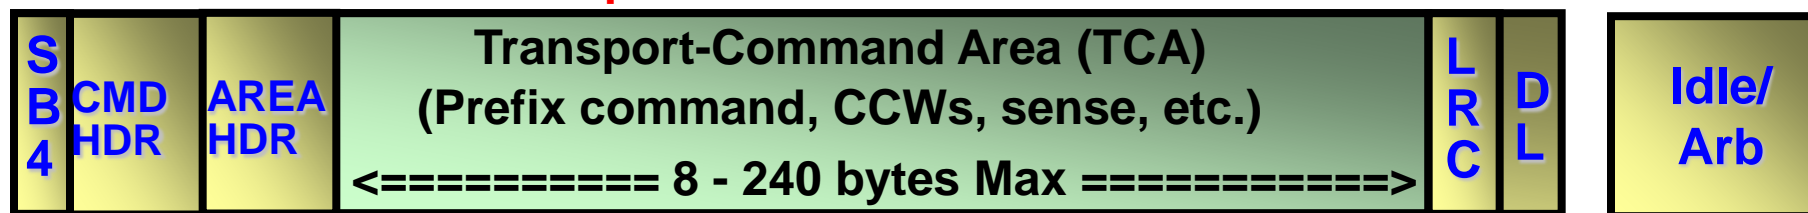


<===== 44 - 276 bytes Max =====>

FICON Transport-Data IU for FC-SB-4 – larger average frame sizes

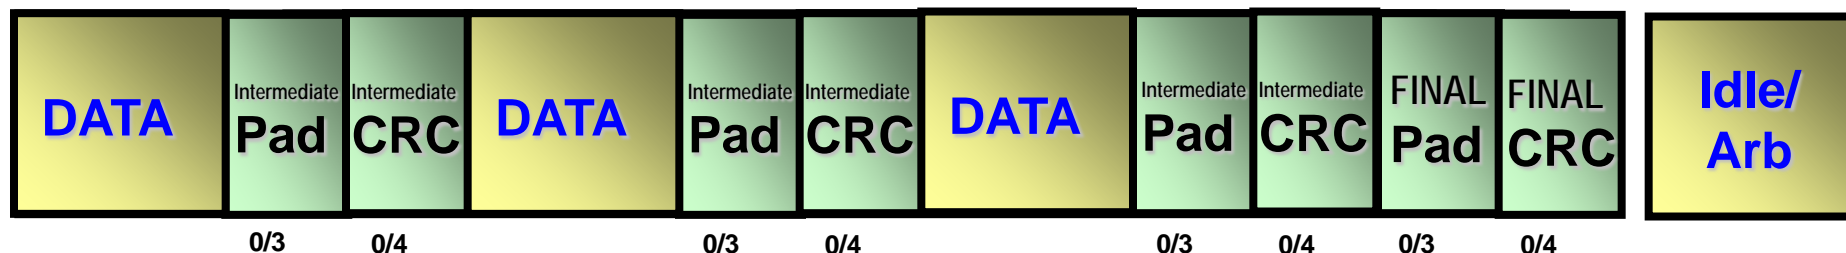

<===== 0 - 4GB (-16 bytes) Max =====>

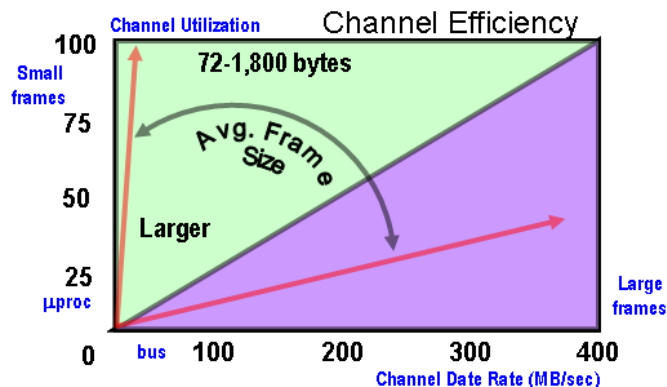

FC-SB-4


FC-SB-4 FICON tends to have an average frame size of between 72 and 1,800 bytes

FC-SB-4 can be used for FICON Media Manager Datasets like VSAM, DB2, PDSE (basically Extended Format DS) as well as BSAM, QSAM and BPAM DASD datasets





End-to-End FICON/FCP Connectivity

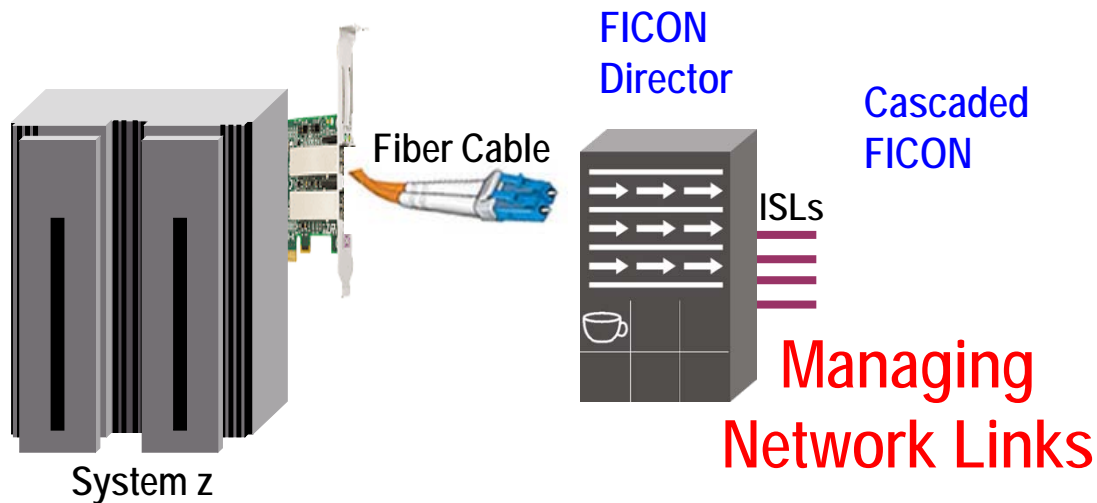

Many Possible Topics


- Fabric Link rates
- FICON Fabric Scalability
- Hops and hop issues
- Managing ISL Congestion
- Trunking
- Protocol Intermixed FICON Fabrics
- Buffer Credits
- Control Unit Port (CUP)
- Distance Extension

Here we are at cascaded links (ISLs)

There are too many design considerations with switch-to-switch and data center-to-data center connectivity to do it all today


I will just spend a moment to discuss fabric link rates.

There is no such thing as End-to-End Link Rate

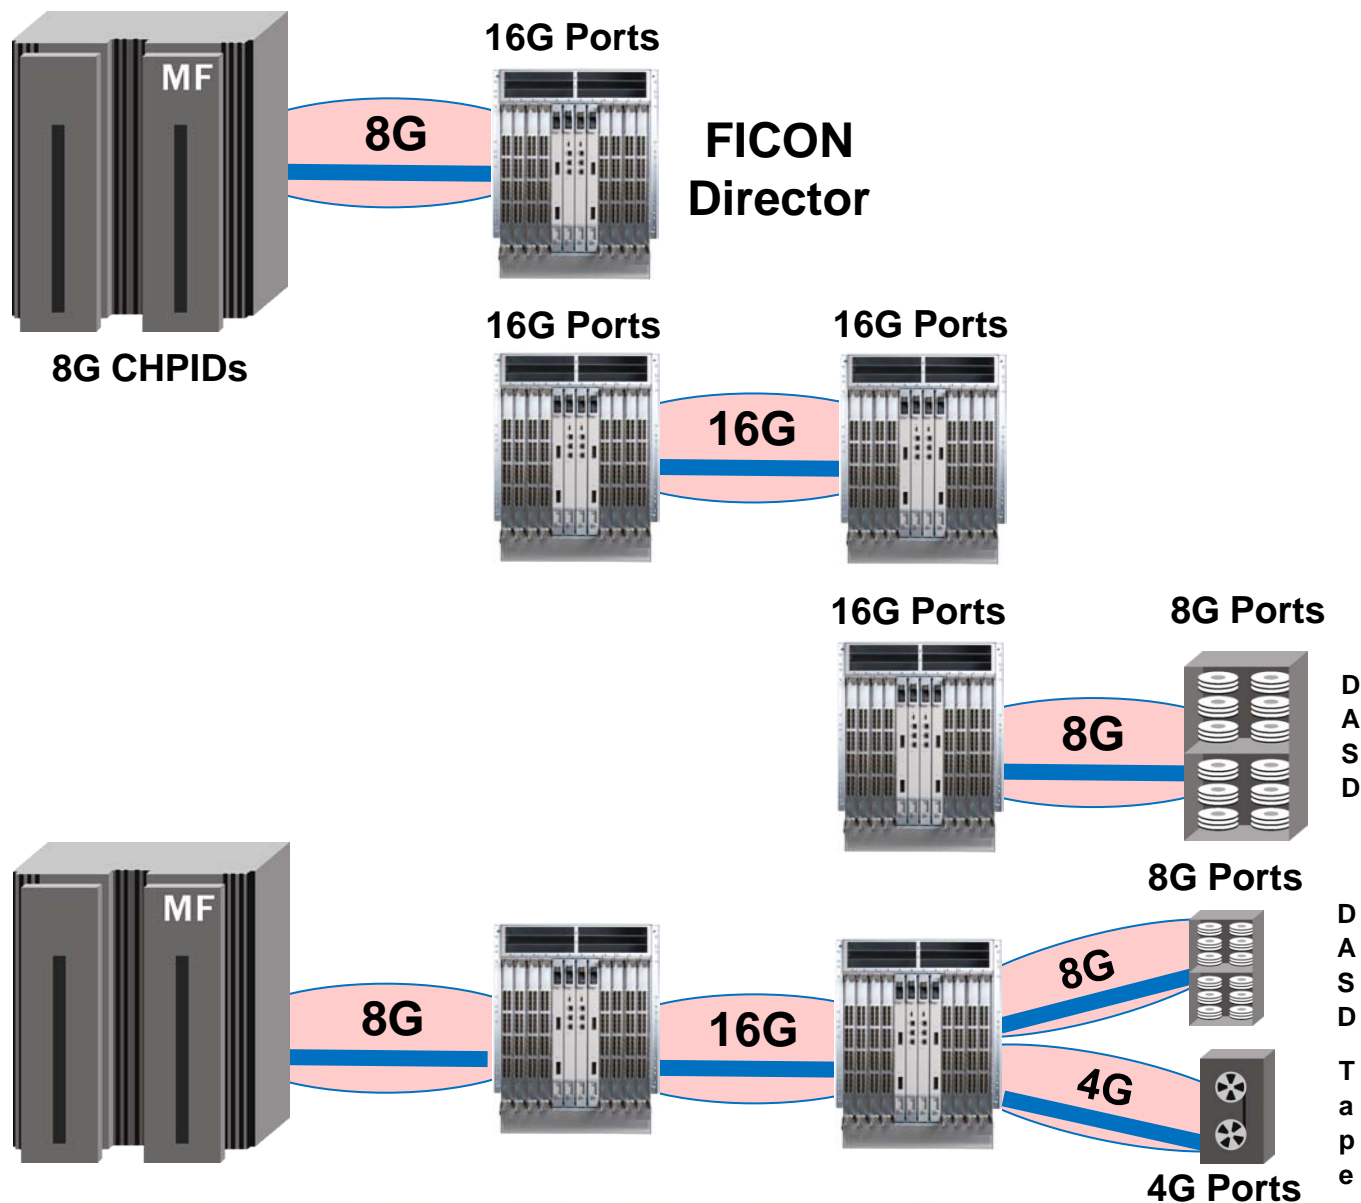

- Some I/O traffic will flow faster through the fabric than other I/O traffic will be capable of doing


A Discussion On The Affects Of Link Rates

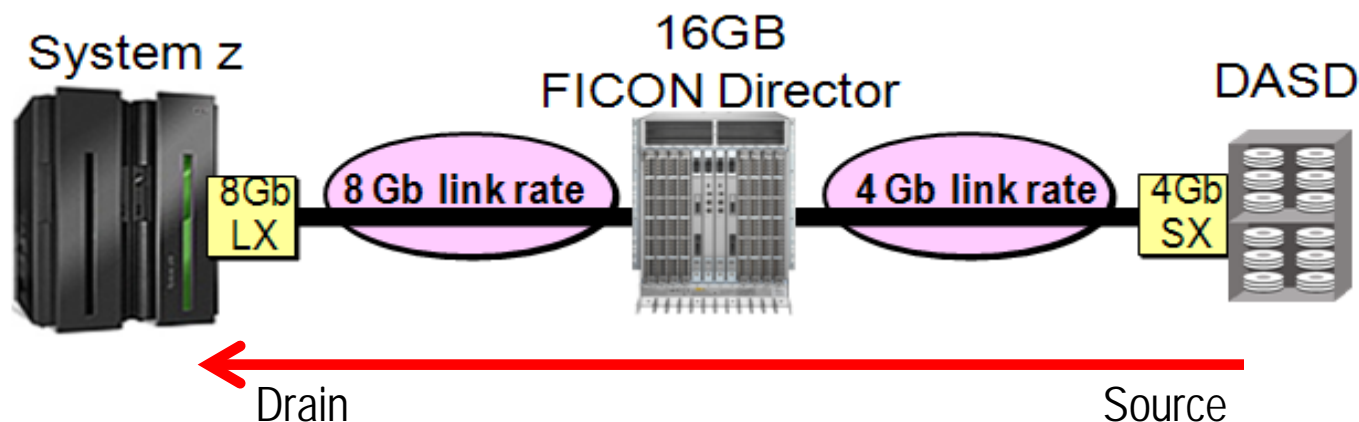

- Assuming no buffer credit problems, and assuming the normal and typical use of DASD, is the above a good configuration?
- If you deployed this configuration, is there a probability of performance problems and/or slow draining devices or not?
- This is actually the ideal model!
- Most DASD applications are 90% read, 10% write. So, in this case the "drain" of the pipe are the 8Gb CHPIDs and the "source" of the pipe are 4Gb storage ports.
- The 4G source (DASD in this case) cannot overrun the drain (8G CHPID)

The Affects Of Link Rates


(Adding 8G DASD with only 4G CHPIDs)

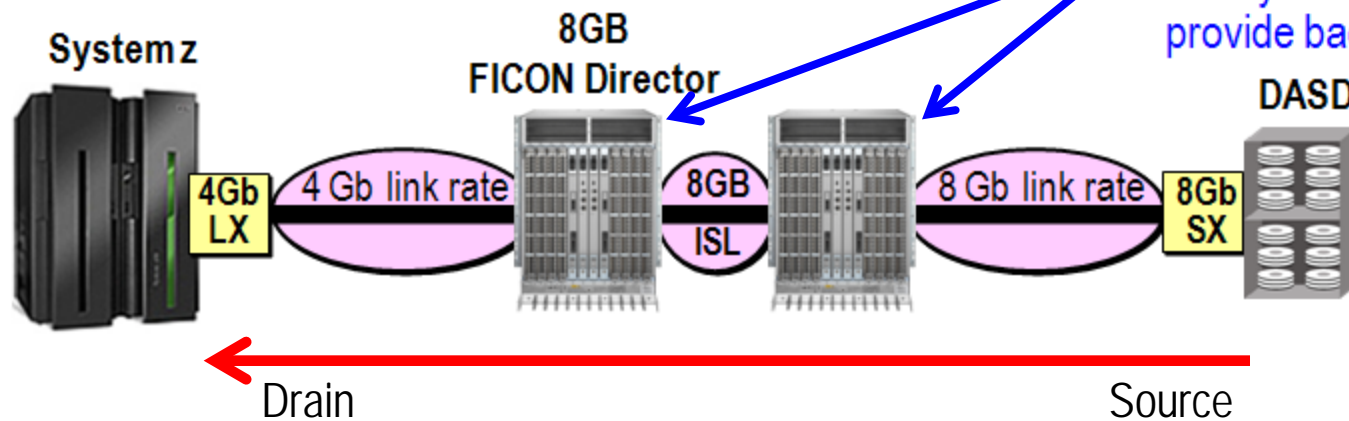

Buffer credits can get used up trying to hold the DASD data while they are waiting on the CHPID to provide back the acknowledgements.


- Assuming no ISL or BC problems, and assuming the normal and typical use of DASD, is the above a good configuration?
- If you deployed this configuration, is there a probability of performance problems and/or slow draining devices or not?
- This is potentially a very poor performing, infrastructure!
- Again, DASD is about 90% read, 10% write. So, in this case the "drain" of the pipe are the 4Gb CHPIDs and the "source" of the pipe are 8Gb storage ports.
- The Source can out perform the Drain. This can cause congestion and back pressure towards the CHPID. The CHPID becomes a slow draining device.

End-to-End FICON/FCP Connectivity

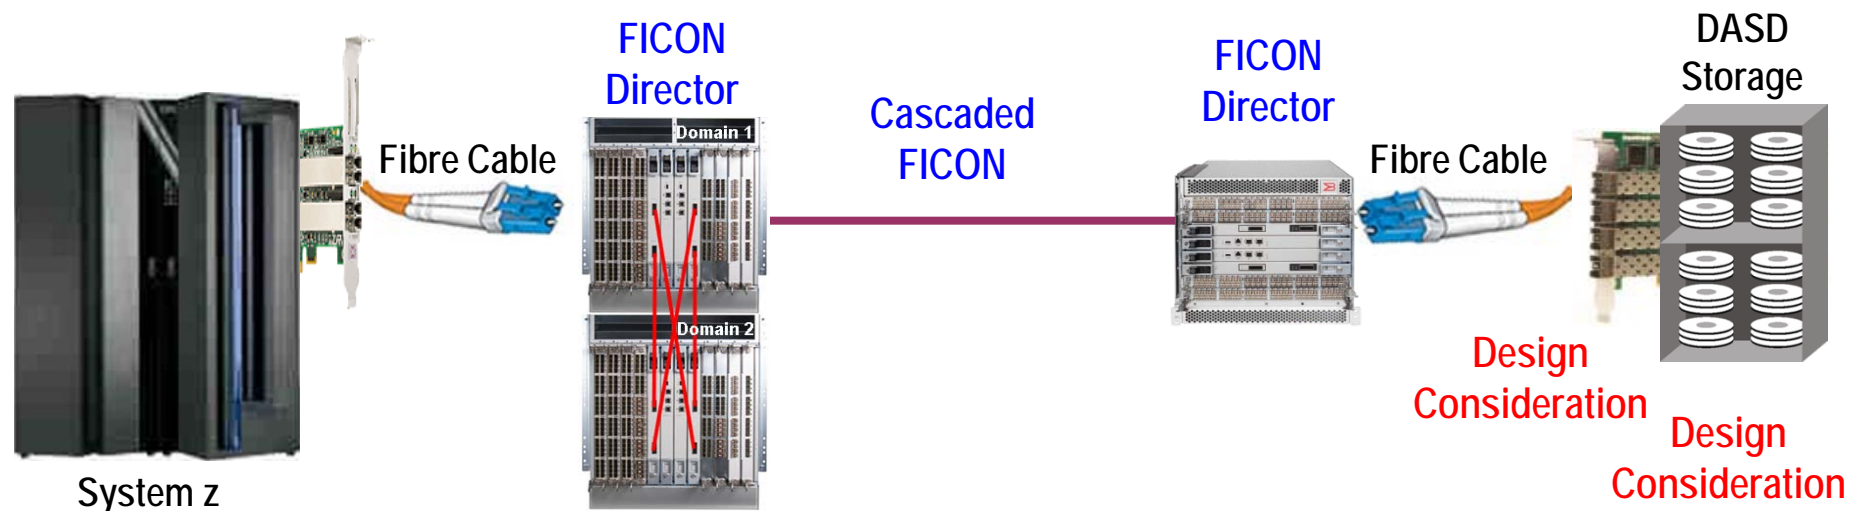

- Your most challenging considerations most likely occur due to DASD storage deployment

Connectivity with storage devices

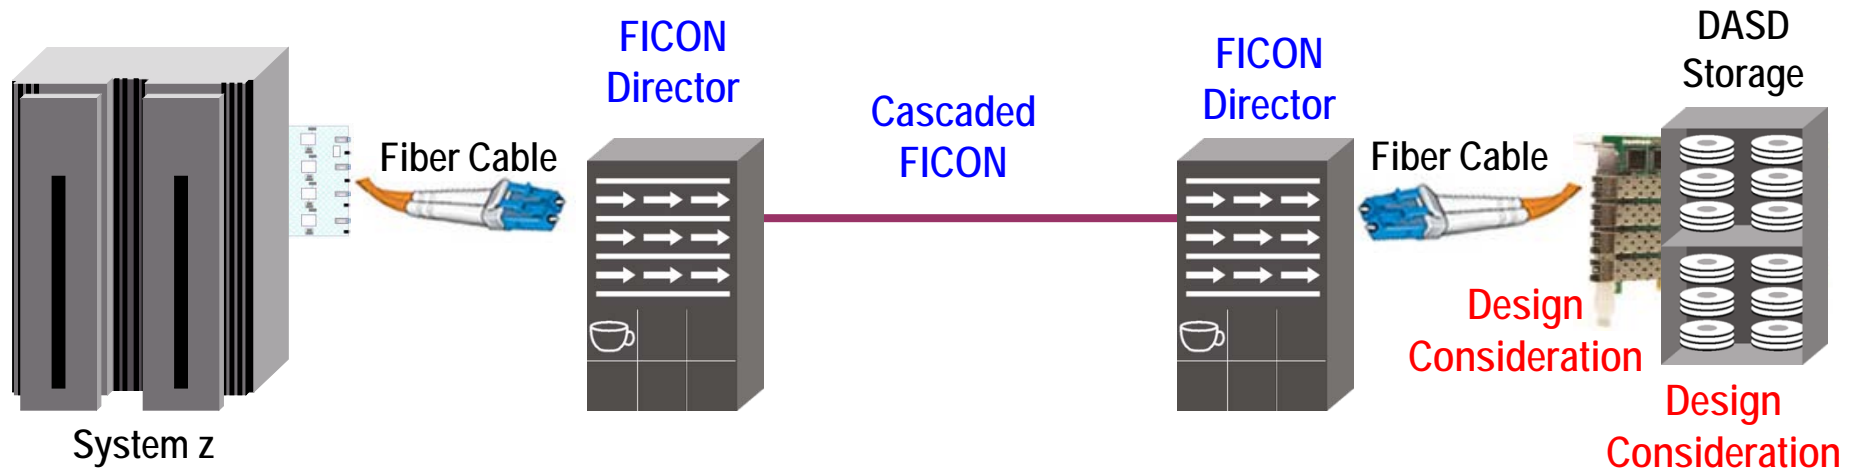

Storage adapters can be throughput constrained


- Must ask storage vendor about performance specifics
- Is zHPF supported/enabled on your DASD control units?

Busy storage arrays can equal reduced performance

- RAID used, RPMs, volume size, etc.
- Let's look a little closer at this

Connectivity with storage devices

Storage and
HDD's



How fast are the Storage Adapters?

- Mostly 2 / 4Gbps today – but moving to 8G – where are the internal bottlenecks?


What kinds of internal bottlenecks does a DASD array have?

- 7200rpm, 10,000rpm, 15,000rpm
- What kind of volumes: 3390-3; 3390-54; EAV; XIV
- How many volumes are on a device? HiperPAV in use?
- How many HDDs in a Rank (arms to do the work)
- What Raid scheme is being used (RAID penalties)?
- Etc.

Intellimagic or Performance Associates, for example, can provide you with great tools to assist you to understand DASD performance much better

These tools perform mathematical calculations against raw RMF data to determine storage HDD utilization characteristics – use them or something like them to understand I/O metrics!

End-to-End FICON/FCP Connectivity

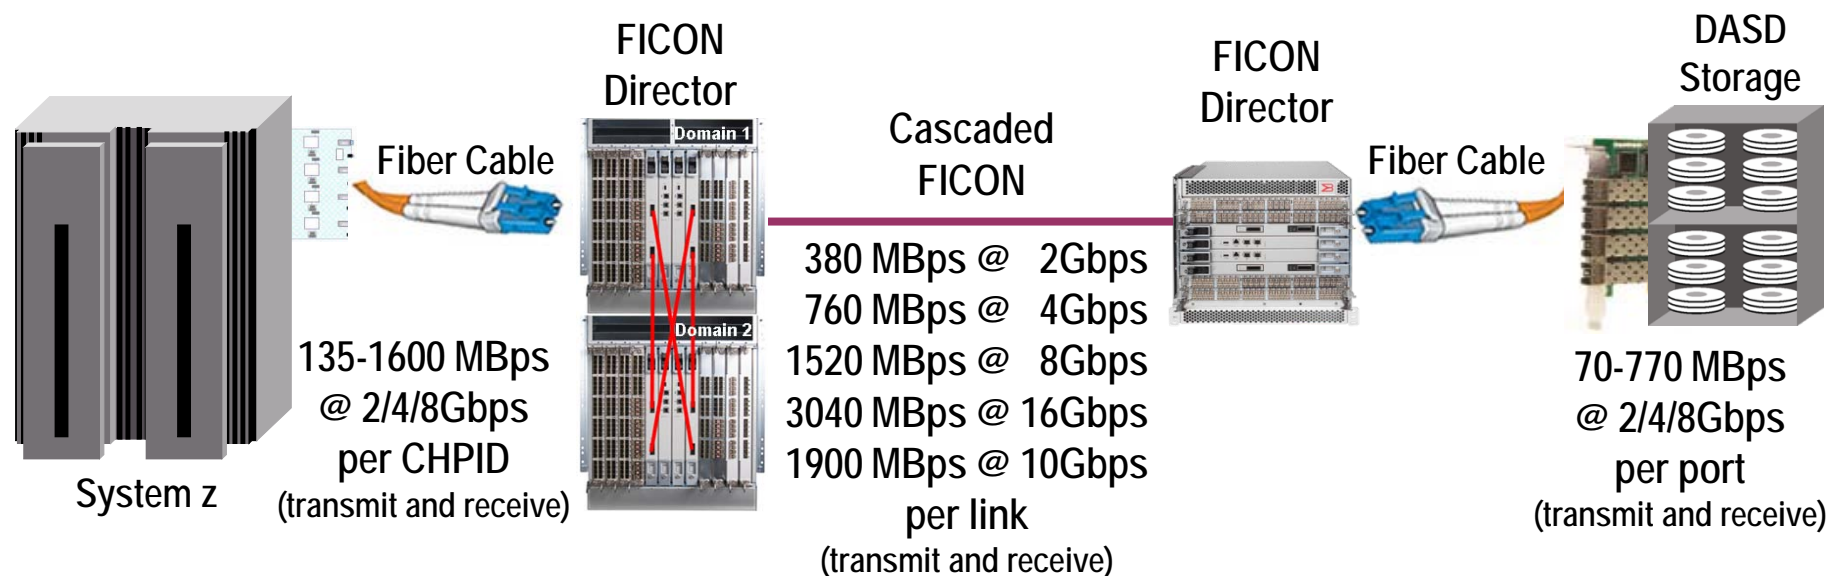


- In order to fully utilize the capabilities of a FICON fabric a customer needs to deploy a Fan In – Fan Out Architecture
- If you are going to deploy Linux on System z, or private cloud computing, then switched FICON flexibility is required!

FICON should just never be direct attached!



FI-FO Overcomes System Bottlenecks

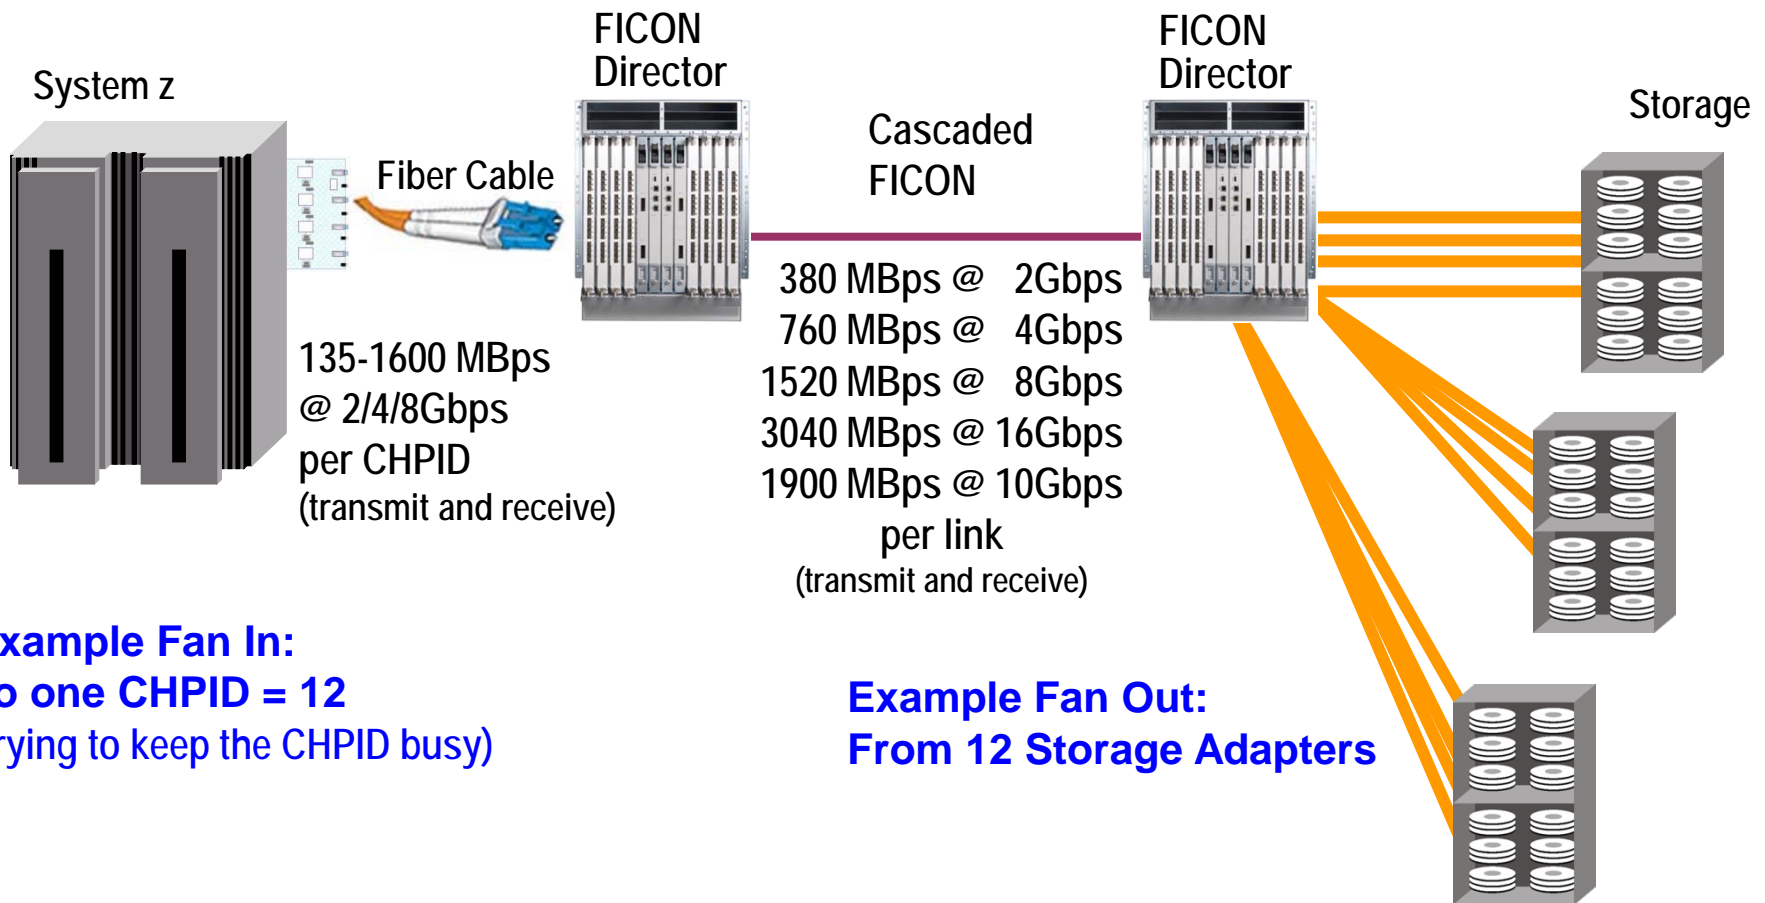


Example Fan In:
To one CHPID = 12
(trying to keep the CHPID busy)

Example Fan Out:
From 12 Storage Adapters

- Total FICON path usually does not support full speed
 - Must deploy Fan In – Fan Out to utilize connections wisely
 - Multiple I/O flows funneled over a single channel path



BROCADE

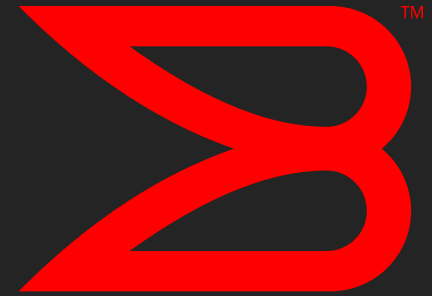

Brocade's Mainframe Certification

Industry Recognized Professional Certification

We Can Schedule A Class In Your City – Just Ask!



» *Brocade FICON Certification*

**Brocade
Certified Architect
for FICON**



Certification for Brocade Mainframe-centric Customers – Available since Sept 2008
For people who do or will work in FICON environments

Brocade provides a free on-site or in area 2-day class (Brocade Design and Implementation for FICON Environments – FCAF200), to assist customers in obtaining the knowledge to pass this certification examination – ask your local sales team about this training – also look at www.brocade.com under Education

Certification tests a person's ability to understand IBM System z I/O concepts, and demonstrate knowledge of Brocade FICON Director and switching fabric components

After the class a participant should be able to design, install, configure, maintain, manage, and troubleshoot Brocade hardware and software products for local and metro distance (100 km) environments


Check the following website for complete information:

- <http://www.brocade.com/education/certification-accreditation/certified-architect-ficon/index.page>

.....My Next Presentation.....

A deeper look into the Inner Workings and Hidden Mechanisms of FICON Performance

- **David Lytle, BCAAF**
- **Brocade Communications Inc.**
- **Tuesday March 13, 2011 -- 3pm to 4pm**
- **Session Number - 11004**

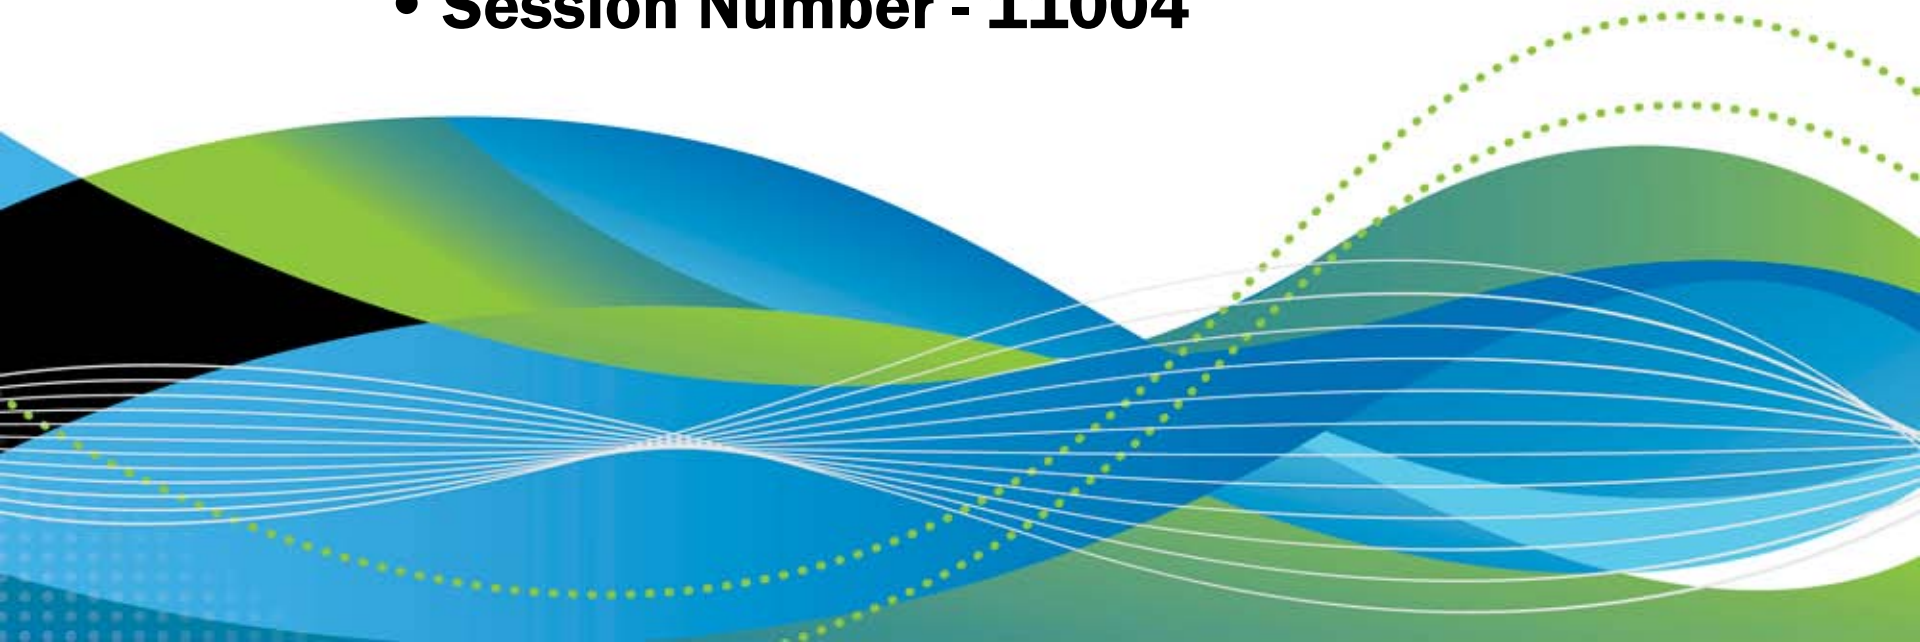

SAN Sessions at SHARE this week



Tuesday:

Time-Session


1500 - 11004: A deeper look into the Inner Workings and Hidden Mechanisms of FICON Performance

Visit Brocade's Mainframe Blog Page at:

<http://community.brocade.com/community/brocadeblogs/mainframe>

Also Visit Brocade's New Mainframe Communities Page at:

http://community.brocade.com/community/forums/products_and_solutions/mainframe_solutions



Please Fill Out Your Evaluation Forms!!

This was session: 11003

**And Please Indicate On Those Forms If There
Are Other Presentations That You Would Like
To See In This SAN Track At SHARE.**

Thank You.

