


# Managing z/VM & Linux Performance Best Practices

Mike Sine  
IBM, Advanced Technical Skills, Americas

March 15, 2012  
Session: 10321

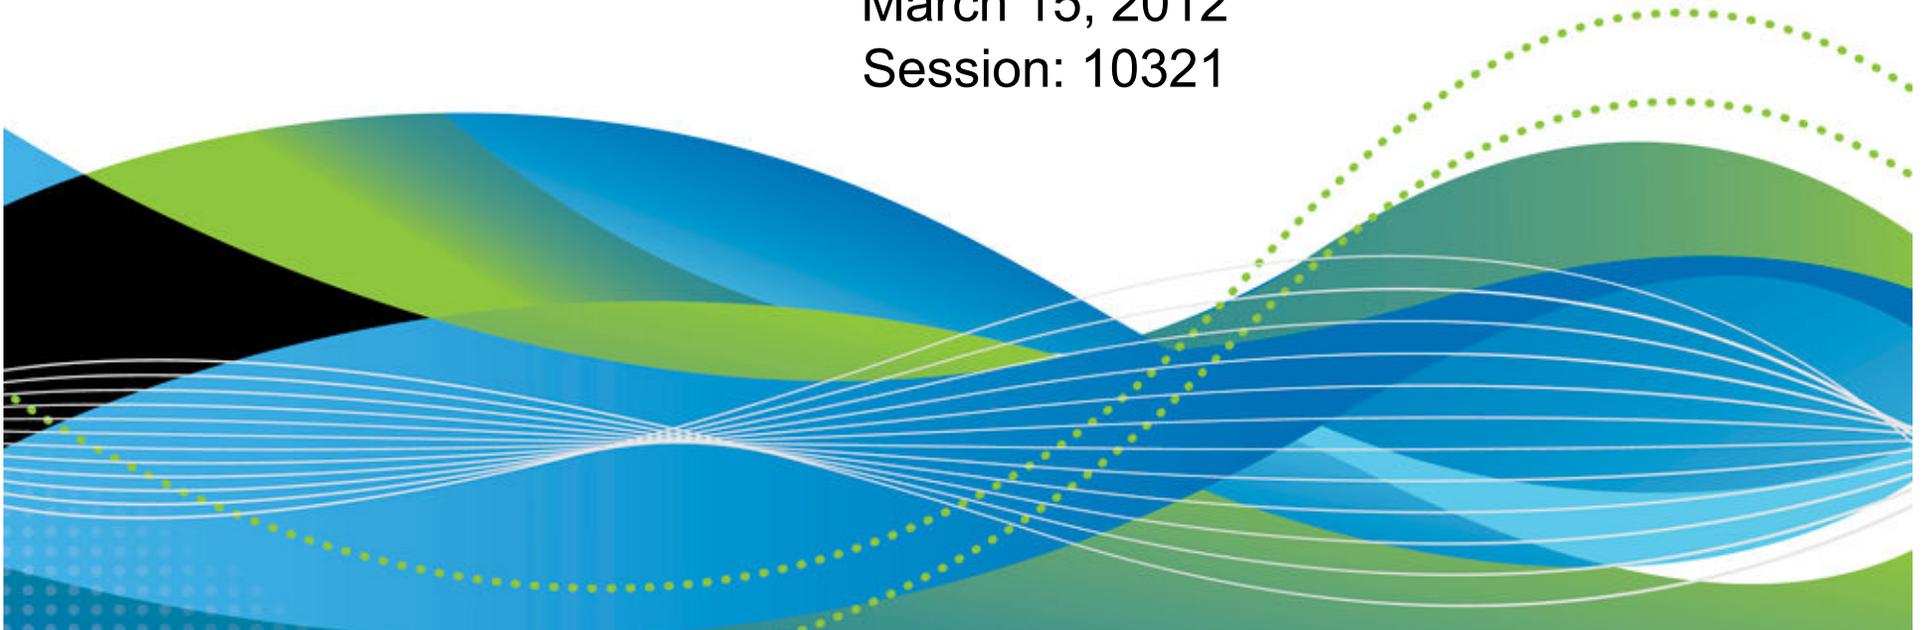

# AGENDA

- [Introduction](#)
- Monitoring Requirements
  - Virtual Linux and z/VM performance considerations
  - Don't forget the hardware
  - Integration from hardware – systems – applications Persistent historical views
- Enterprise Management
- Operational Requirements
  - Centralized Control
  - Including all Enterprise Virtual Machines
- Integrating Monitoring and Operations
- Bringing it all together

## Virtual Linux servers have unique challenges versus running on physical machines.


- **z/VM System Programmers and Linux Administrators may not be in the same organization.**
- **We find that it is easy to over allocate resources; therefore, our monitoring examines resource usage of hardware, hypervisor, as well as the virtual machine. Real-time and historical metrics demonstrate peaks periods as well as average runtimes.**
- **Cross-platform virtualization increases these challenges**



# AGENDA

- Introduction
- **Monitoring Requirements**
  - Virtual Linux and z/VM performance considerations
  - Don't forget the hardware
  - Integration from hardware – systems – applications Persistent historical views
- Enterprise Management
- Operational Requirements
  - Centralized Control
  - Including all Enterprise Virtual Machines
- Integrating Monitoring and Operations
- Bringing it all together

# OMEGAMON XE on z/VM and Linux agents with ITM example

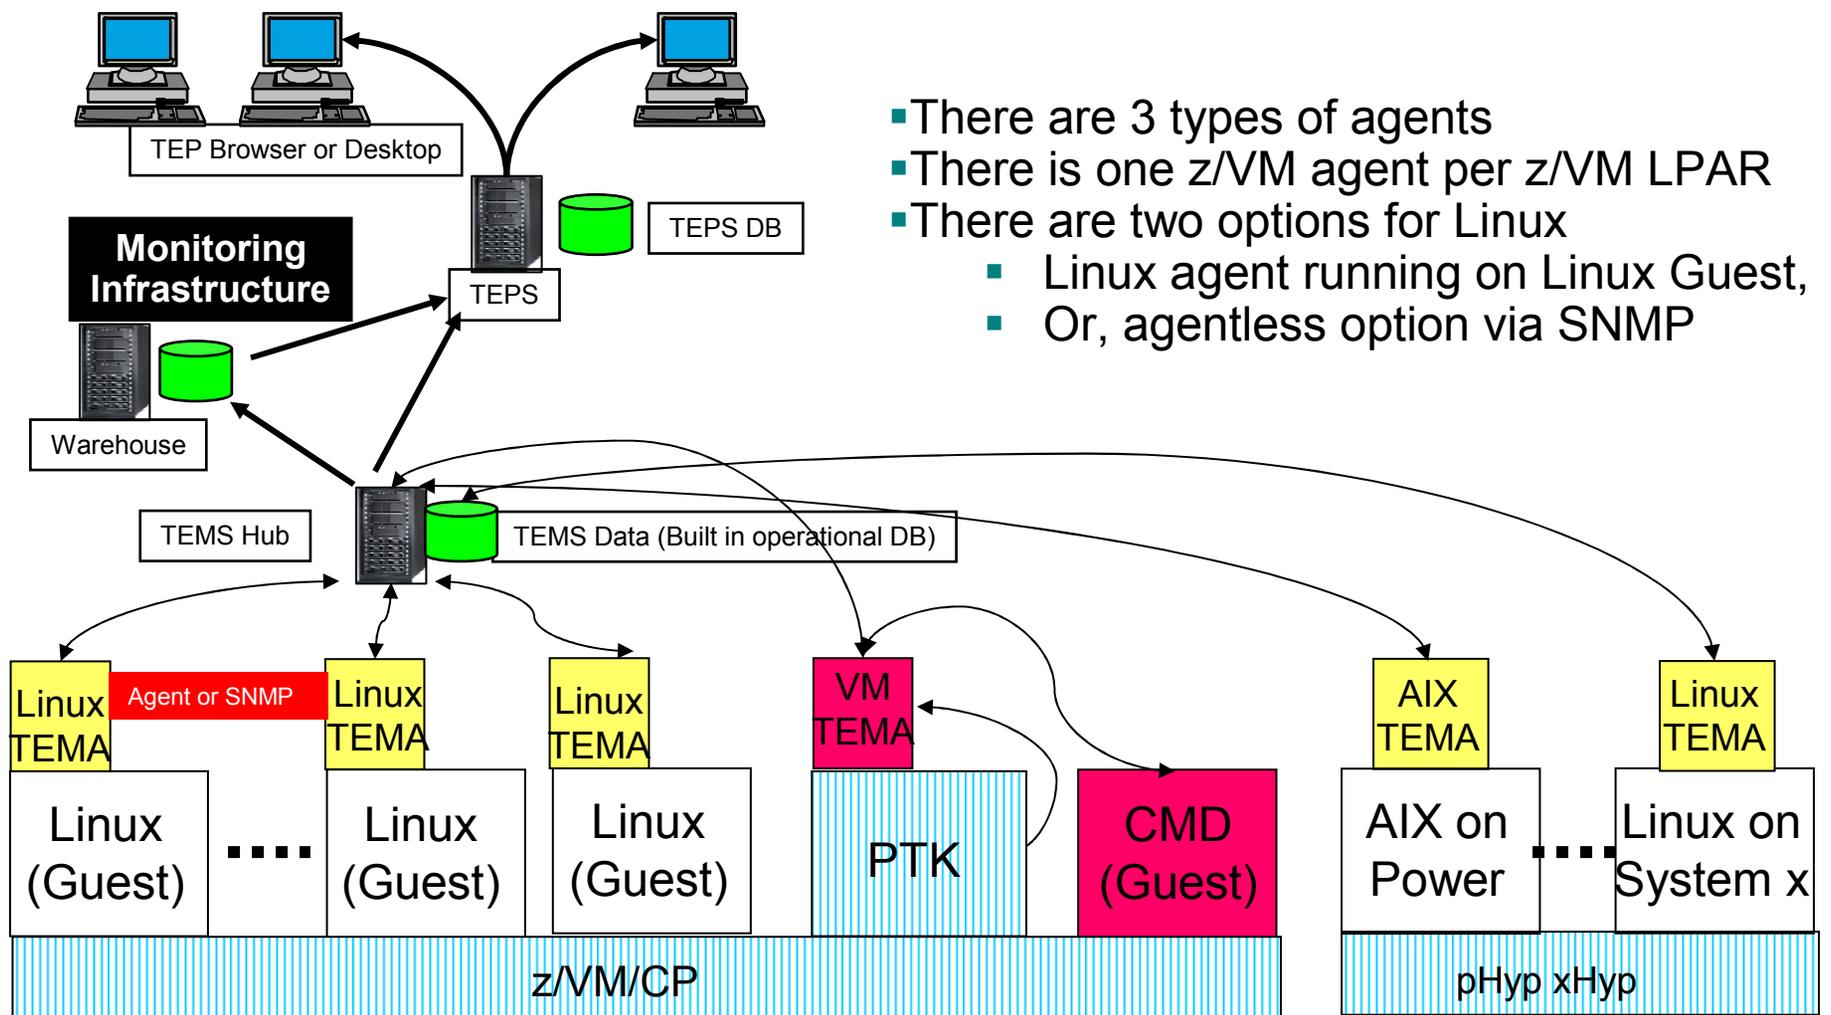

- There are 3 types of agents
- There is one z/VM agent per z/VM LPAR
- There are two options for Linux
  - Linux agent running on Linux Guest,
  - Or, agentless option via SNMP

## An Integrated Monitoring Approach

- Provides performance monitoring for z/VM and Linux guests
- Executes automated actions in response to defined events or situations
- Integrates well across Enterprise for central control and trending:
  - Specifically focused on z/VM and Linux guests
  - Able to integrate z/VM and Linux into Enterprise Solution
  - Data warehousing for trend analysis

# Workspaces to Manage z/VM and Linux



## z/VM

- Processors
- SYSTEM Utilization, spinlocks
- Workload
  - Linux Appldata
  - Scaled & total CPU values
- LPAR Utilization
- PAGING and SPOOLING Utilization
- DASD
- Minidisk Cache
- Virtual Disks
- Channels
- CCW Translation
- REAL STORAGE Utilization
- NETWORK Utilization (Hiper Socket and Virtual Switch)
- TCPIP Utilization – Server
- TCPIP Utilization – Users
- Resource Constraint (Wait states)
- System Health


## Linux

- Linux OS
- System Information
  - CPU aggregation
  - Virtual Memory Statistics
- Process
- Users
- Disk Usage
- File Information
- Network

## Have I allocated enough Virtual CPUs to my guest?

- Do not define more virtual CPUs for a Linux guest than are needed.
  - The use of more than one processor requires software locks so that data or control blocks are not updated by more than one processor at a time.
  - Linux makes use of a global lock, and when that lock is held, if another processor requires that lock, it spins.
  - Set the number of virtual processors based on need and not simply match the number of real that are available.
  - Careful when cloning as some Linux guests require more Virtual CPUs (ex: Running Websphere, Oracle) than others.

# Aggregate monitoring of Virtual CPUs

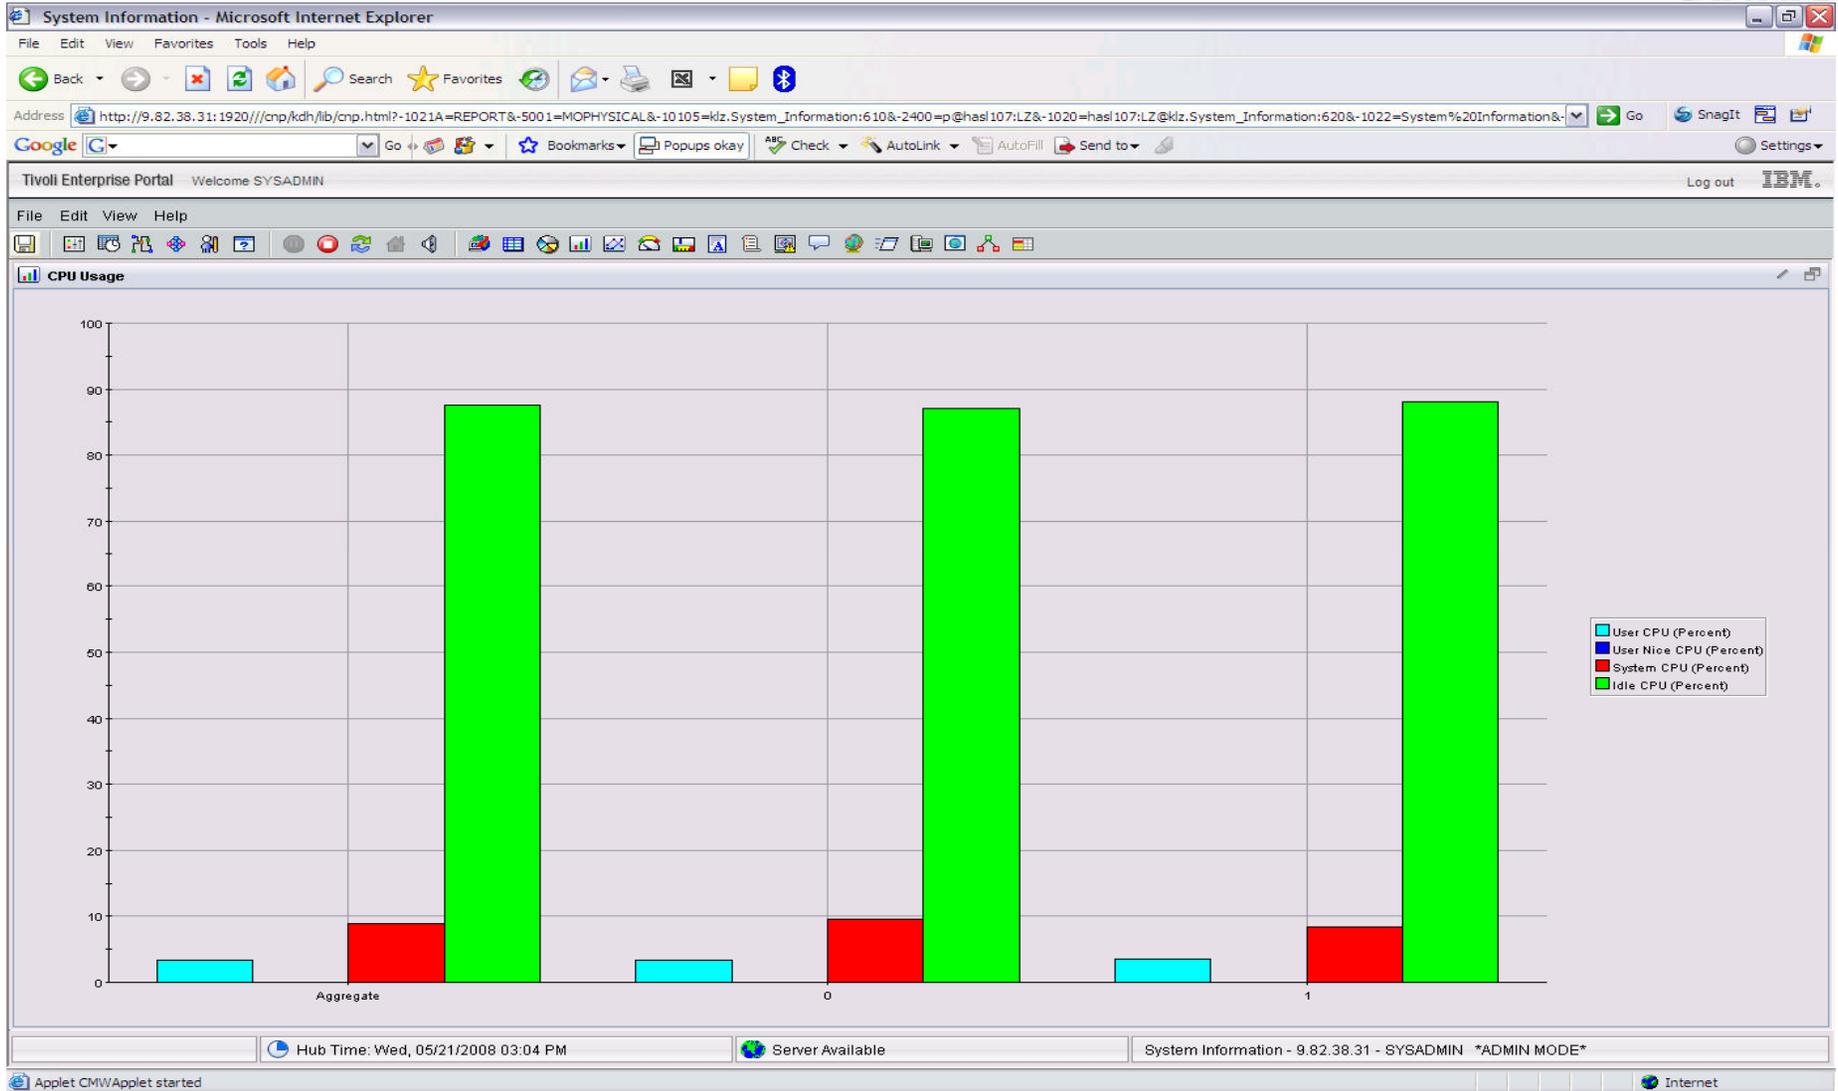

## z/VM Processor Utilization

- **Total Processor Utilization** This is the processor utilization from the VM perspective and includes CP, VM System, and Virtual CPU time.
- **System Time:** This is the processor time used by the VM control program for system functions that are not directly related to any one virtual machine. This should be less than 10% of the total.
- **CP Processor Time:** This is the processor time used by the VM control program in support of individual virtual machines.
- **Virtual Processor Time: (Emulation Time):** This is processor time consumed by the virtual machine and the applications within it.
- **Total to Virtual Ratio** The ratio of total processor time to virtual processor time is often used as an indicator of z/VM efficiency or overhead. The closer to 1.0, the better the z/VM efficiency. RoT: Should explore causes of a ratio over 1.30.

# System Processor Utilization Workspace

Tivoli Enterprise Portal Welcome Mike Sine Log out IBM

File Edit View Help


Navigator View: Physical

- z/OS Systems
- z/VM Systems
  - has1115VL
    - z/VM Linux Systems
      - Channel
      - CP Owned Devices
      - DASD
      - LPAR
      - Network
      - Real Storage
      - System
      - TCPIP
      - Workload


Physical

CPU Utilization


CP Percent of CPU

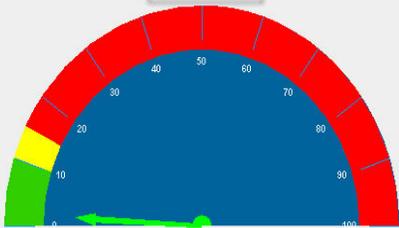


Percent of CPU

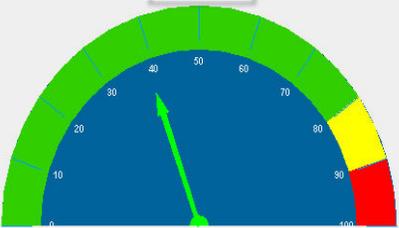


Current Users

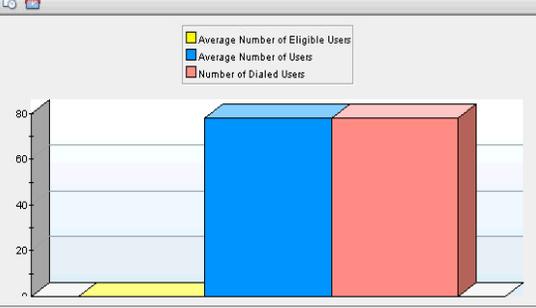

Total to Virtual Ratio

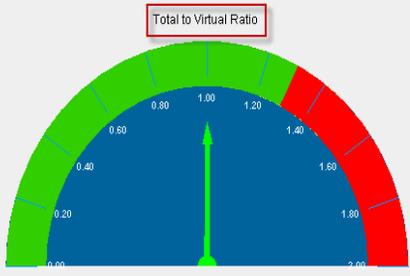

User Dispatching Queues

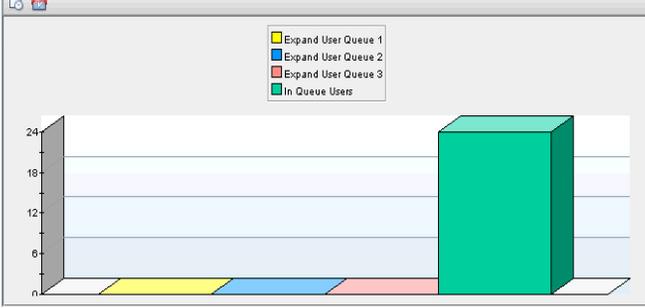

System Utilization

Time	System ID	LPAR Name	Active Users	Average Number of Users	Tasks in Wait	CP Percent of CPU	Percent of CPU	Number Active CPU's	Number of Dialed Users	Average Number of Eligible Users	Expand User Queue 1	Expand User Queue 2	Expand User Queue 3	LPAR Busy Percent	Non-Trivial Trans Rate	Trivial Transaction Rate	Total to Virtual Ratio	In Queue Users	I/O Operation Wait Queue	System Transaction Rate	Users Waiting for Resources
05/13/11 15:17:09	ZVMV5R40	BOSPA	34	78	0	2	39	4	78	0.00	0.00	0.00	0.00	39.80	1.86	6.26	1.00	24	0	5.70	0

# z/VM Workload Workspace



Workload - NPMIPSVT3 - SYSADMIN

File Edit View Help

View: Physical

- CP Owned Devices
  - DASD
  - LPAR
  - Network
  - Real Storage
  - System
  - TCPIP
  - Workload

Physical

**Top 5 CPU Users**

User	CP % of CPU	Virtual CPU %
KWUSER1	~35	~10
PERFKIT3	~10	~5
PERFKIT4	~5	~2
MPROUTE	~2	~1
KWUSER2	~1	~0.5

**Top 5 Page Rate**

User	Page Rate
GOS	~0.8
EREP	~0.1
DIRMAINT	~0.05
DATAMOVE	~0.02
OOOCPPOOF	~0.01

**Top 5 Paging Operations**

User	Page Reads	Page Writes
GOS	~0.8	~0.8
EREP	~0.1	~0.1
DIRMAINT	~0.05	~0.05
DATAMOVE	~0.02	~0.02
OOOCPPOOF	~0.01	~0.01

**Top 5 Working Set Size**

User	Working Set Size
KWUSER1	~250,000
KWUSER2	~150,000
OOOCPPOOF	~50,000
PERFKIT4	~30,000
PERFKIT3	~20,000

All z/VM Workloads


	System ID	User ID	Total CP % of CPU	CP Seconds	Total CPU Percent	CPU Seconds	Session Time	Total Virtual CPU%	Working Set Size	Workload Group	Linux Guest ID	Virtual CPUs	CP % of CPU	CPU Percent	Virtual CPU %
7	GDLVICOM	KWUSER3	0.01	0	0.05	0	1	0.04	56768			2	0.00	0.02	0.02
7	GDLVICOM	KWUSER2	0.01	0	0.21	0	1	0.20	194666			2	0.01	0.10	0.10
7	GDLVICOM	OPERSYMP	0.00	0	0.00	0	1	0.00	1327			1	0.00	0.00	0.00
7	GDLVICOM	PERFI3	0.00	0	0.00	0	1	0.00	2331			1	0.00	0.00	0.00
7	GDLVICOM	PERFKIT1	0.01	0	0.17	0	1	0.16	3460			1	0.01	0.17	0.16
7	GDLVICOM	PERFKIT2	0.02	0	0.11	0	1	0.09	4683			1	0.02	0.11	0.09
7	GDLVICOM	PERFKIT3	0.25	0	7.30	4	1	7.05	64679	LINUX	VIC.PERFKIT3:LZ	1	0.25	7.30	7.05
7	GDLVICOM	PERFKIT4	0.04	0	0.35	0	1	0.31	65431			1	0.04	0.35	0.31
7	GDLVICOM	PERFKIT5	0.01	0	0.15	0	1	0.14	1			1	0.01	0.15	0.14
7	GDLVICOM	DOBTMAP	0.00	0	0.00	0	1	0.00	453			1	0.00	0.00	0.00

Hub Time: Tue, 08/18/2009 09:48 AM    Server Available    Workload - NPMIPSVT3 - SYSADMIN

# Spin Lock Wait

- **Time Spinning on Locks Percent:**
  - The percentage of time processors spend spinning on formal spin locks. RoT: Should be less than 10%.
  - Increases as number of logical processors increases.


# Spinlock Workspace

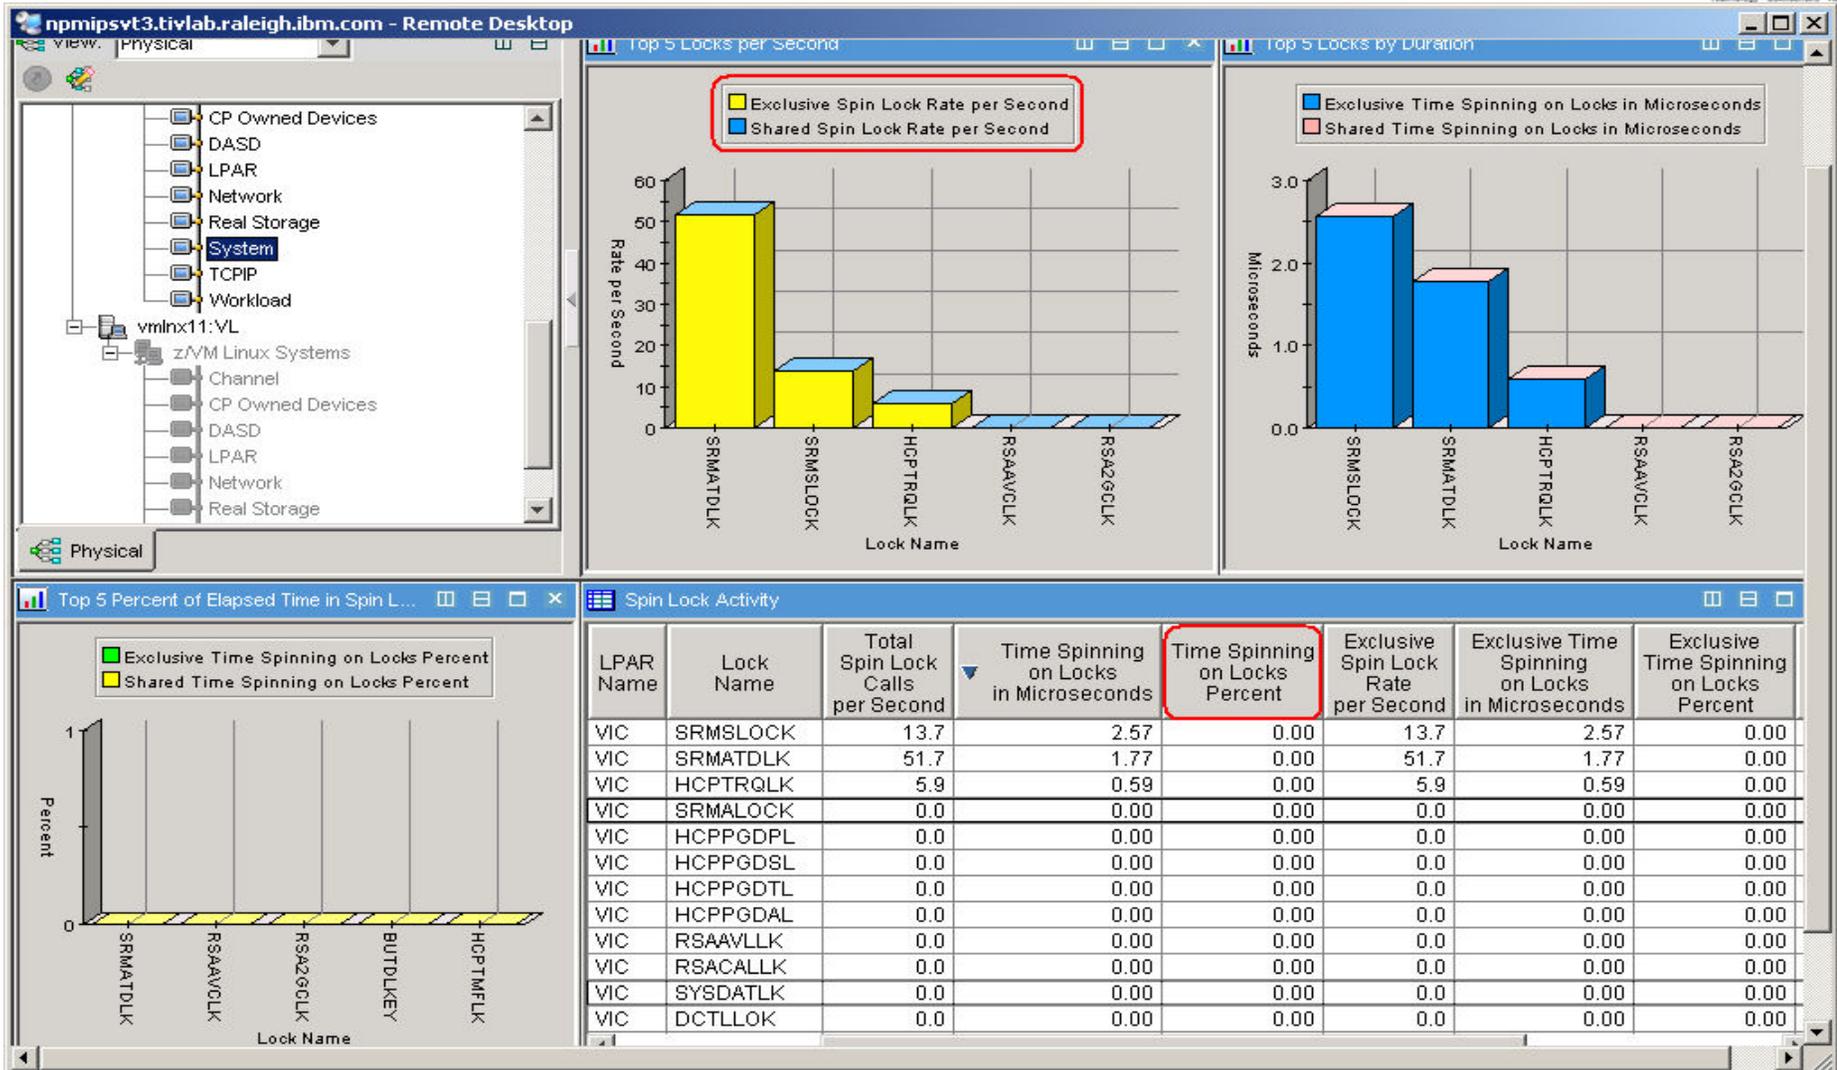


## Is my Linux guest sized correctly?

- In general, do not define the Linux virtual machine larger than you need.
  - Excessive virtual machine sizes negatively impact performance.
  - Linux uses any extra storage for caching of data. For shared resources, this is an impact.
  - Reduce the size of the Linux guest until it starts to swap (use VDISK for swap).
  - A good exercise is to compare Linux memory usage to z/VM working set size for the guest.


# Need breakdown of memory use

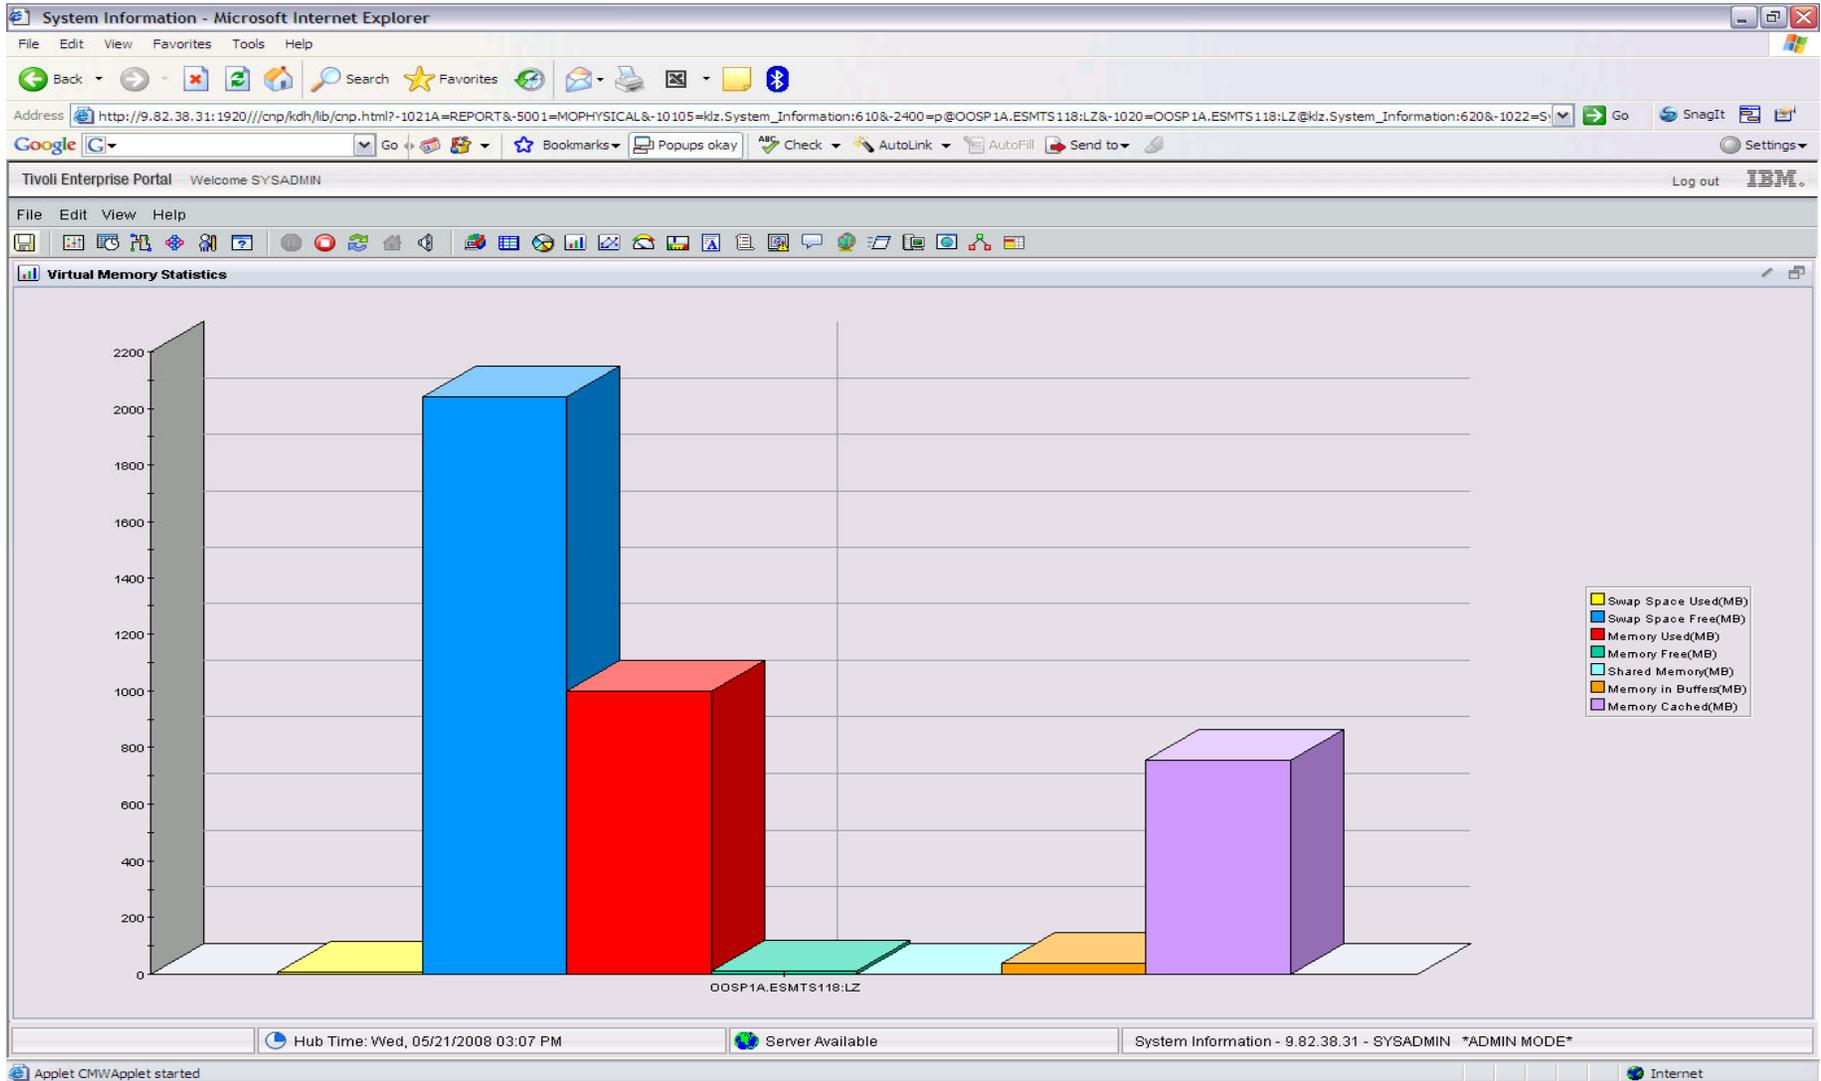

# Working Set Size

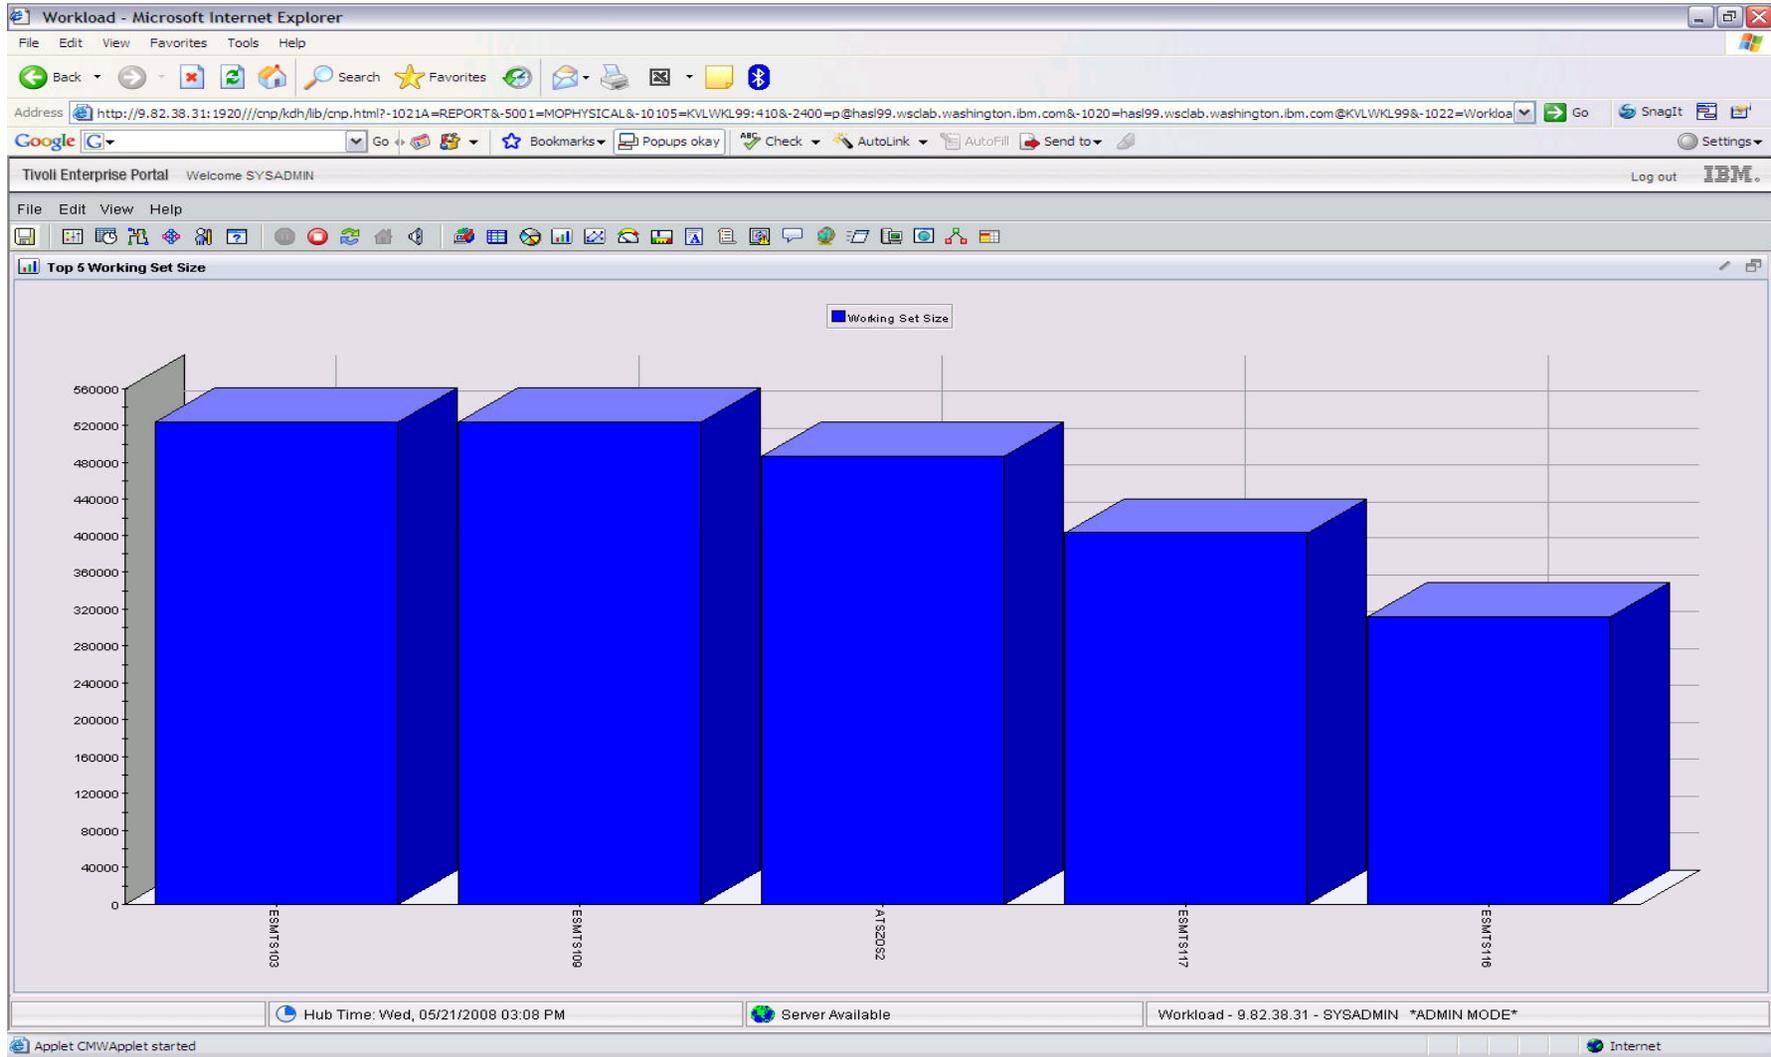

# Page/Swap Attributes

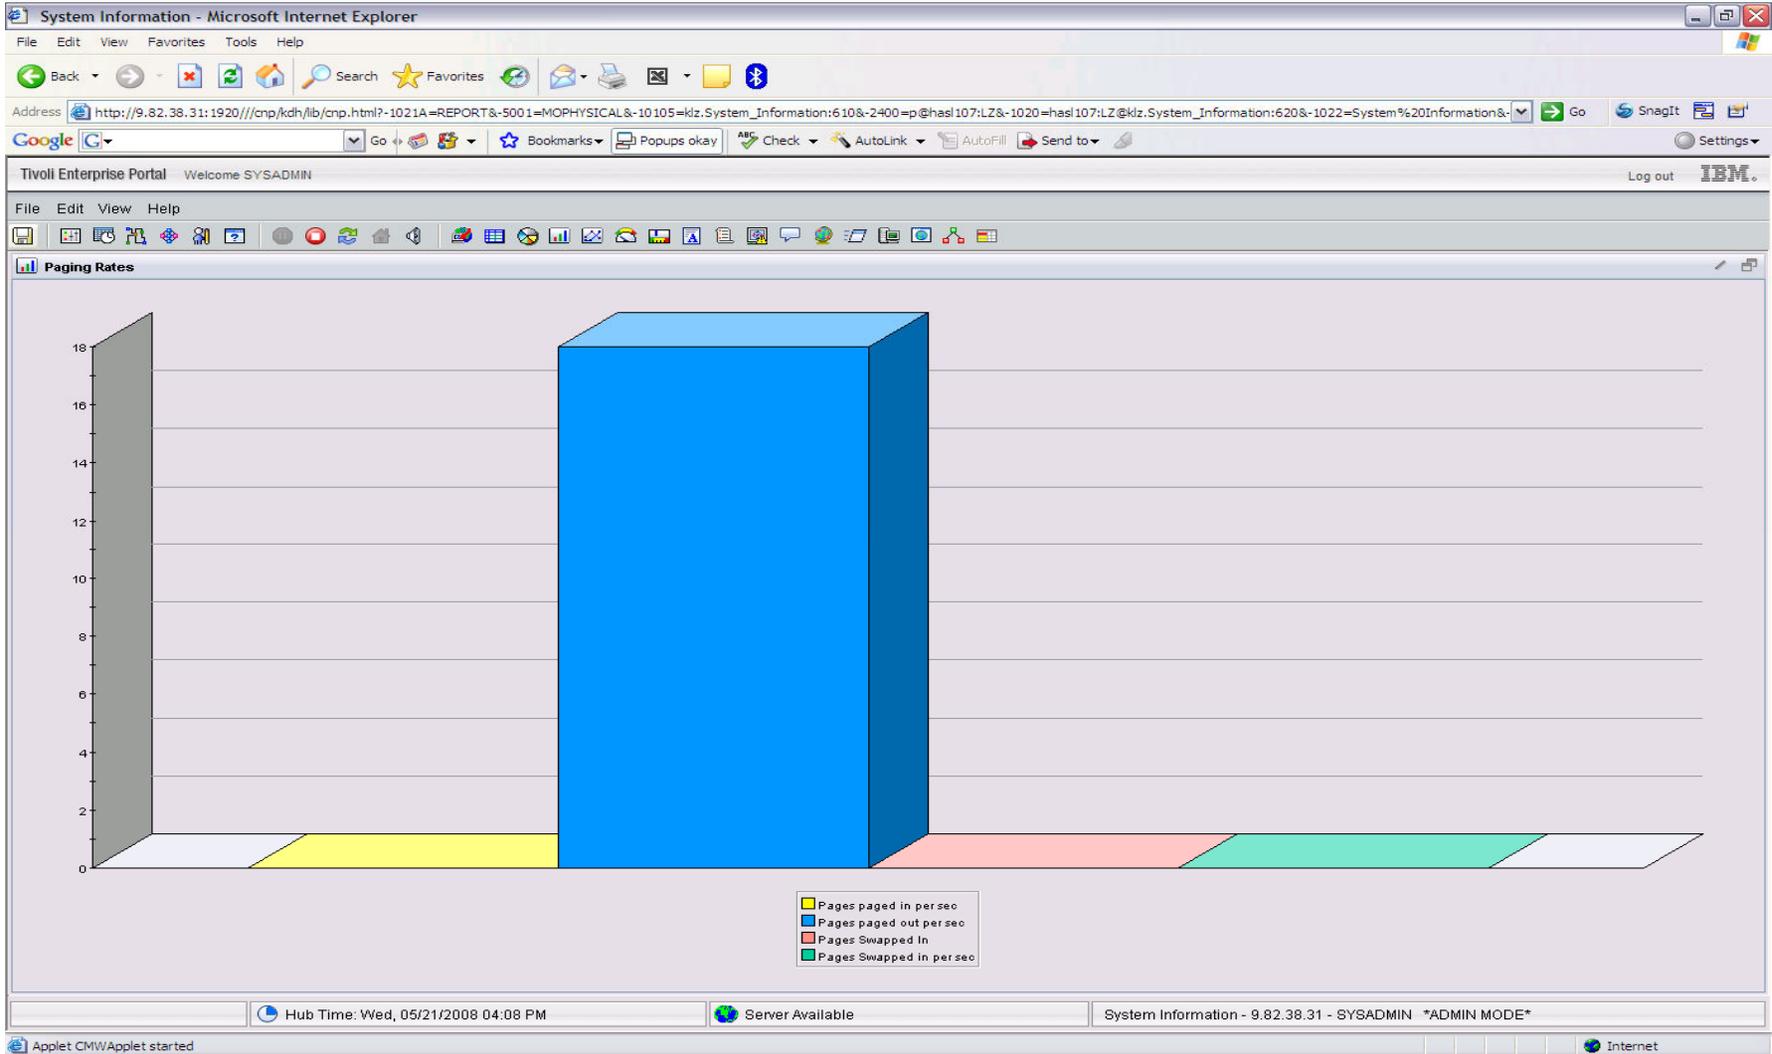

# VDISK

- What is it?
  - FBA (Fixed Block Architecture disk) device emulated in-memory
    - Translation: Very fast “device”.
  - High performance paging device for Linux on z.
  - Memory is allocated by CP from the Dynamic Paging Area
  - Allocated only when referenced
    - Allocating a 10 MB device does NOT instantly consume 10 MB of pages.
    - Pages are allocated when needed.
  - Not recommended in a storage-constrained z/VM system.

# VDISK Workspace



VDISK - KYASH3 - SYSADMIN

File Edit View Help

Navigator View: Physical

- Windows Systems
- z/VM Systems
  - vmlnx11.VL
    - z/VM Linux Systems
      - Channel
      - CP Owned Devices
      - DASD**
      - LPAR
      - Network
      - Real Storage
      - System
      - TCPIP
      - Workload

Physical

### Top 5 Paging Rates per Second

Rate per Second

VDISK Owner & Device Number

### Top 5 Expanded Storage Paging Rate...

Rate per Second

VDISK Owner & Device Number

### Top 5 Pages in Use

Page Count

VDISK Owner & Device Number

### Virtual Disk Activity

Page: 1 of 2


Time	System ID	LPAR Name	VDISK Owner	Device Number	VDISK Size	Number of Links	Virtual I/O's per Second	Pages Stolen per Second	Pa: fro pe
04/06/09 23:35:51	GDLVM7	GDLVM7	ACKERK	0299	100,000	1	0.00	0.00	
04/06/09 23:35:51	GDLVM7	GDLVM7	ANGELOM	0700	7,000,000	1	0.00	0.00	
04/06/09 23:35:51	GDLVM7	GDLVM7	AVATAR	1111	4,000,000	1	0.00	0.00	
04/06/09 23:35:51	GDLVM7	GDLVM7	BIGANG	0700	7,000,000	1	0.00	0.00	
04/06/09 23:35:51	GDLVM7	GDLVM7	BRIANKT	0F00	1,440,000	1	0.00	0.00	
04/06/09 23:35:51	GDLVM7	GDLVM7	CORAKR	05FF	10,000,000	1	0.00	0.06	
04/06/09 23:35:51	GDLVM7	GDLVM7	CORAK2	05FF	20,000	1	0.00	0.00	
04/06/09 23:35:51	GDLVM7	GDLVM7	CRASTDA	0999	4,000,000	1	0.00	0.01	
04/06/09 23:35:51	GDLVM7	GDLVM7	DENISE	1111	4,000,000	1	0.00	0.00	
04/06/09 23:35:51	GDLVM7	GDLVM7	DENISE	020E	5,000,000	1	0.00	0.00	
04/06/09 23:35:51	GDLVM7	GDLVM7	DENISE2	1111	4,000,000	1	0.00	0.00	

Hub Time: Mon, 04/06/2009 11:38 PM    Server Available    VDISK - KYASH3 - SYSADMIN

# Memory Configuration

- Plan on a virtual to real (V:R) memory ratio in the range of 1.5:1 to 3:1.
- z/VM's architecture still benefits from expanded storage:
  - Serves as high speed cache.
  - Increases consistency of response time.
  - See <http://www.vm.ibm.com/perf/tips/storconf.html> for the gory details.
- Rule of Thumb - start with 20-25% of memory configured as expanded:
  - The lower the paging rate, the lower the amount of expanded storage required.
  - The greater the number of page frames available in central storage above 2GB, the higher the amount of expanded storage required.
  - Some workloads 2–4GB of expanded storage is sufficient, 1GB minimum. However, more and more Linux systems are running heavy workloads and the 20-25% rule still applies.


# OMEGAMON Memory Configuration

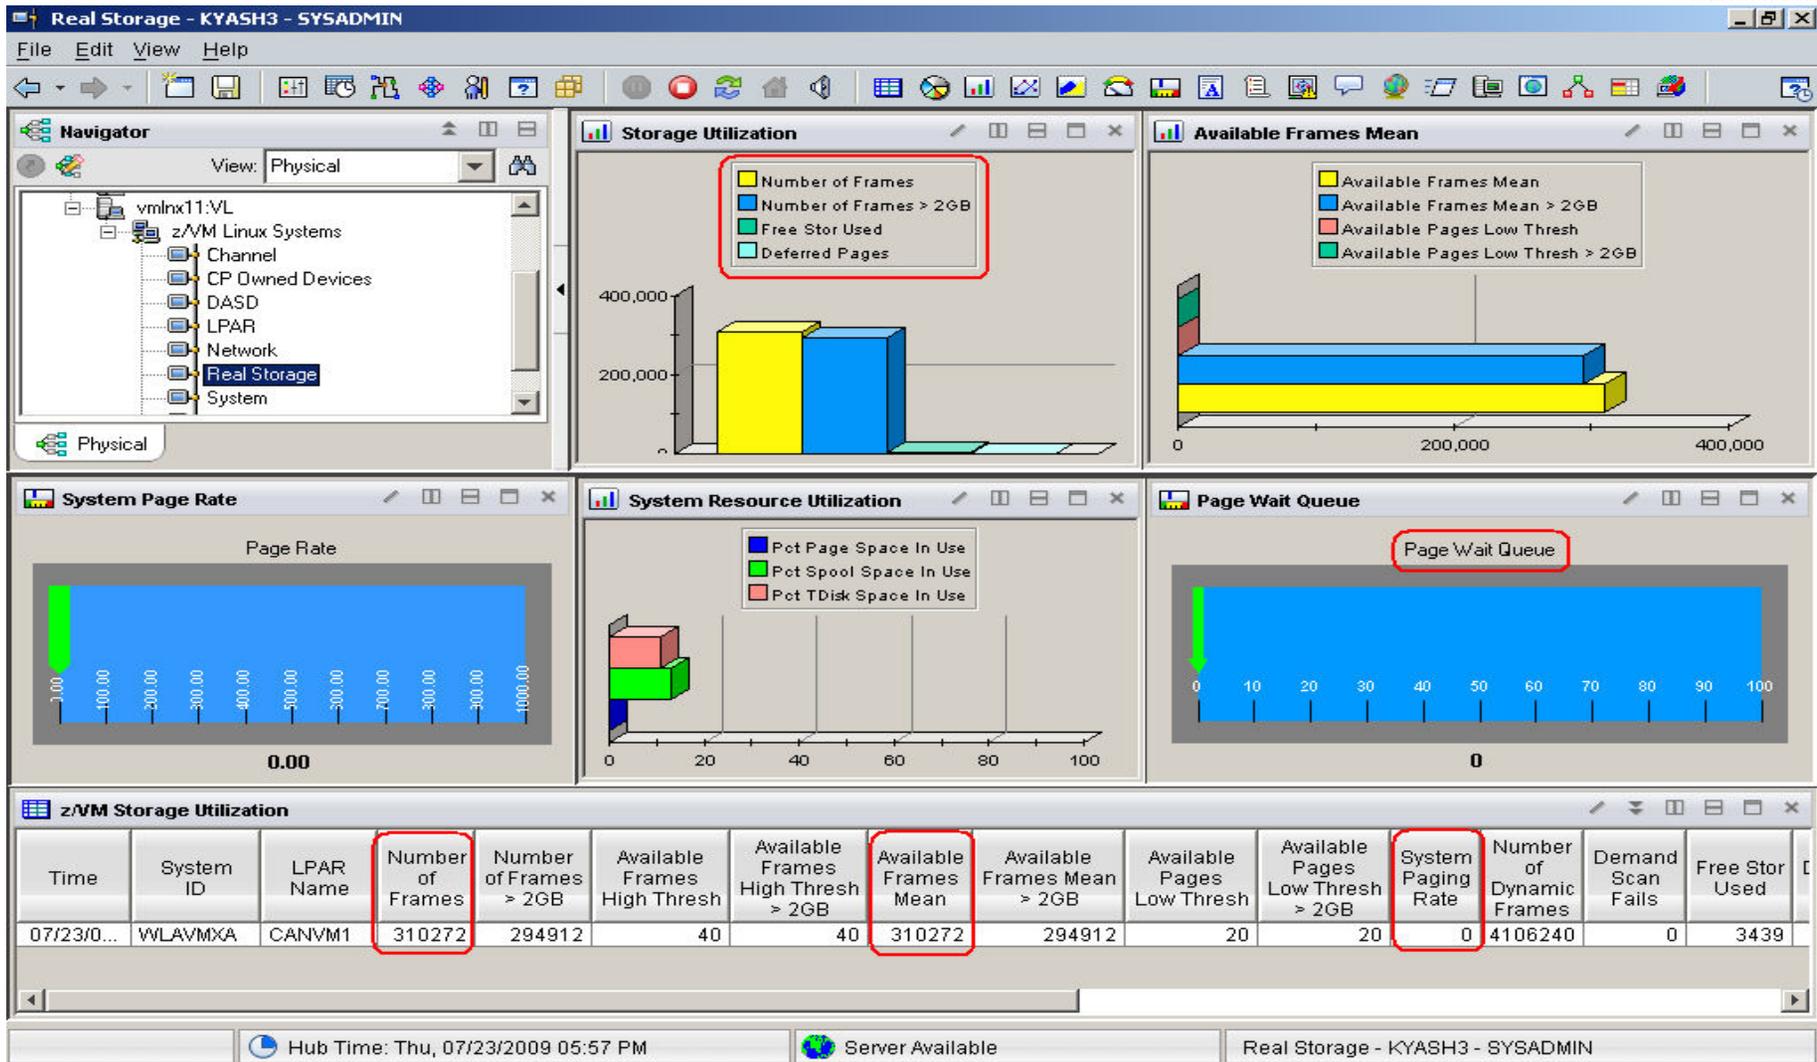


# Paging Subsystem

- Plan for DASD page space utilization < 50%:
  - Page space tends to get fragmented over time.
  - Large contiguous free space allows for greater paging efficiency.
  - Monitor usage with OMEGAMON XE or Q ALLOC PAGE command.
- Do not mix page space with any other space on a volume.
- Recommend using devices of the same size/geometry.
- Calculation guidelines are located in the CP Planning and Administration Manual.

# OMEGAMON CP Owned Devices – Paging Subsystem

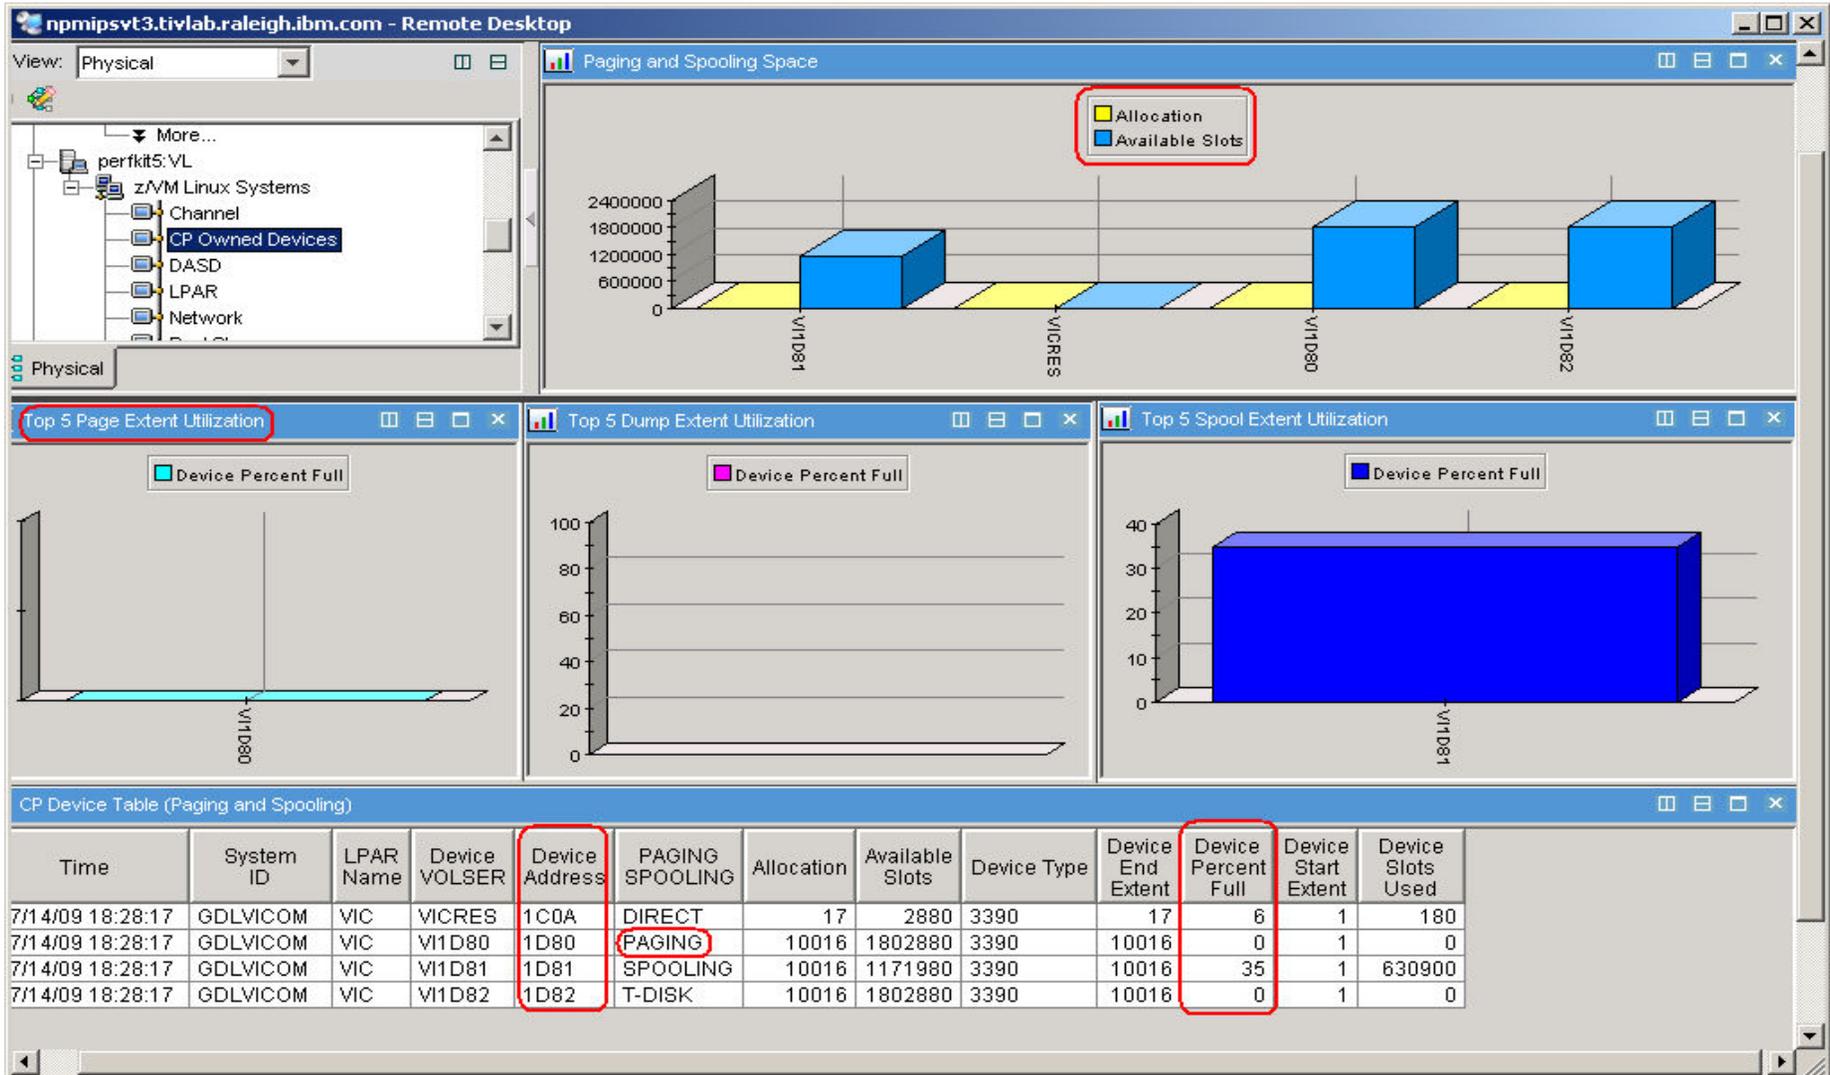

# z/VM Page Attributes

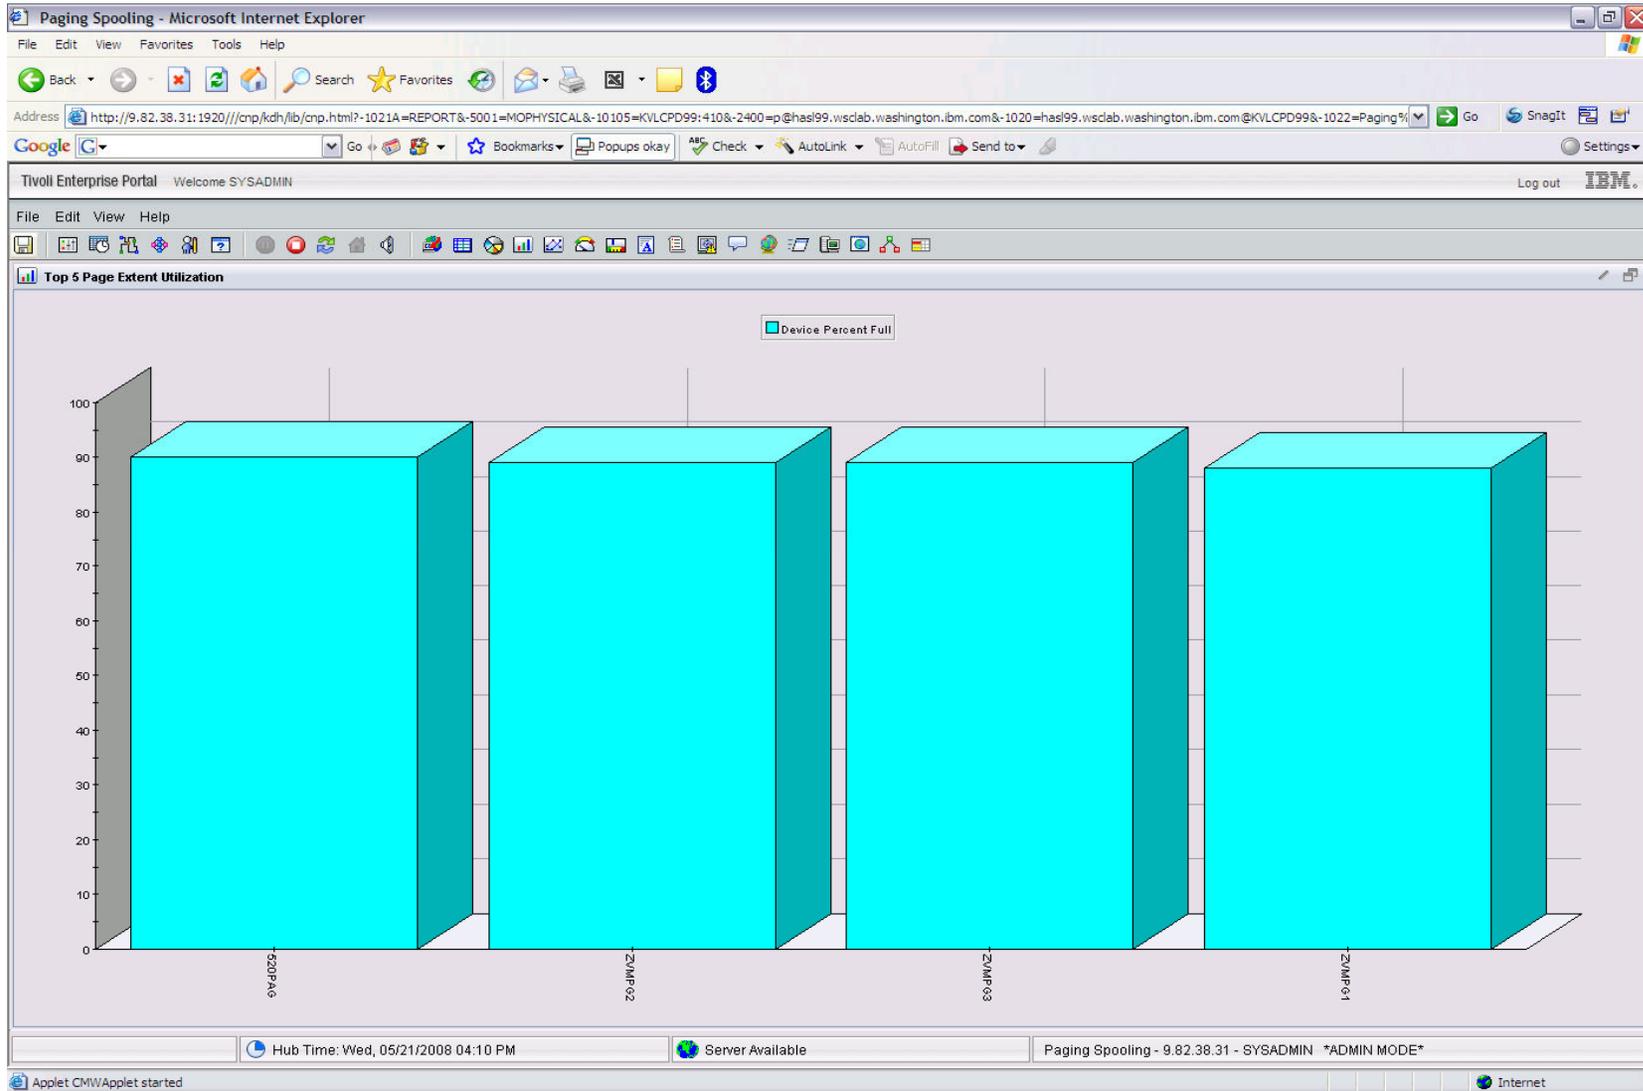


# Minidisk Cache

- z/VM minidisk cache is a write-through cache:
  - Improves read I/O performance.
  - But it's not free.
- Not recommended for:
  - Memory constrained systems.
  - Linux swap file disks.
  - Flashcopy targets (see next chart)
- Default system settings are less than optimal.
- Recommended settings:
  - Eliminate MDC in expanded storage.
    - **SET MDC XSTORE 0M 0M**
  - Limit MDC in central storage – 10% is a good starting point.
    - **SET MDC STORE 0M 256M**
  - Monitor with product like OMEGAMON XE and/or the Q MDC command.

## MDC and FlashCopy Interaction

- FlashCopy requests require z/VM to flush MDC for the entire minidisk.
- MDC Flush processing is very expensive even when there is no data in MDC to flush
  - System Time becomes very high.
- z/OS DFSMS and other utilities can make extensive use of FlashCopy for functions such as defragmentation
- Mitigations
  - Turn off MDC for minidisks that are FlashCopy targets

# OMEGAMON MDISK Cache Allocations

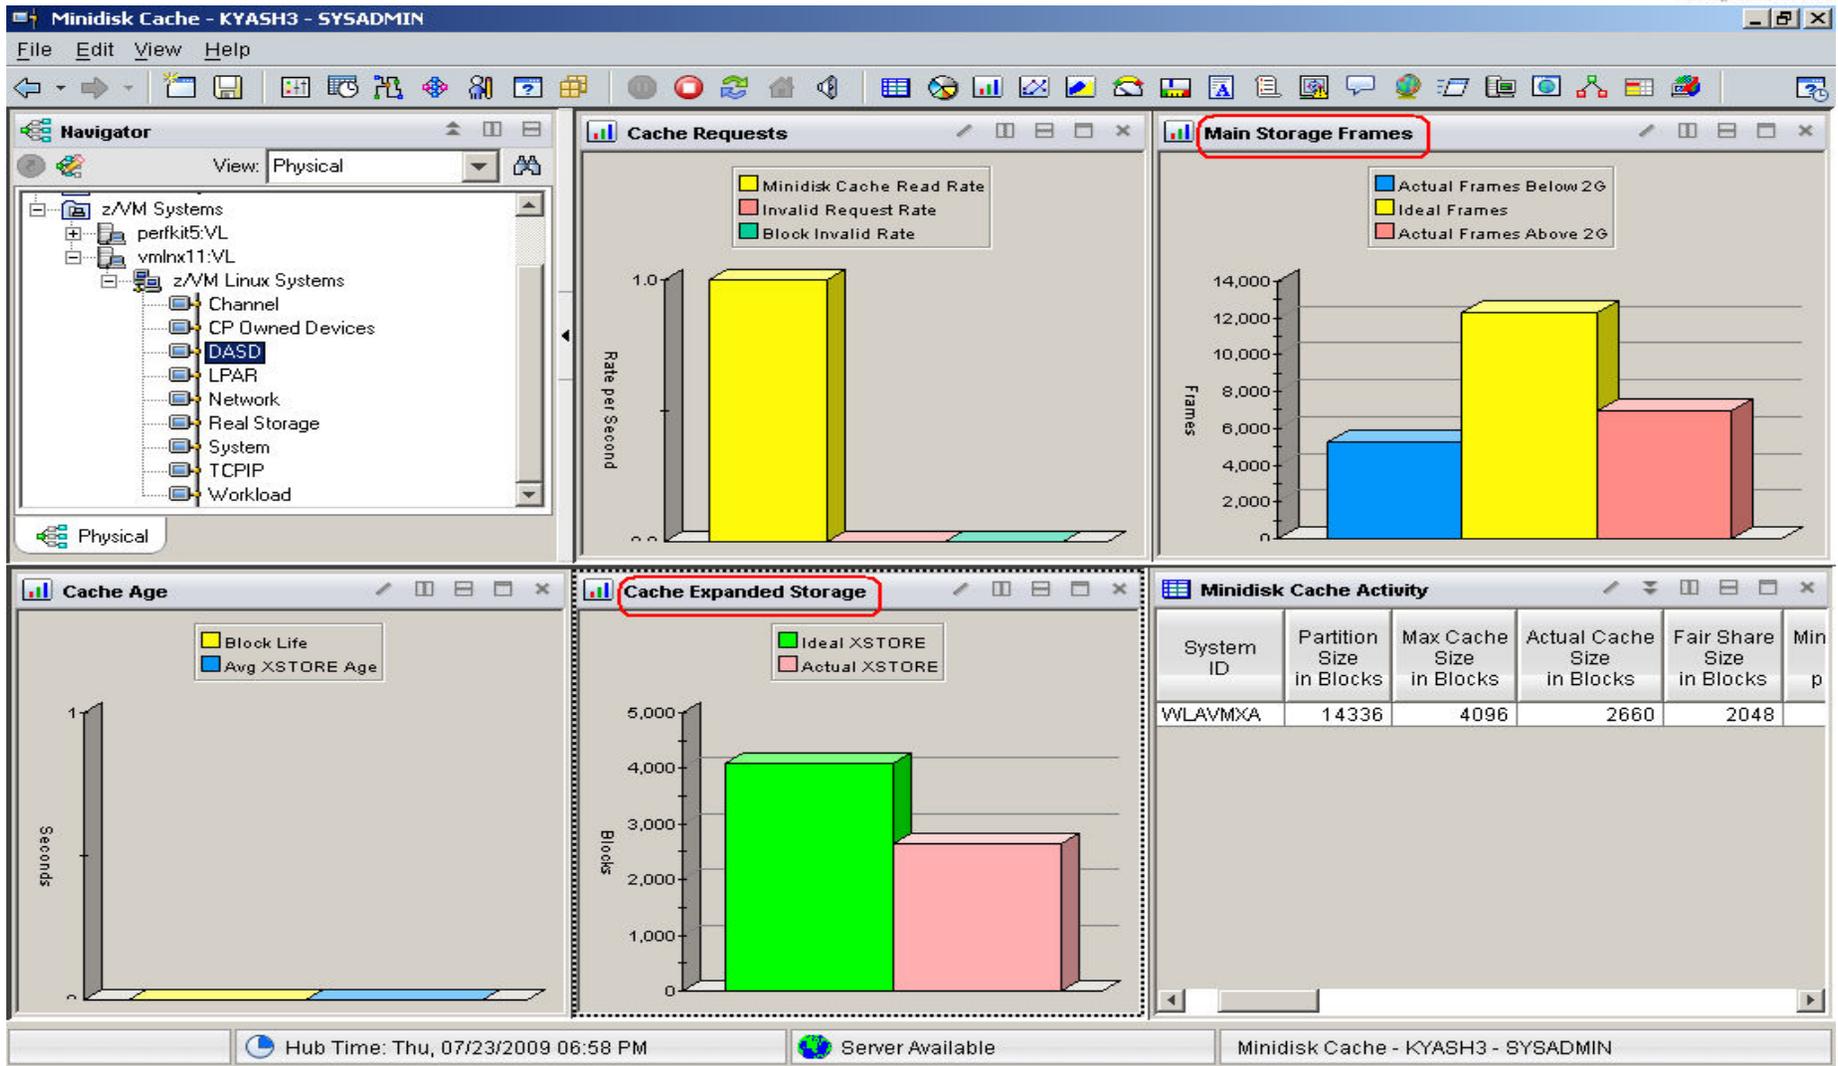

# OMEGAMON MDISK Cache Allocations – p. 2



Minidisk Cache - KYASH3 - SYSADMIN

File Edit View Help

Minidisk Cache Activity

Block validates per Second	Full Read Hit Percent	Ideal Frames	Actual Frames Below 2G	Actual Frames Above 2G	Minimum Storage Frames	Maximum Storage Frames	Pages Deleted per Second	Steal Invoked per Second	MDC Bias	Ideal XSTORE in Blocks	Actual XSTORE in Blocks	Minimum XSTORE in Blocks	Maximum XSTORE in Blocks	XSTORE Pages Deleted per Second	XSTORE Pages Deleted per Second
0.00	100.00	12288	5057	6306	2048	12288	0.00	0.00	1.00	4096	3928	1024	4096	0.00	

# Direct Access Storage Devices (DASD)

- **Avg Pending Time for DASD**
  - Average pending time for real DASD I/Os. RoT: Should be less than 1 millisecond.
- Items worth keeping an eye on:
  - **Number of I/O's per Second, Percent Busy**
  - **Avg Service Time** Average service time for real DASD devices (sum of the pending, connect, and disconnect times).
  - **DASD I/O Rate** Rate of traditional real I/Os per second to real DASD devices. Worth monitoring.

# DASD I/O Workspace

DASD - KYASH3 - SYSADMIN


File Edit View Help

Navigator View: Physical

- z/VM Systems
  - perkit5:VL
  - vmnx11:VL
  - z/VM Linux Systems
    - Channel
    - CP Owned Devices
    - DASD**
    - LPAR
    - Network
    - Real Storage
    - System
    - TCPIP
    - Workload


Physical

**Top 5 Device Busy**

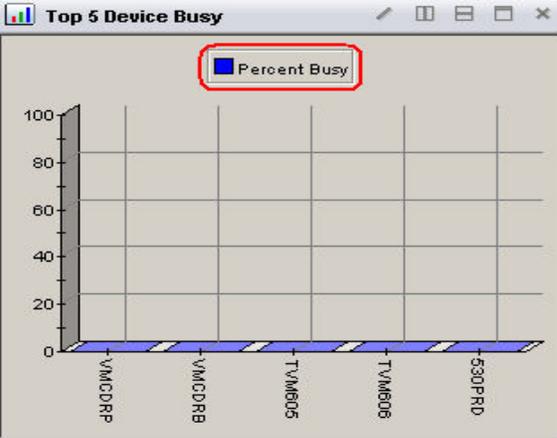


■ Percent Busy

**Top 5 I/O Rate**

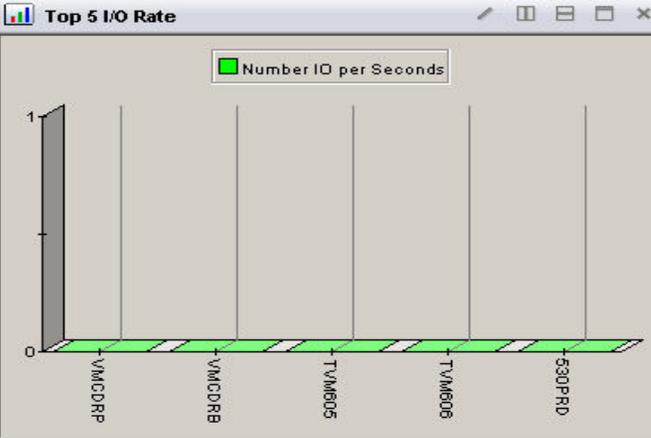

■ Number IO per Seconds


**Top 5 Servi...**

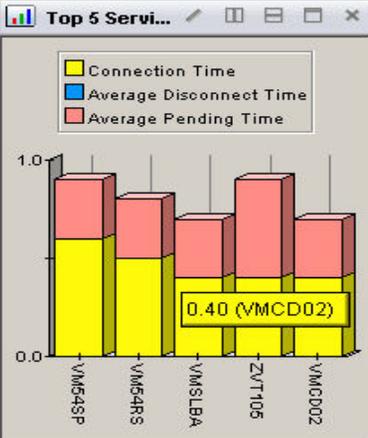

■ Connection Time  
■ Average Disconnect Time  
■ Average Pending Time

0.40 (VMCD02)

**Top 5 I/O...**

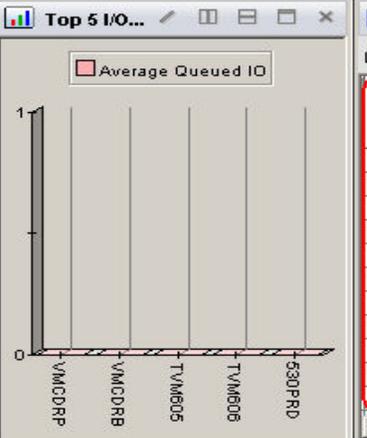

■ Average Queued IO

**DASD I/O Activity**

Volume Serial Number	Device Address	Device Type	Connection Time	Percent Busy	Average Queued IO	Average Service Time	Number IO per Second	Average Disconnect Time
VM54SP	5A1A	3390	0.60	0	0.00	0.90	3	0.00
VM54RS	5AE9	3390	0.50	0	0.00	0.80	0	0.00
VMSL51	5A57	3390	0.40	0	0.00	0.70	0	0.00
VMSL54	5A5A	3390	0.30	0	0.00	0.70	0	0.00
VMSL50	5A56	3390	0.30	0	0.00	0.70	0	0.00
VM53PA	5A08	3390	0.40	0	0.00	0.70	0	0.00
VMCD02	5A04	3390	0.40	0	0.00	0.70	0	0.00
VMSL53	5A59	3390	0.30	0	0.00	0.70	0	0.00
VMCD05	5A3A	3390	0.30	0	0.00	0.60	0	0.00
VMSLHC	5A39	3390	0.30	0	0.00	0.60	0	0.00
VM54GS	5A35	3390	0.30	0	0.00	0.60	0	0.00

Page: 1 of 2

Hub Time: Fri, 07/24/2009 12:06 PM    Server Available    DASD - KYASH3 - SYSADMIN


# System Dump & Spool Space

- Dump Space
  - Ensure there is sufficient dump space defined to the system.
  - Dump space requirements vary according to memory usage.
    - Q DUMP – identifies allocated dump space.
    - Calculation guidelines are located in CP Planning and Administration Manual.
- Spool Space
  - Various uses:
    - User printer, punch, reader files (console logs)
    - DCSS, NSS
    - System files
    - Page space overflow
  - Spool Management:
    - Monitor with OMEGAMON, Operations Manager, Q ALLOC SPOOL cmd
    - SFPURGER utility:
      - *Rule based tool to clean up spool space.*
      - *Included in the no charge CMS Utilities Feature (CUF).*

# VMDUMP Processing Concern


- VMDUMP is a very helpful command for problem determination.
- Some weaknesses:
  - Does not scale well, can take up to 40 minutes per GB.
  - It is not interruptible
    - APAR VM64548 is open to address this.
- Linux provides a disk dump utility which is much faster relative to VMDUMP.
  - It is disruptive
  - Does not include segments outside the normal virtual machine.
- See <http://www.vm.ibm.com/perf/tips/vmdump.html>

# System Dump & Spool Space

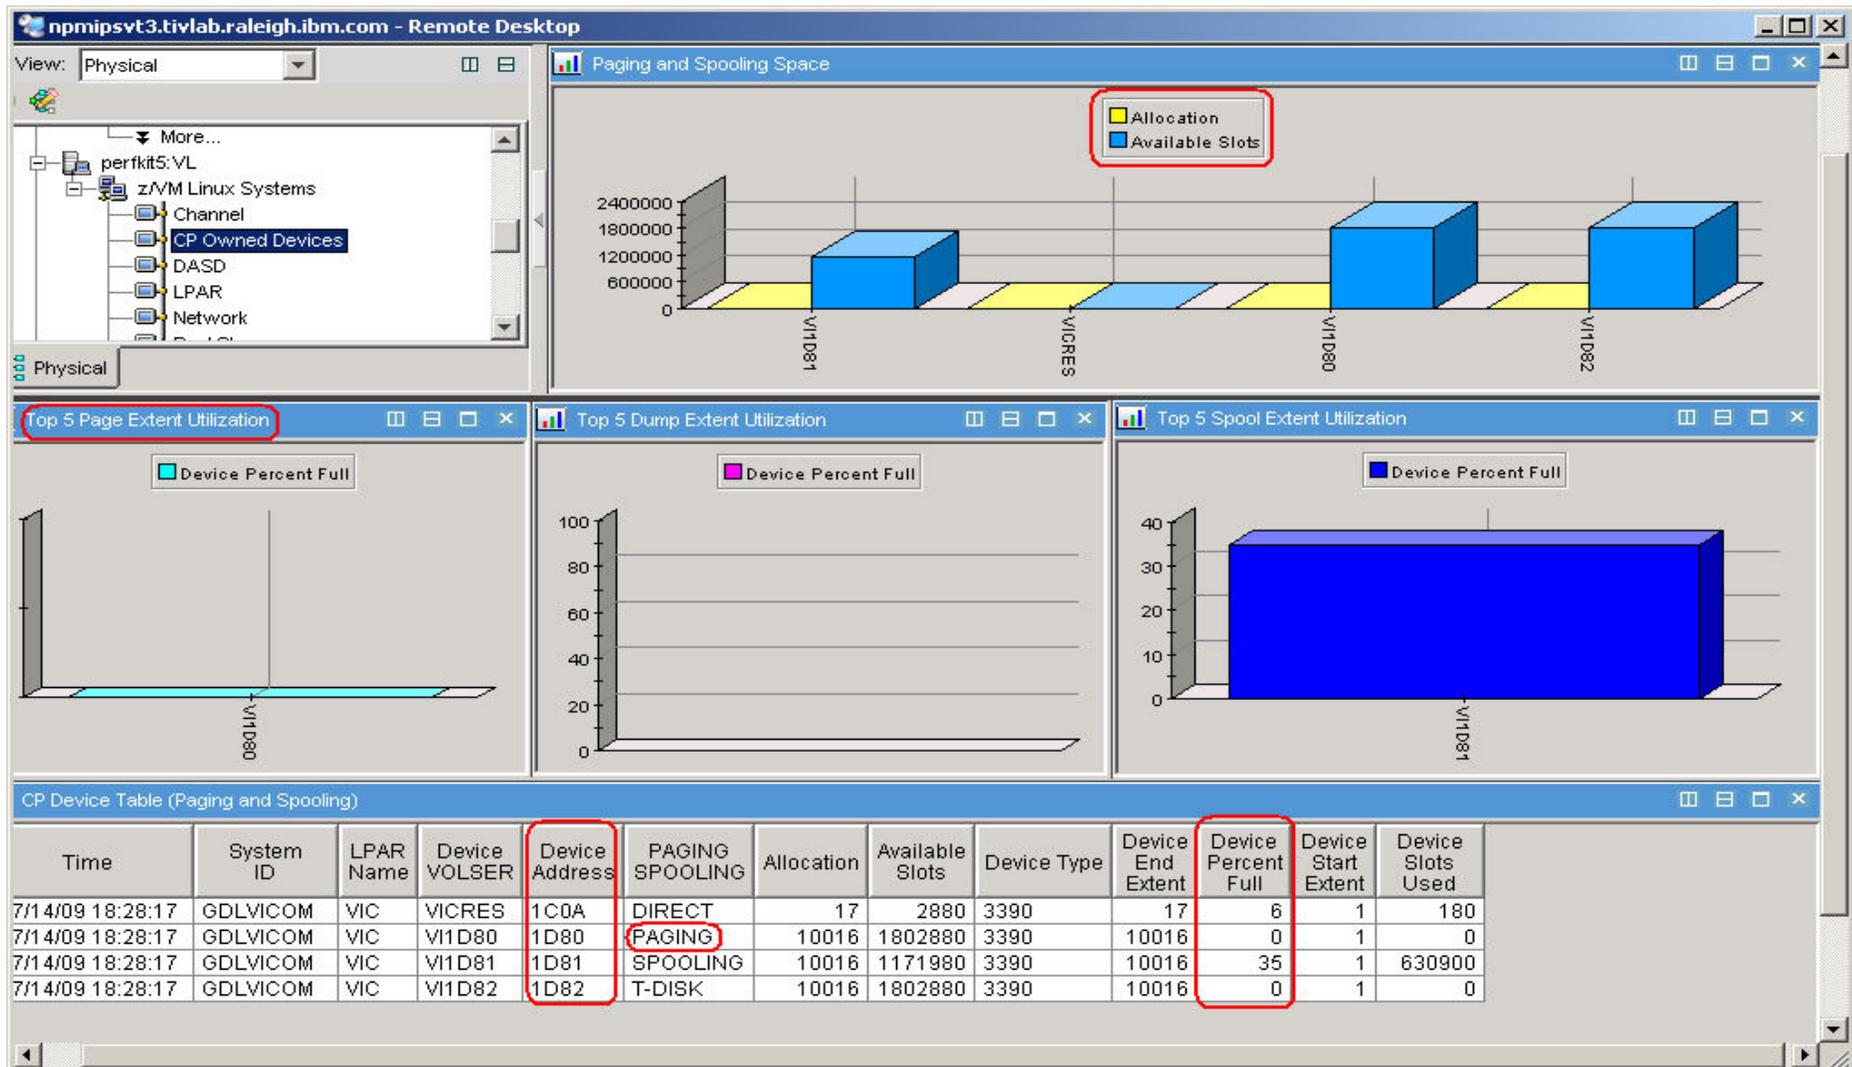

# Tips—Overall Health of Your System

At a quick glance you can see the %CPU usage, what your overcommit ratio is, the number of users in a wait state, and paging rates of all your z/VM systems

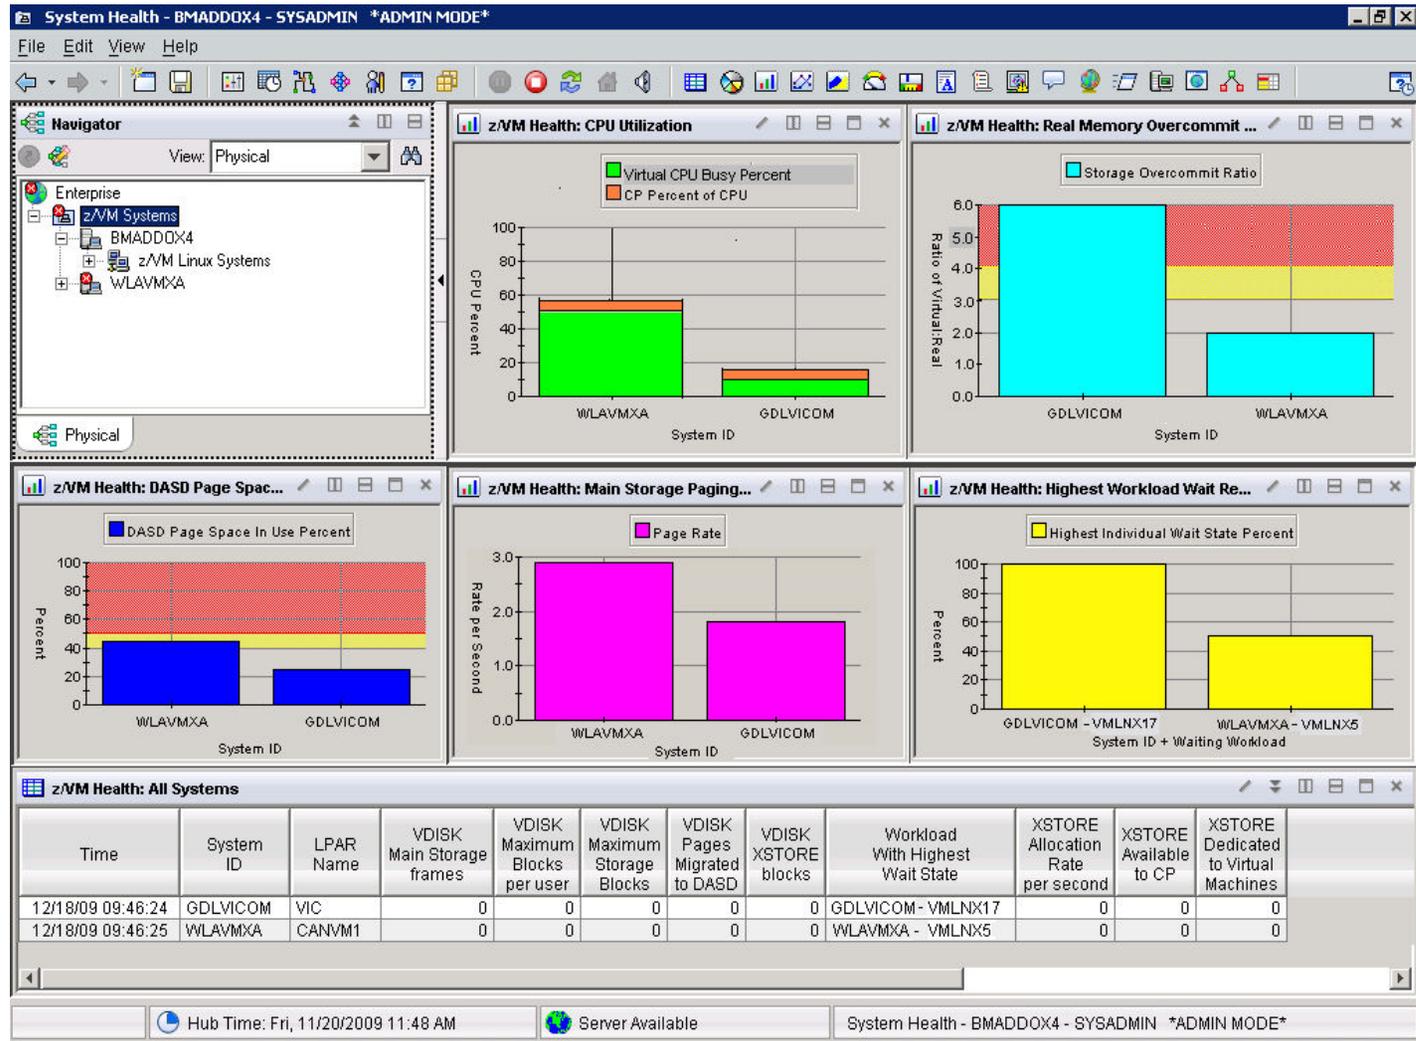

# Resource Constraint Analysis (Waits)



Resource Constraint - KYASH3 - SYSADMIN

File Edit View Help

Navigator View: Physical

- z/VM Link Systems
  - Channel
  - CP Owned Devices
  - DASD
  - LPAR
  - Network
  - Real Storage
  - System
  - TCPIP
  - Workload

Physical

### Top 5 Workloads Waiting for Resources

Workload	CPU Wait Percent	Loading Percent	Page Wait Percent	I/O Wait Percent	Instruction Simulation Wait Percent
VMLNX11	10	0	0	0	4
VMLNX14	10	0	0	0	0
VMLNX5	10	0	0	0	0
VMLNX16	3	0	0	0	4
VSMPROXY	0	0	0	0	1

### Top 5 I/O Wait Percent

### Top 5 CPU Wait Percent

### Top 5 Page Wait Percent

### All z/VM Workload Resource Constraint

Time	System ID	LPAR Name	User ID	Active Percent	Running Percent	CPU Wait Percent	Loading Percent	Page Wait Percent	I/O Wait Percent	Instruction Simulation Wait Percent	Test Idle Wait Percent	Console Function Wait Percent	SVM and Test Idle Wait Percent	SVM and Eligible List Wait Percent	SVM Dorr List Per
01/19/10 20:56:17	WLAVMXA	CANVM1	>System<	17	3	5	0	0	0	1	62	0	0	0	
01/19/10 20:56:17	WLAVMXA	CANVM1	VMLNX11	100	3	10	0	0	0	3	83	0	0	0	
01/19/10 20:56:17	WLAVMXA	CANVM1	VMLNX14	100	7	10	0	0	0	0	83	0	0	0	

Hub Time: Tue, 01/19/2010 08:56 PM    Server Available    Resource Constraint - KYASH3 - SYSADMIN


## Do not ignore the hardware!

- Just because Linux resources are virtual, do not ignore the hardware!
  - Hardware is another potential layer of shared resources.
  - LPAR weight, CPU sharing, LPAR load, and other attributes need to be monitored for overall system performance.
  - The measurement should include the entire CEC and not just the LPAR hosting z/VM.

# Processors

- Logical Processors
  - LPAR recommendation – no greater than a 4:1 logical to real ratio.
  - z/VM 5.1 - z/VM 5.2 support up to 24 processors.
  - z/VM 5.3 - z/VM 6.1 support up to 32 processors.

# LPAR Utilization Workspace

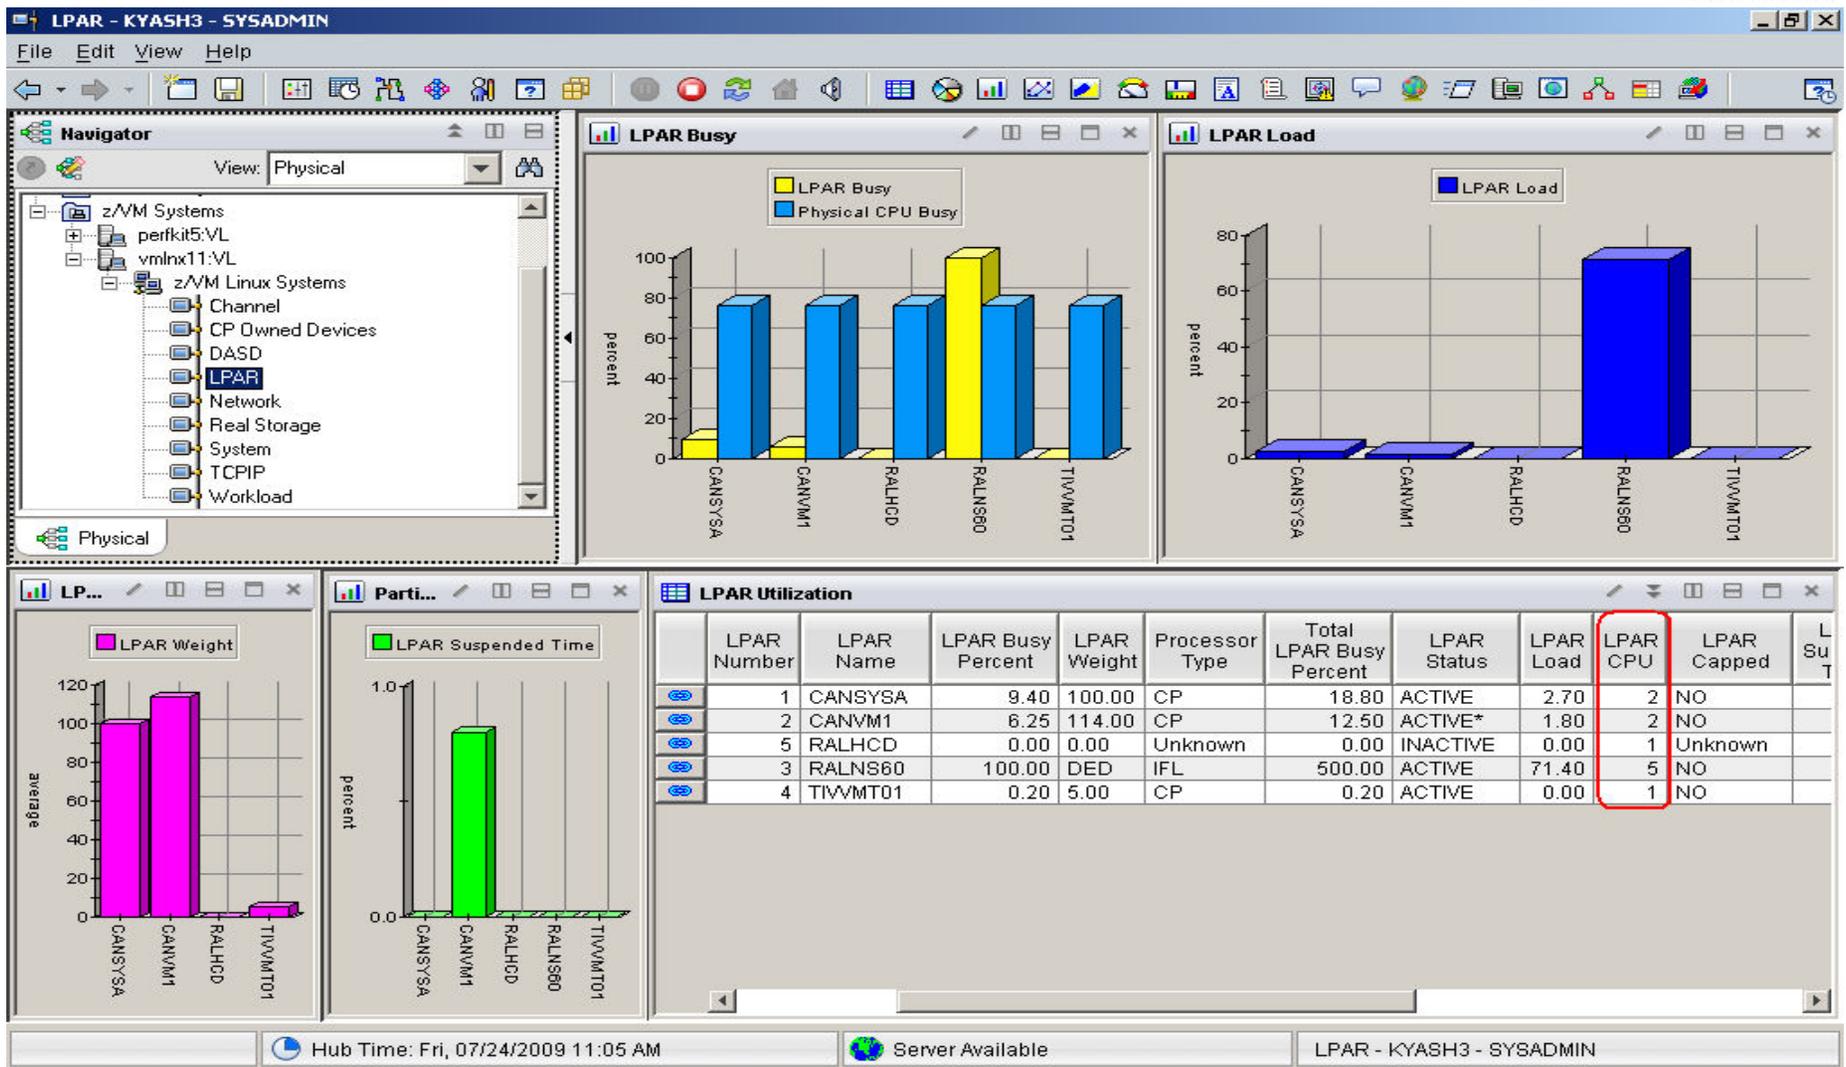





## Persistent Historical Views



This makes it easier to see anomalies, or match spikes.  
Capturing performance data as a base line is a must:

- General history data – business as usual.
- Detailed raw monitor data prior to and following any major changes.
- Ability to review attributes of a past incident.

# Persistent Historical Views

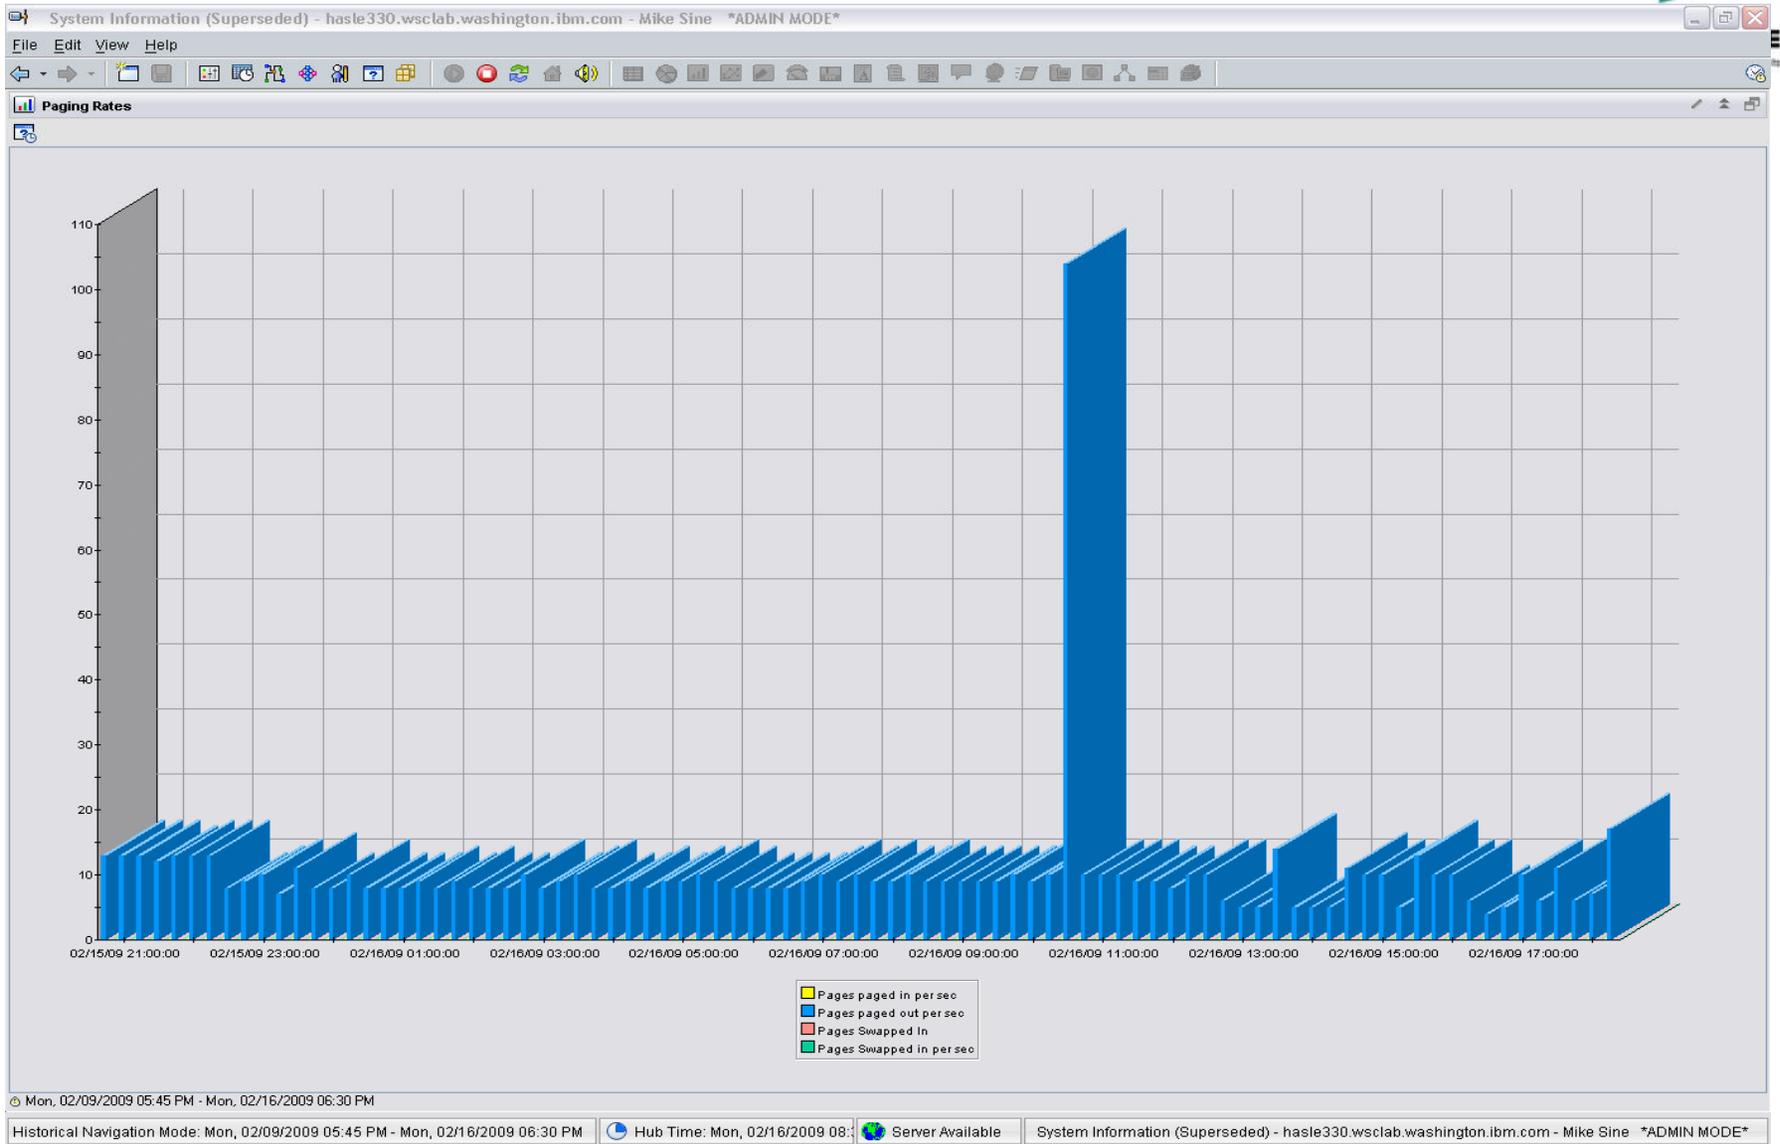

# Persistent Historical Views

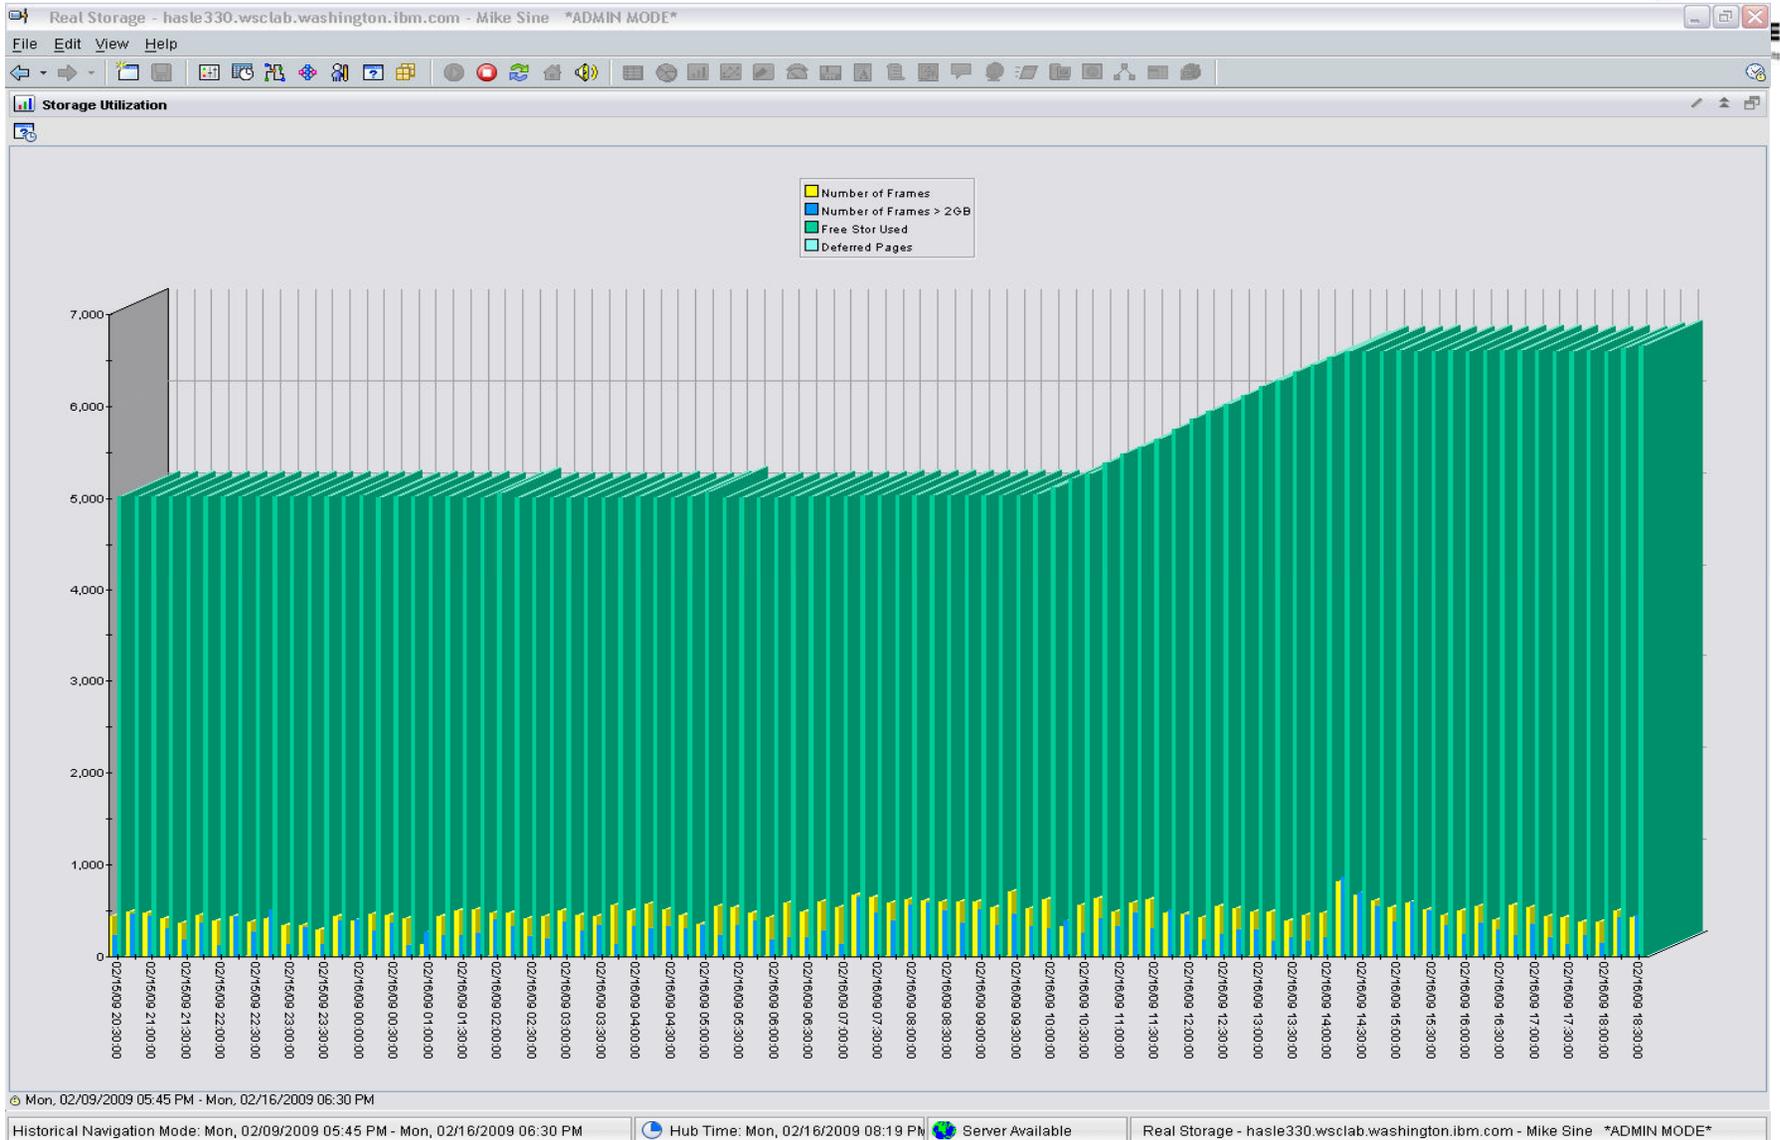

# Tivoli Common Reporting (TCR)

- TCR reports available on the OPAL website
  - <http://www-18.lotus.com/wps/portal/topal>
- What is TCR?
  - Tivoli Common Reporting.
  - Consistent approach to viewing and administering reports.
  - Built on top of open source reporting tool called: BIRT.
  - Flexible development environment (Eclipse based) for creating report definitions.
  - Five templates provided for download.
  - Taking suggestions for more

## Sample Reports Available


- z/VM VM System CPU Utilization
- z/VM VM System Paging Utilization
- z/VM Linux System CPU Utilization
- z/VM VM System CP-Owned Device Utilization
- z/VM VM System TCP Server Statistics



### z/VM System CPU Utilization

Report Period	All	Significant Resources Selected	5
Start Date	Dec 31, 1969 12:00 AM	End Date	Nov 30, 2007 11:59 PM
System ID	All	LPAR Name	All

### LPAR Busy

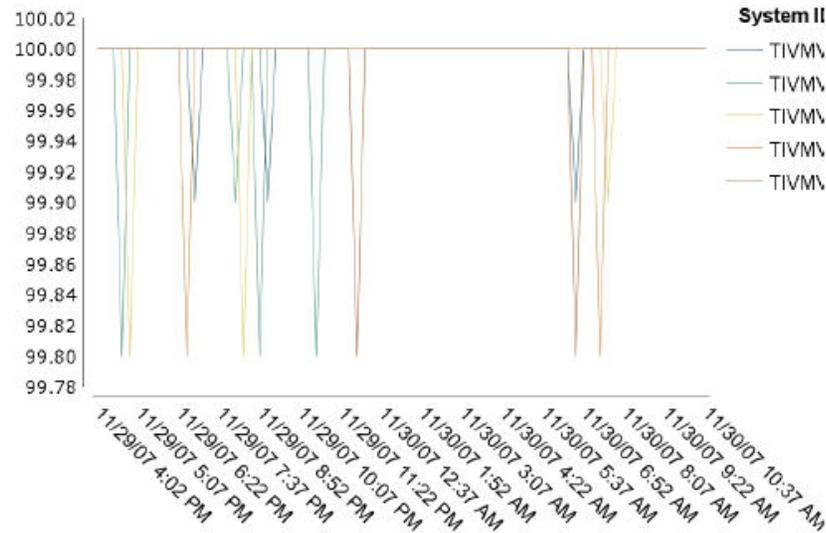

#### Available Summarization Time Periods:

- Hourly
- Daily
- Weekly
- Monthly
- Not Summarized Data

System = TIVMVS6						
LPAR Name	LPAR Busy	LPAR Load	LPAR Suspend Time	LPAR Overhead Time	Date/Time	


System = TIVMVS6					
LPAR Name	LPAR Busy	LPAR Load	LPAR Suspend Time	LPAR Overhead Time	Date/Time
RALNS31	100	4.2	0	.6	Nov 29, 2007 4:02 PM
RALNS32	100	4.2	0	.6	Nov 29, 2007 4:02 PM
RALNS61	100	4.2	0	.6	Nov 29, 2007 4:02 PM
TIVMVS1	100	2.09	0	.6	Nov 29, 2007 4:02 PM
TIVMVS10	100	2.09	0	.6	Nov 29, 2007 4:02 PM
RALNS31	100	4.2	0	.6	Nov 29, 2007 4:08 PM
RALNS32	100	4.2	0	.6	Nov 29, 2007 4:08 PM
RALNS61	100	4.2	0	.6	Nov 29, 2007 4:08 PM
TIVMVS1	100	2.09	0	.6	Nov 29, 2007 4:08 PM
TIVMVS10	100	2.09	0	.6	Nov 29, 2007 4:08 PM
RALNS31	100	4.2	0	.6	Nov 29, 2007 4:22 PM
RALNS32	100	4.2	0	.6	Nov 29, 2007 4:22 PM
RALNS61	100	4.2	0	.6	Nov 29, 2007 4:22 PM
TIVMVS1	100	2.09	0	.6	Nov 29, 2007 4:22 PM
TIVMVS10	100	2.09	0	.6	Nov 29, 2007 4:22 PM
RALNS31	100	4.2	0	.6	Nov 29, 2007 4:37 PM
RALNS61	100	4.2	0	.6	Nov 29, 2007 4:37 PM
TIVMVS1	100	2.09	0	.6	Nov 29, 2007 4:37 PM
TIVMVS10	100	2.09	0	.6	Nov 29, 2007 4:37 PM
RALNS32	99.8	4.2	0	.6	Nov 29, 2007 4:37 PM
RALNS31	100	4.2	0	.6	Nov 29, 2007 4:52 PM
RALNS32	100	4.2	0	.6	Nov 29, 2007 4:52 PM
TIVMVS1	100	2.09	0	.6	Nov 29, 2007 4:52 PM
TIVMVS10	100	2.09	0	.6	Nov 29, 2007 4:52 PM

# AGENDA

- Introduction
- Monitoring Requirements
  - Virtual Linux and z/VM performance considerations
  - Don't forget the hardware
  - Integration from hardware – systems – applications Persistent historical views
- [Enterprise Management](#)
- Operational Requirements
  - Centralized Control
  - Including all Enterprise Virtual Machines
- Integrating Monitoring and Operations
- Bringing it all together

# Addressing the trend – zEnterprise will enable management of diverse resources across diverse platforms as a single Workload

- A Platform Workload is a grouping mechanism and “management view” of virtual servers supporting a business application
- Provides the context within which associated platform resources are presented, monitored, reported, and managed
- Management policies are associated to Platform Workload
  - Currently supports Performance Policy

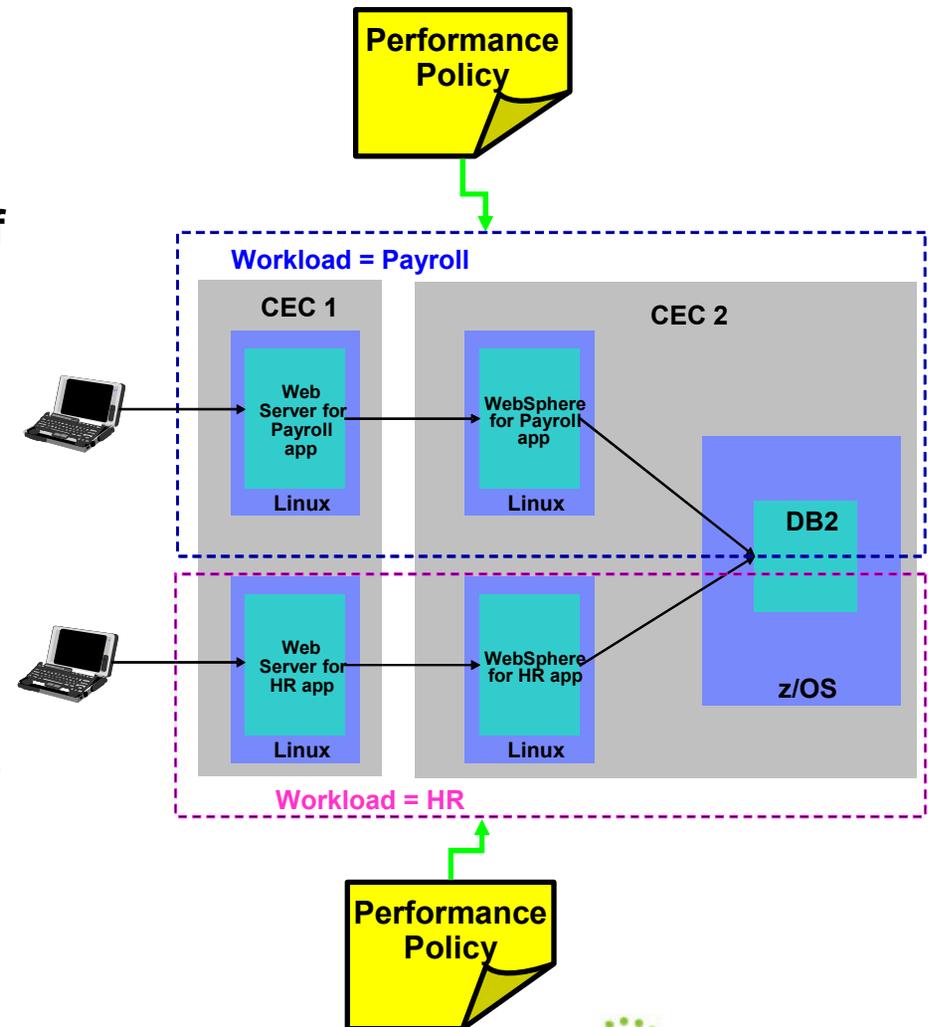

# Looking at managing the zEnterprise aka “systems of systems“ getting yourself organized..



## Visibility


See your Business

## Control

Manage service risk and compliance


## Automation

Optimize business service delivery

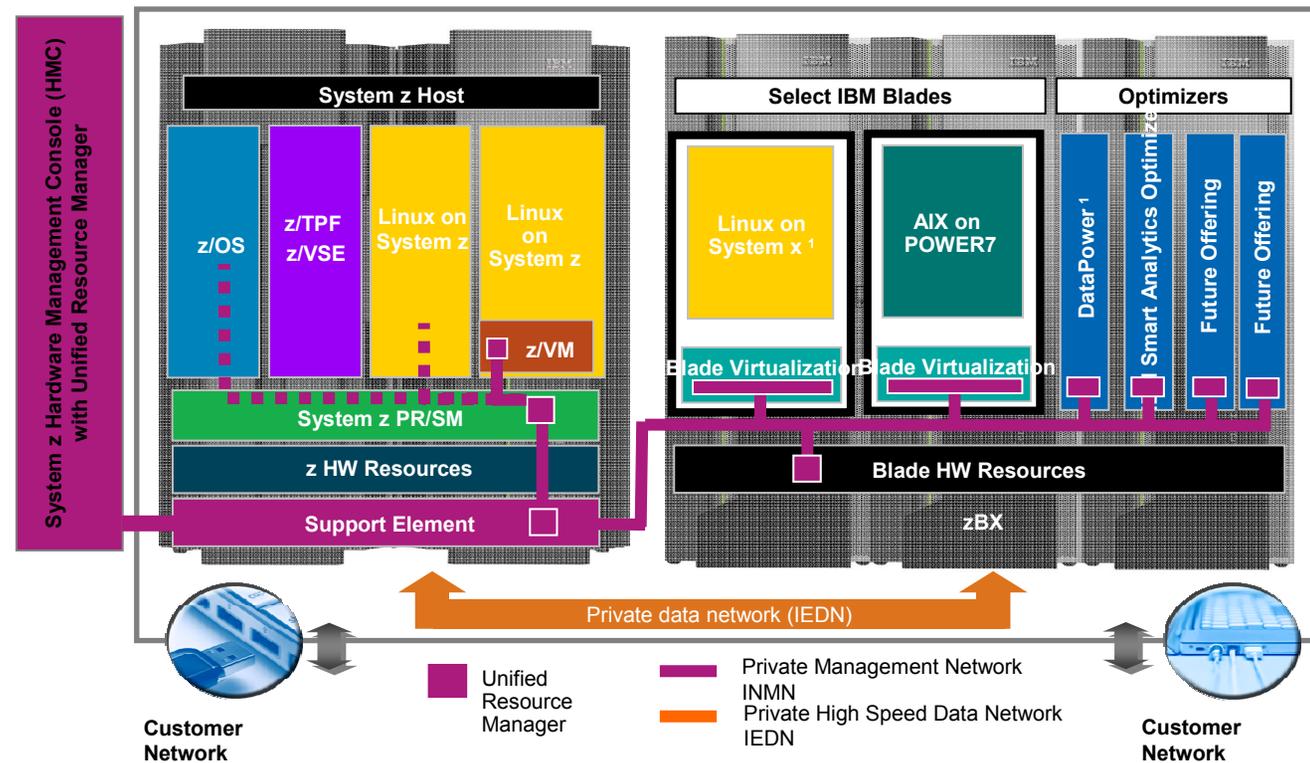


Manage different Hypervisors as Centralized resource.

# Monitoring and Managing the Enterprise – zEnterprise will enable the management of Resources across Virtual Servers

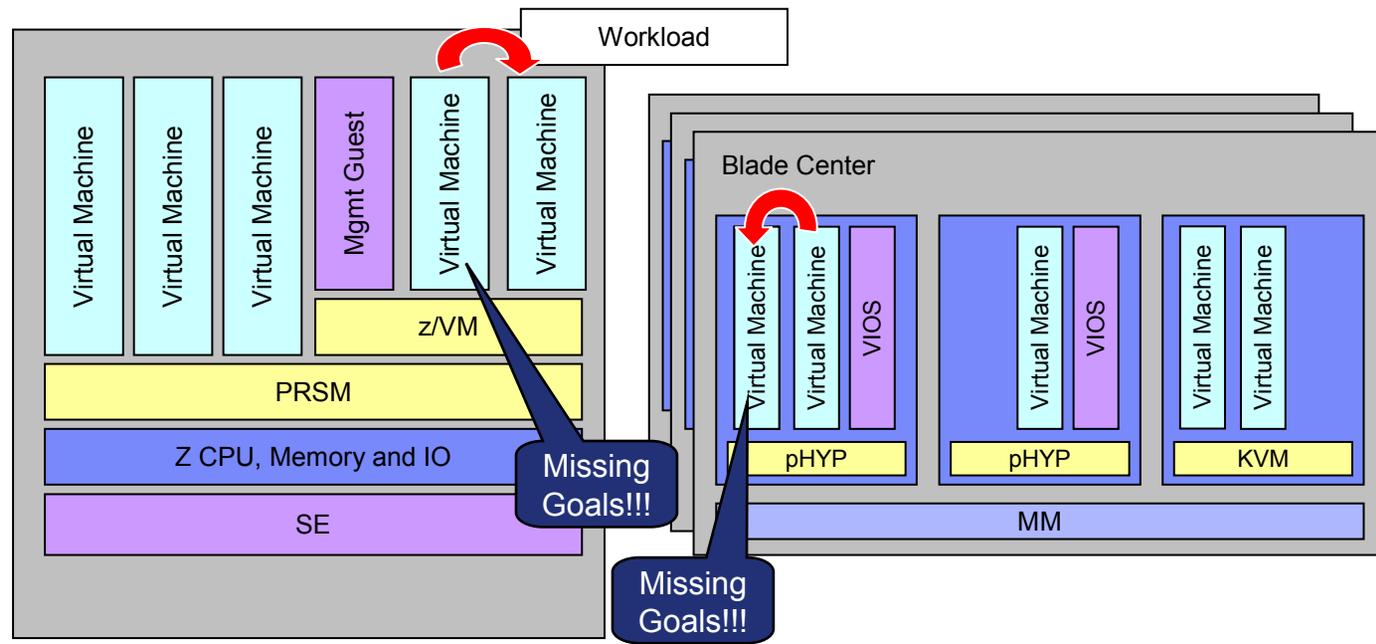


- Manage resources across virtual servers to achieve workload goals
  - Detect that a virtual server is part of Workload not achieving goals
  - Determine that the virtual server performance can be improved with additional resources
  - Project impact on all effected Workloads of moving resources to virtual server
  - If good trade-off based on policy, redistribute resources
  - Initially support CPU management

# Business views across the zEnterprise

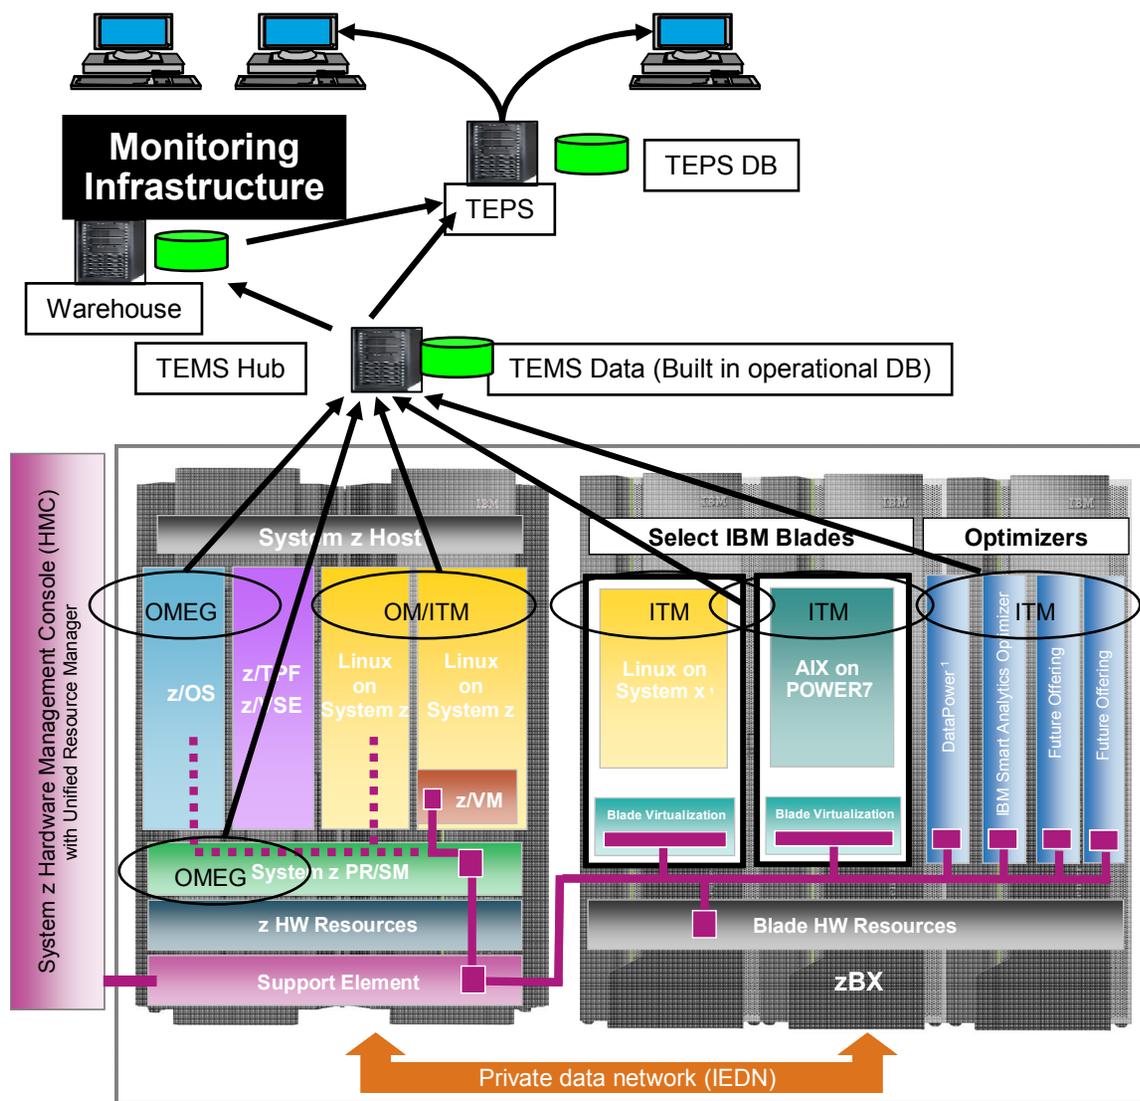


- ITM Infrastructure is shown separate to highlight components, however, each of these ITM components can reside on the zEnterprise.
- OMEGAMON agents can monitor z/OS system and subsystems, z/VM system and LPAR components, and Linux on z.
- ITM agents can monitor Linux on System z, Linux on System x, and AIX on Power7, and supported applications and databases.

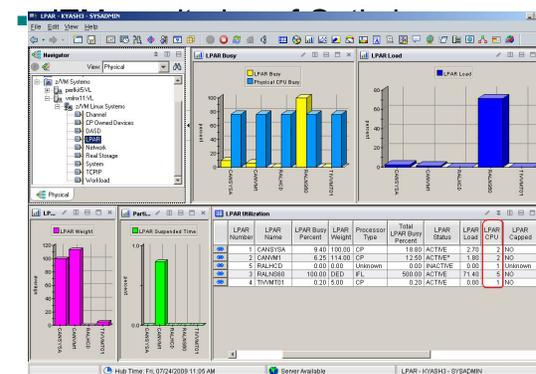

Common Interface across the zEnterprise

# The future is ensembles and multiple hypervisors

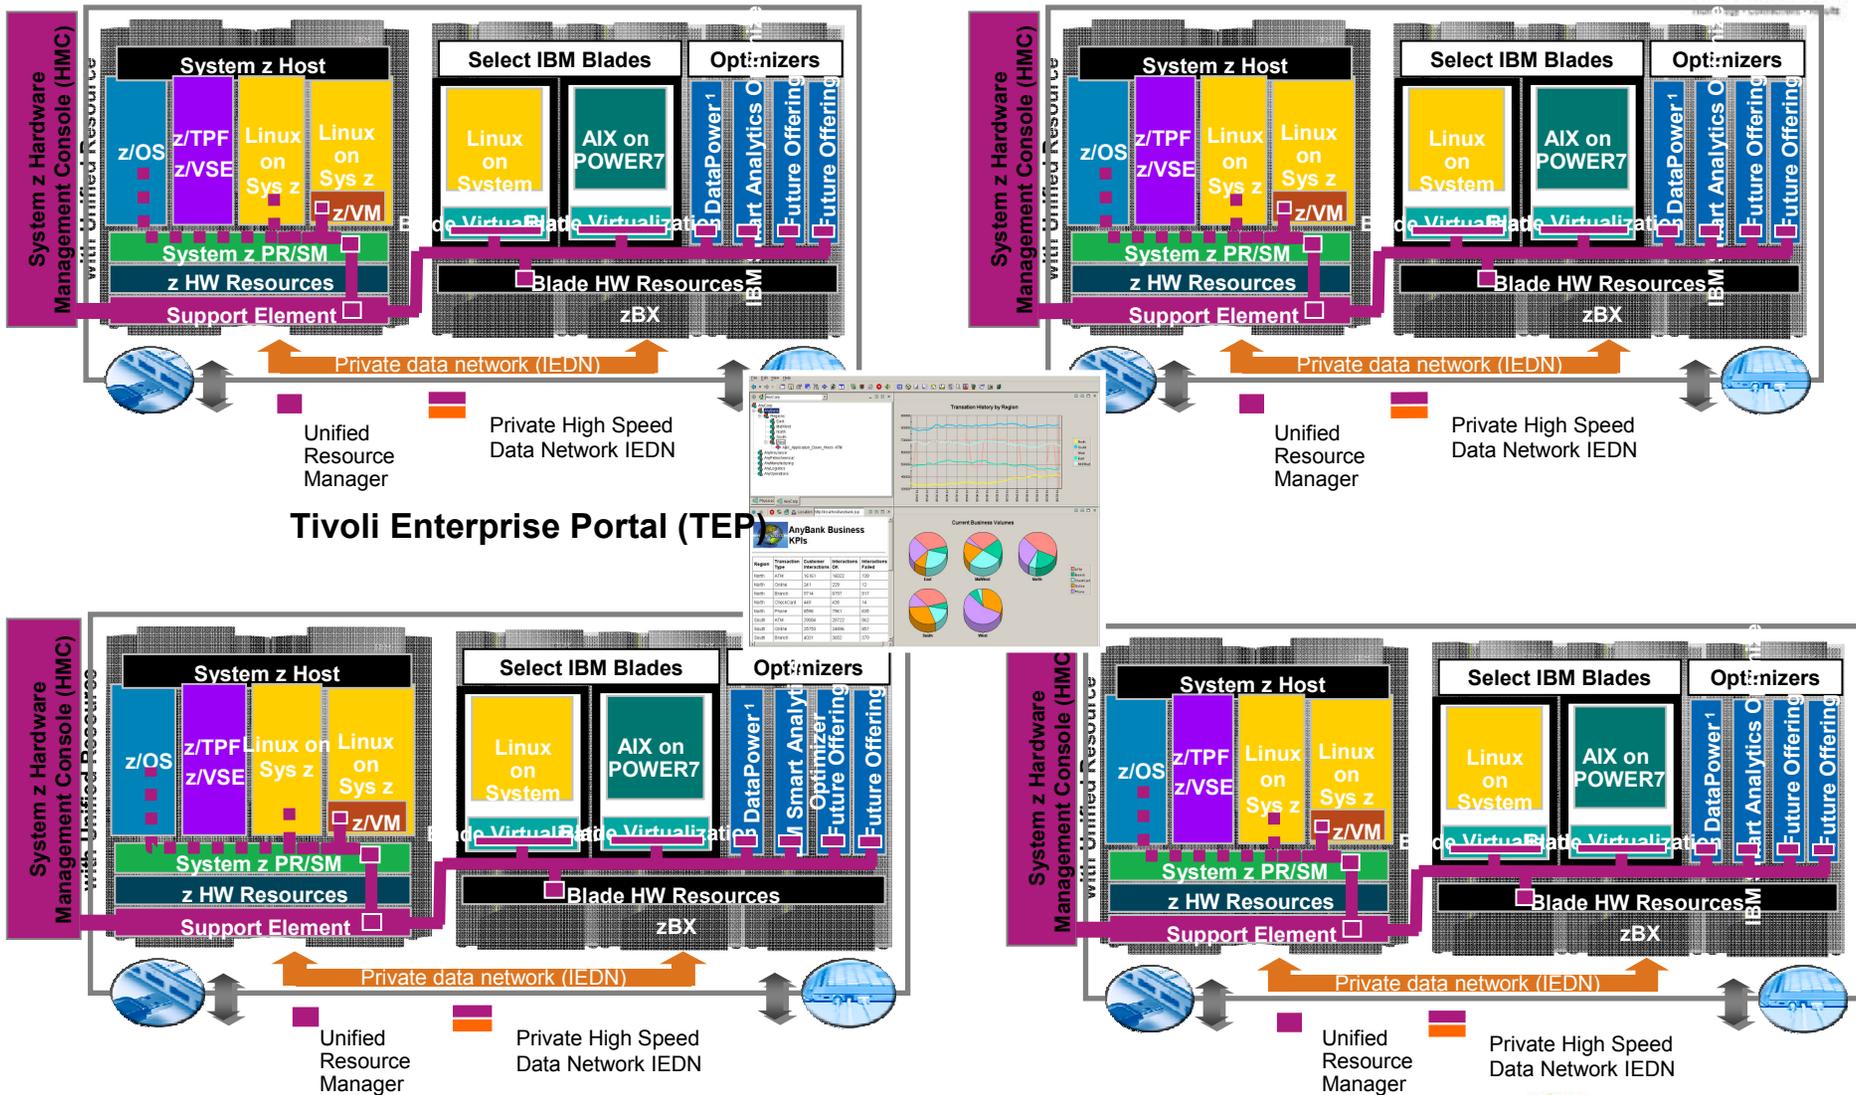

Manage different Hypervisors as Centralized resource.



# AGENDA

- Introduction
- Monitoring Requirements
  - Virtual Linux and z/VM performance considerations
  - Don't forget the hardware
  - Integration from hardware – systems – applications Persistent historical views
- Enterprise Management
- **Operational Requirements**
  - Centralized Control
  - Including all Enterprise Virtual Machines
- Integrating Monitoring and Operations
- Bringing it all together


# Operations Manager for z/VM

## Increase productivity

- Authorized users view and interact with monitored virtual machines without logging onto them
- Multiple users view/interact with a virtual machine simultaneously

## Improve system availability

- Monitor virtual machines and processes
- Take automated actions based on console messages
- Reduce problems due to operator error

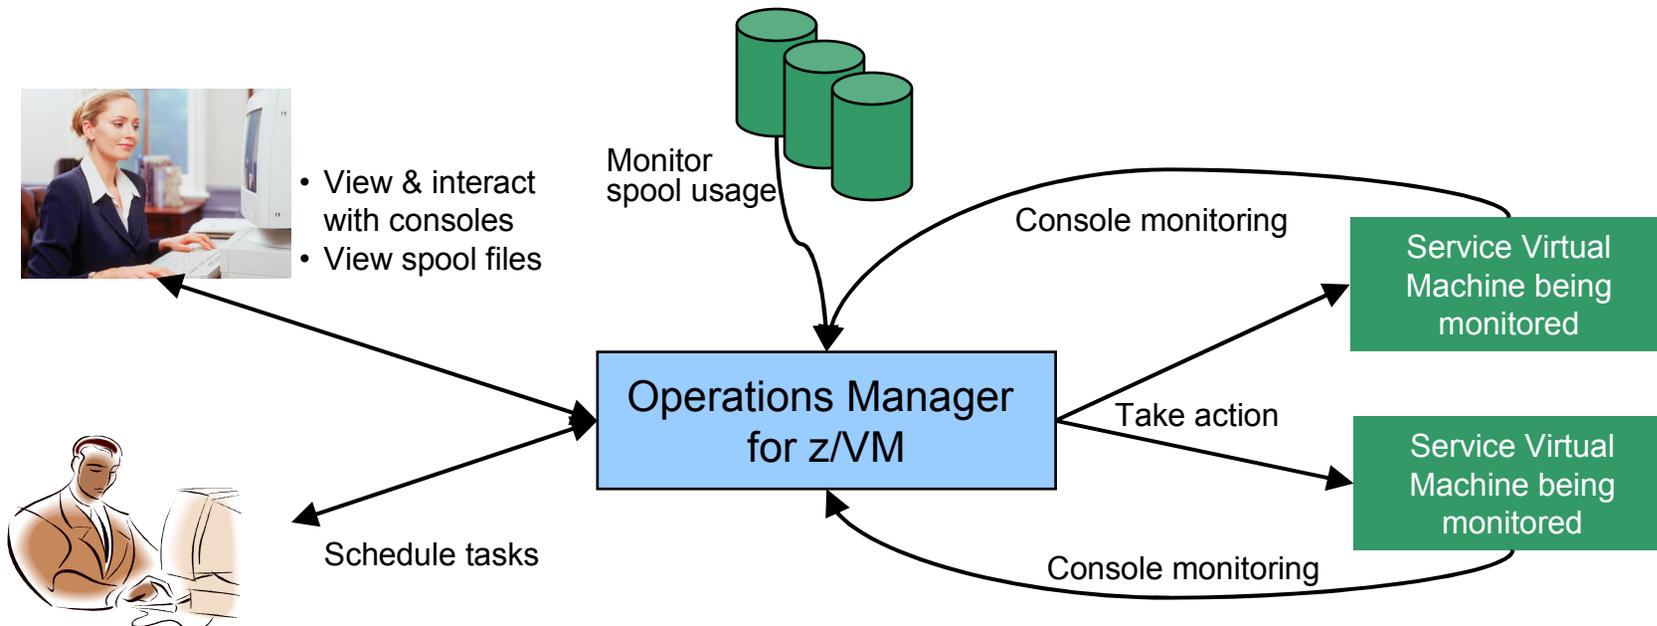

## Automation

- Routine activities done more effectively with minimal operations staff
- Schedule tasks to occur on a regular basis


## Integration

Fulfill take action requests from OMEGAMON XE on z/VM and Linux


## Features and Functions

- Monitor service machine consoles
- Monitor spool usage
- Monitor system events
- View and interact with monitored consoles from authorized user IDs
- Find and view spool files
- Schedule events/actions
- Dynamic configuration
- Separation of access control

# Monitor Service Machine Consoles

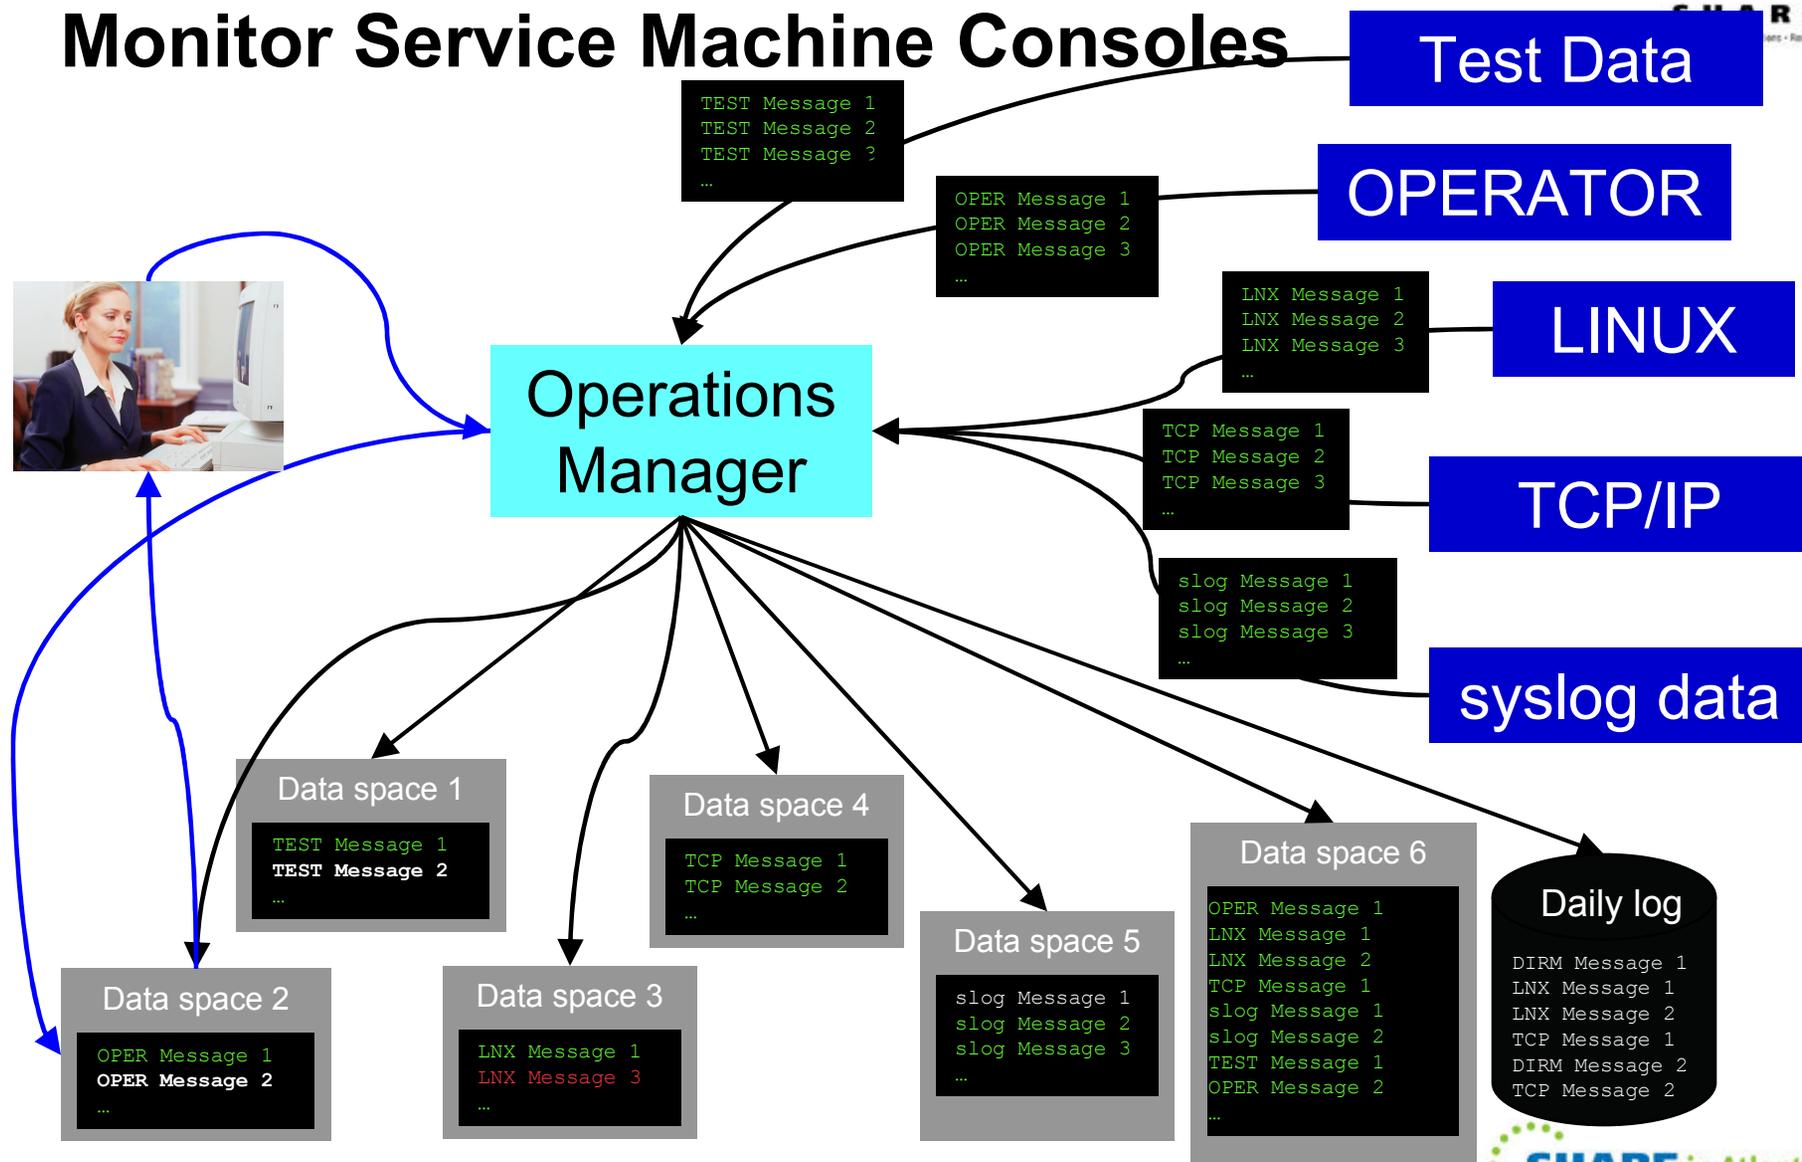

# Enterprise level console/syslog management:

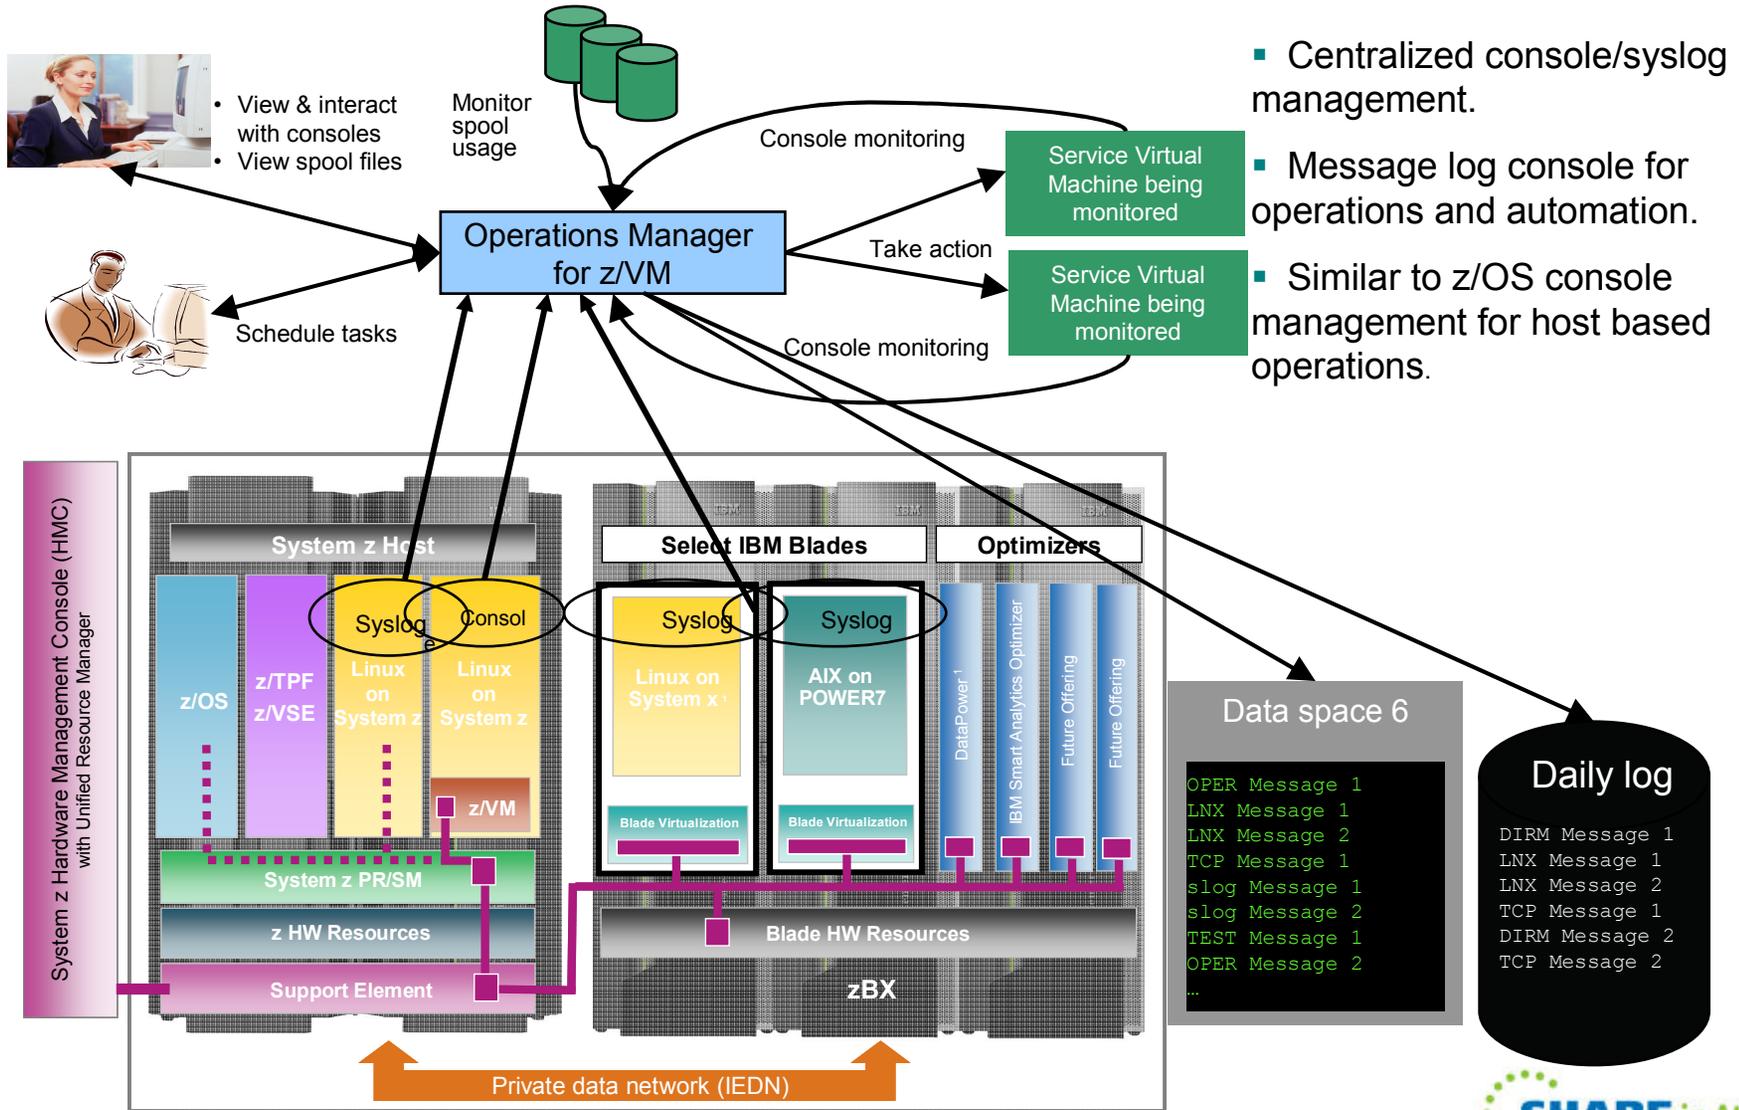

- Centralized console/syslog management.
- Message log console for operations and automation.
- Similar to z/OS console management for host based operations.

Note: All statements regarding IBM's plans, directions, and intent are subject to change or withdrawal without notice, and represent goals and objectives only.

# Monitor Service Machines

- Define rules to
  - Scan console messages for text matching
    - Includes column, wildcard, and exclusion support
    - Optionally restrict to specific user ID(s)
  - Take actions based on matches
- Multiple rules can apply to one message
  - Rules processed in order of definition in the configuration file
  - FINAL option available to indicate no additional rules should be evaluated

# View and Interact with Consoles

- Authorized users can view live consoles of monitored service machines and guests
  - Multiple users can view the same console simultaneously
  - No need to logon to the service machine to see its console
  - Test data and Linux syslog data treated as a “console”
  - Views can be defined to look at a group of consoles in one view
- Full screen mode
  - Scroll up and down to view and search historical data
  - Auto scroll (on or off) as new output is displayed on the console
  - From command line, issue commands back to the monitored console
- Amount of data that is visible depends on specified or default data space size
- Rules/actions may modify the view
  - Suppress messages from the console
  - Hold or highlight messages with color, blinking, etc.
- Authorized users can view the log file
  - Can also request a copy of the log file from today or a previous day

# Monitor and View Spool Files

- Create spool monitors to trigger actions when
  - Percent of spool usage falls within a specified range
  - Percent of spool usage increases at a specified rate
- Actions triggered can be the same actions used by console monitoring
- Authorized users can
  - Display a list of spool files based on one or more attributes
    - Owner
    - Size
    - Date created
  - From the list the user can
    - View the contents of an individual spool file
    - Transfer, change, or purge a spool file

# Schedule Events and Actions

- Define schedules
  - Hourly, daily, weekly, monthly, or yearly, nth weekday of the month
  - Once on specified month, day, year, and time
  - At regular intervals
    - Every x hours and y minutes
  - Within a specified window of time
    - Specify start time
    - Specify conflicting schedules
    - Specify maximum time to defer this schedule
  - Within limits
    - Restrict to specific days of the week: Monday through Sunday plus holidays
    - Restrict to certain hours of the day
- Specify the action associated with the schedule
  - Actions specified are the same as those for console and spool monitoring


# Respond to System Events

- Create monitors for z/VM system events (\*VMEVENT) related to user IDs
  - Logon
  - Logoff
  - Failure condition (typically CP READ)
  - Logoff timeout started
  - Forced sleep started
  - Runnable state entered (VM READ)
  - Free storage limit exceeded
- Optionally restrict to specific user ID(s)
- Specify the action associated with the event
  - Actions specified are the same as those for schedules and console and spool monitors

# Dynamic Configuration

- Initial configuration file loaded at startup
  - May imbed other configuration files
- Most configuration options can be updated while Operations Manager is running
  - Add, delete, or change:
    - Rules, actions, monitors, schedules, holidays, groups, user authorization
  - Suspend or resume rules, monitors, schedules
- Multiple methods
  - GOMCMD command interface
  - Load a new or updated configuration file
  - Commands in DEFACTN statements

# Operations Manager

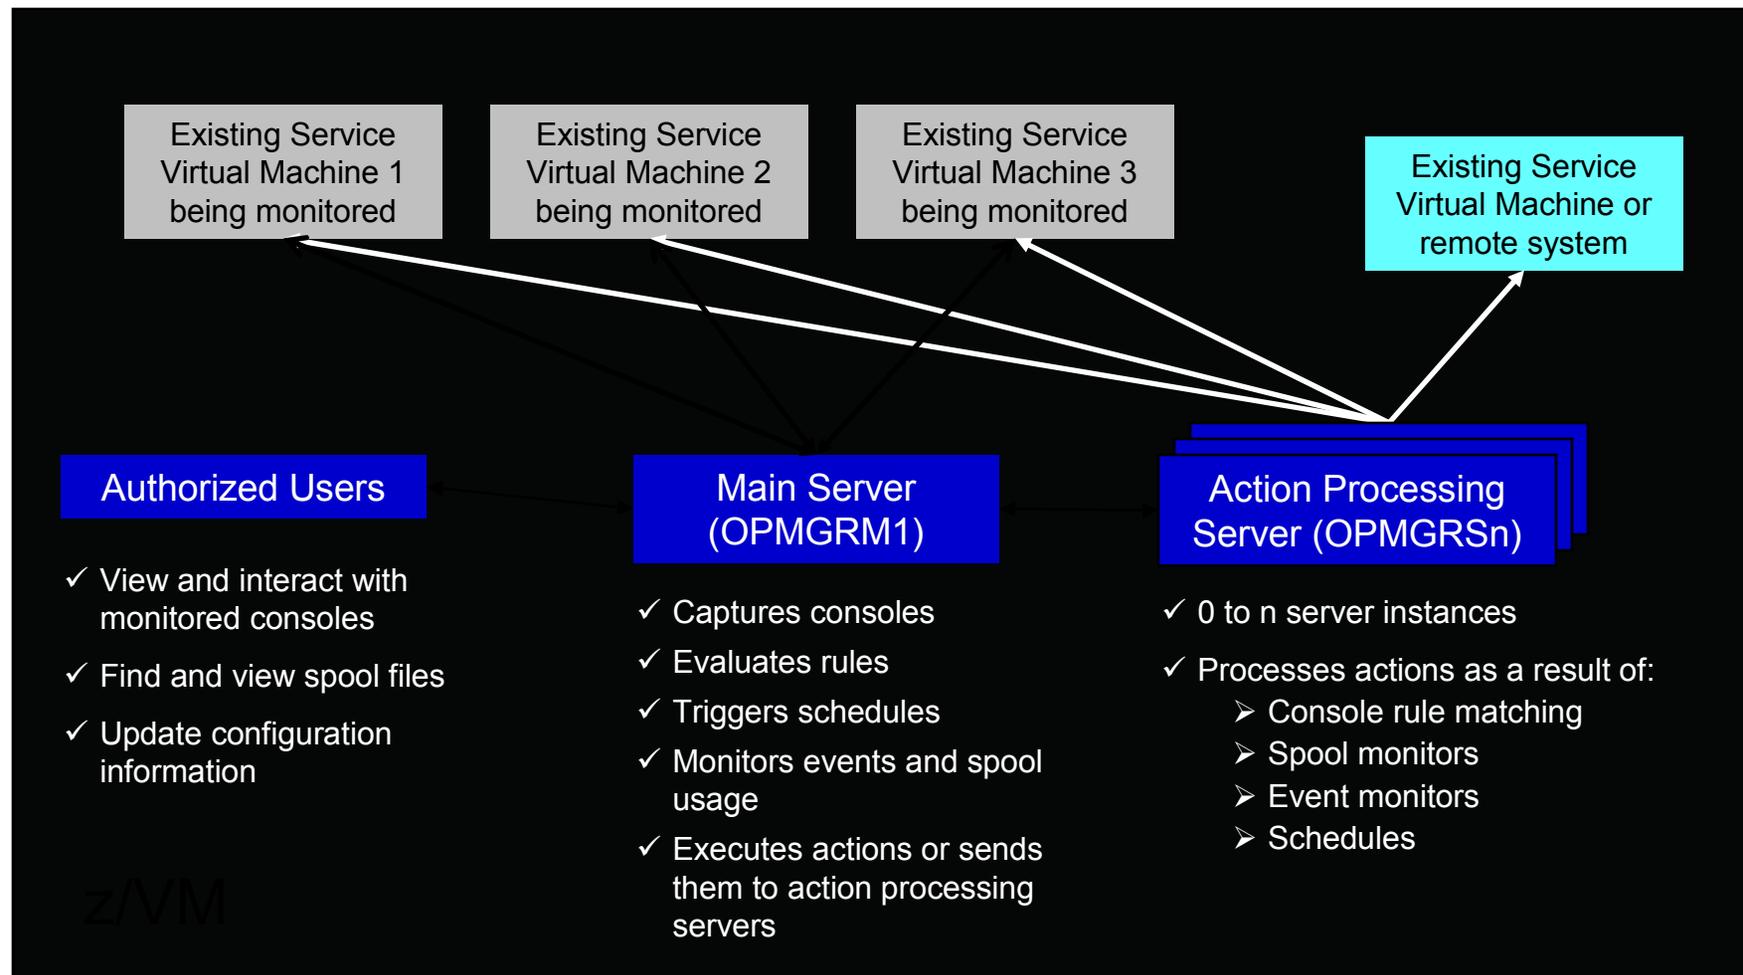

# Summary

- Use Operations Manager to
  - Automate daily operations
  - Prevent problems rather than react to them
  - Automate reactions to problems when they can't be prevented
  - Improve problem determination procedures
  - Increase programmer and operator productivity

# AGENDA

- Introduction
- Monitoring Requirements
  - Virtual Linux and z/VM performance considerations
  - Don't forget the hardware
  - Integration from hardware – systems – applications Persistent historical views
- Enterprise Management
- Operational Requirements
  - Centralized Control
  - Including all Enterprise Virtual Machines
- Integrating Monitoring and Operations
- **Bringing it all together**

## Bring it all together

**It is often that a unit of work is serviced by multiple applications and databases across multiple operating systems, including z/VM and Linux. Integrated views allow:**

- **Unit of work, or application tracking**
- **Business views**
- **Single skill sets to monitor dissimilar hardware, operating system, and application environments.**

## Application View: Scaling Scenario


- WebSphere MQ on Linux for System z receives “order requests” in the form of Queue messages, and places them on a queue.
- A WebSphere Application Server is invoked to periodically check the queue for messages and process them to a DB2 on z/OS database.
- The orders are coming too fast for the Websphere application to process.
- A second Linux server is started with another copy of Websphere application server to aid in the processing of requests.

# Application View: Scaling Scenario



- Trigger: Queue Depth
- Options for triggering actions can be based on things such as:
  - The number of orders received but not yet processed (the number of messages on the queue)
  - The amount of time it is taking to process the orders
  - The response time of the web application
  - The CPU usage of the z/VM Guest
  - Other things I haven't given much thought to yet.

# MQ Series Queue growth started



**Navigator**

View: P1Orders

- P1Orders
  - P1Orders\_Guests
  - P1Orders\_MQ
  - P1Orders\_Web
  - P1Orders\_zVM

Physical | P1Orders

**Order Processing Time - M...**

ORDERS	PROCSECS
8	189

**Order Processing Guests**

Order Processing Guests

User ID
1

**Daily Parts Orders**

PART	ORDERS	QUANTITY	AVGPROCSECS	MAXPROCSECS	LocalTimeStamp
GIZMOS	1	679	247	247	2008/05/09 11:46:51 030
FOOBARS	2	1149	197	216	2008/05/09 11:46:51 010
THINGYS	2	918	190	231	2008/05/09 11:46:51 040
GADGETS	2	1740	164	195	2008/05/09 11:46:51 020
WIDGETS	1	793	163	163	2008/05/09 11:46:51 050

**z/VM guest processor ...**

z/VM guest processor usage

**Applica...**


**Orders R...**

**Bar Chart**

**z/VM Resources allo...**

Linux Guest ID	Time
OOSP1A.ESMTS105:LZ	05/09/08 11:46:27

# Scaling Scenario

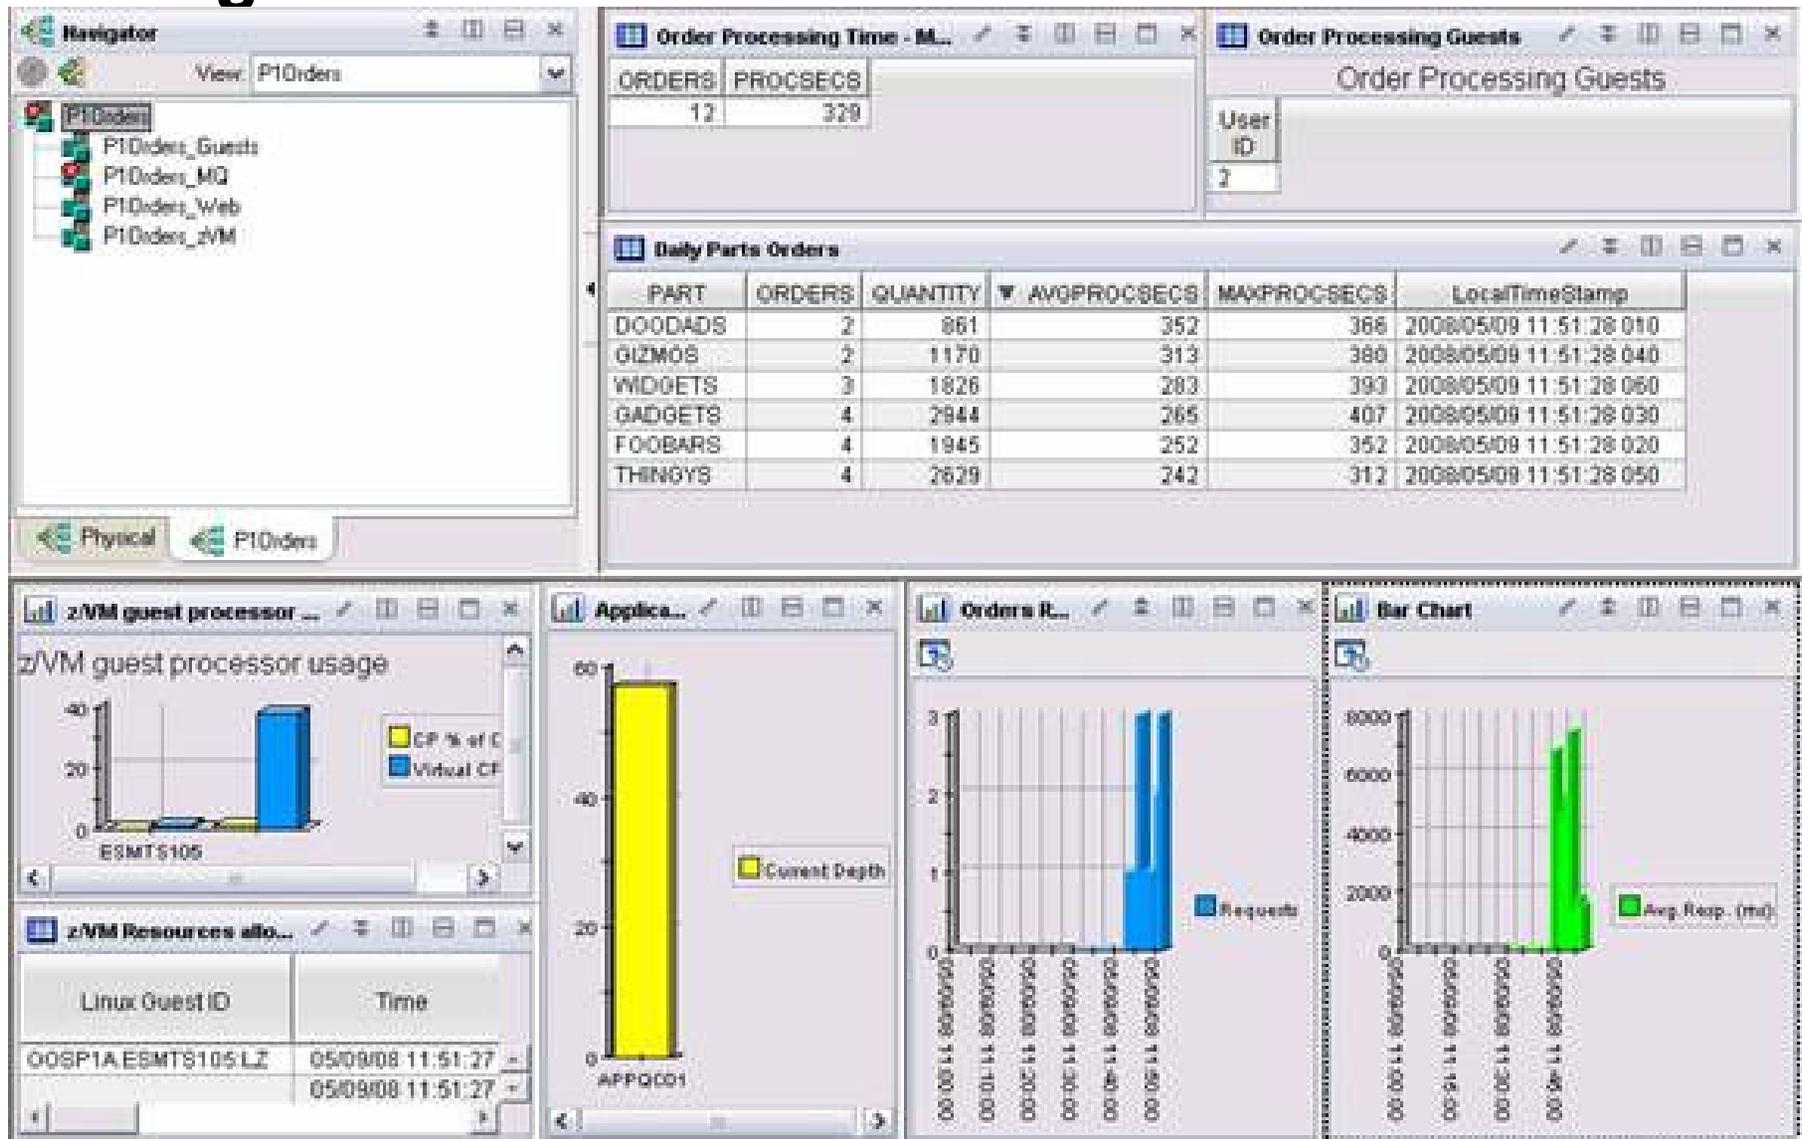

# Adjusting Resources for a Linux Guest

- Virtual CPU consumption is high for a Linux guest
- Detect the alert
  - Automation receives the message
- Action is triggered by a rule in Operations Manager
- Operations Manager issues CP commands to tune the guest
  - SET QUICKDSP
  - SET SHARE
- Ability to monitor the output is key

# Adjusting resources for a Linux guest



SHARE  
Connections - Results

The screenshot displays the IBM Tivoli Enterprise Portal interface for monitoring a virtual machine named 'HighCPU'. The interface is divided into several sections:

- Navigator:** Shows a tree view of the VM's components, including Channel, CP-Owned Devices (Paging, Tooling), DAVID, LPAR, Network, Real Storage, System, TCP/IP, and Virtualized. The 'HighCPU' VM is selected.
- SLPARMT Process View:** A 3D bar chart showing resource usage for 'Process System CPU (P=40)' and 'Process User CPU (P=40)'. The Y-axis ranges from 0 to 400000.
- Situation Event Console:** A table showing a critical event: 'Critical Open Demo\_CPU\_high' with a display item of 'HighCPU.wm'.
- Plot Chart:** A line graph showing 'Virtual CPU %' over time. The Y-axis ranges from 0 to 25. A sharp spike is visible around 11:00:00.
- Terminal:** A log window showing system messages related to SPARMT configuration changes, including 'share for SPARMT successfully changed', 'BIG PWR ON(40): GREAT NEED CPU PRIORITY', and 'LIMITING absolute to 4'. The log includes timestamps from 11:40:00 to 11:50:11.

At the bottom of the interface, there is a status bar with the following information: 'Hub Drive: Wvd, 057142088 03:33 PM', 'Server Available', 'HighCPU - 9.83.38.31 - SYSADMIN \*ADMIN MODE\*', and 'Internet'.

# OMEGAMON Configuration

- Define a situation (alert) to detect high CPU consumption for Linux virtual machines.
- Define the automated “Take Action” to:
  - Direct a message to console monitored by Operations Manager.
  - Include in the message keywords to trigger Operations Manager rule.
    - Guest Name
    - Guest need CPU priority text
    - Any unique data desired for specific customer environment.

धन्यवाद

Hindi

多謝

Traditional Chinese

감사합니다

Korean

Спасибо

Russian

Gracias

Spanish

شكراً

Arabic

Thank You

English

Obrigado

Brazilian Portuguese

Grazie

Italian

多谢

Simplified Chinese

Danke

German

Merci

French

நன்றி

Tamil

ありがとうございました

Japanese

ขอบคุณ

Thai